








MASTERVOLT

MARINE
SPECIALITY VEHICLE
INDUSTRIAL
RV



TAKING YOU FURTHER

Navico Group is the world's leading supplier of integrated systems and products to industries ranging from marine to recreational vehicle and beyond. We offer an unmatched portfolio comprised of industry-leading brands in power management, digital control & monitoring, networked devices and marine electronics.

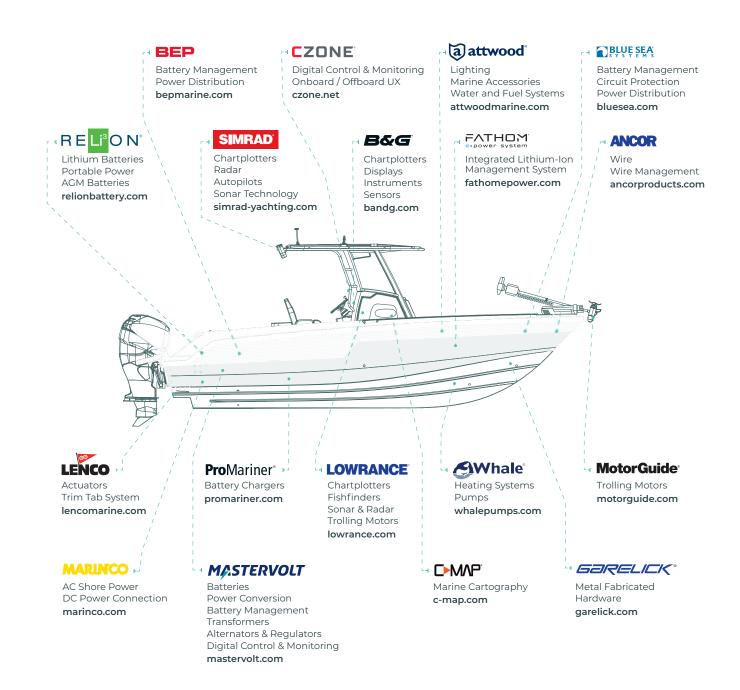











What makes Mastervolt different:

Mastervolt is a strong, innovation-driven brand. This capacity to innovate is what truly sets Mastervolt apart. Mastervolt leads the marine and mobile industries in autonomous power solutions. Technologically advanced Lithium Ion batteries and fully integrated power conversion equipment provide off-grid power whether on the water or on the road.

I Innovation and Product Development

From power conversion and storage to integrated systems, Mastervolt products are at the forefront of technology. Pioneering research is within the brands DNA, highly skilled engineers are responsible for translating tomorrow's technology into the ultimate performance of today. With comprehensive processes, the Mastervolt team sources and tests the best components and pushes all new product designs to the limits, ensuring the most reliable and complete end product. In essence, customers will receive the highest quality products.

I System Solutions

Whatever the industry or application, Mastervolt products are power solution focused and designed to easily integrate into comprehensive systems. From DC battery power and power conversion products to complete digital switching technologies and monitoring at the touch of a finger, Mastervolt products provide the flexibility and can be fully customized for your applications.

I Vertical Integration

Add the vertical integration capabilities of a Fathom® e-power system, and you get cutting-edge lithium-ion power management: extended time away from the charge source provided by more battery capacity, intuitive digital controls, and power consumption monitoring. In addition, users have complete control as they receive information on demand, allowing them to monitor all power consumption easily. The noise, vibration, and fumes associated with traditional generator experiences being eliminated is an added benefit. Discover more at fathomepower.com

I Worldwide Network

The Mastervolt brand offers a global service. With offices and partners in more than 80 countries, top class brand expertise and support is available throughout the world. Our customers know that wherever they are, efficient support is on hand whether it is a technical enquiry or to track the progress of an order.





16

CombiMaster® Inverter/Charger

The CombiMaster inverter/charger provides the most power and charging in the series. The new 3500W version comes in 12V and can be paralleled stacked in a single system up to 10.5kW. The new 24V models in 3500W & 4500W and 48V 5000W unit can create parallel and series stacked systems to power up to 35kW and be used to power split phase loads. All models provide pure sine wave inverter power and over 60-200A multi-chemistry battery charging, plus the intelligent new design is NMEA 2000® and MasterBus® compatible.

Part # 35513500	CombiMaster 12/3500-200A 120V
Part # 35523500	CombiMaster 24/3500-100A 120V
Part # 35524500-HT	CombiMaster 24/4500-100A 120V
Part # 35545000-HT	CombiMaster 48/5000-120A 120V
Part # 6502200010	CombiMaster Current Sharing cable 1 mtr
Part # 6502200030	CombiMaster Current Sharing cable 3 mtr
Part # 6502200060	CombiMaster Current Sharing cable 6 mtr
Part # 6502200410	CombiMaster Communication cable 1 mtr
Part # 6502200430	CombiMaster Communication cable 3 mtr
Part # 6502200460	CombiMaster Communication cable 6 mtr
Part # 6502200500	Mastervolt Cable Strain Relief Bracket
Part # 6502200600	CombiMaster Cabel Kit for 2 units in Parallel
Part # 6502200700	CombiMaster Cabel Kit for 3rd unit in Parallel
Part # 6502200800	CombiMaster Cabel Kit for Split phase operation



48

Mac Plus

The Mac Plus is the most advanced solution for all DC-to-DC solutions no matter if it is charging or converting no matter the circumstances. Let the Mac Plus do the hard work for you to make sure you always have an optimal working system.

The Mac Plus solves mixed voltages in a system with its current limiting and charging capabilities. Its acceptance of a wide range of inputs. Bi – direcitonal means it can control in either direction.

 Part # 81203105
 Mac Plus 48/12-50

 Part # 81203205
 Mac Plus 12/48-15

 Part # 81203305
 Mac Plus 48/24-30

 Part # 81203405
 Mac Plus 24/48-15



66

MLI Ultra Lithium Ion Series

The MLI Ultra series delivers ultimate Lithium Ion performance even under the harshest conditions, such as high charge and discharge currents, wet environments, mechanical shocks or vibrations. This is realized by combining our best Lithium-Iron Phosphate (LiFePO4) cells with a proprietary Battery Management System (BMS) inside a sturdy, waterproof housing.

Part # 66013000 MLI Ultra 12/3000 Part # 66016000 MLI Ultra 12/6000 Part # 66026000 MLI Ultra 24/6000



108

Alpha 24/150

Fast & complete charging of starter and service batteries. Power supply for all consumers. 12 V and 24 V versions. 75 A to 150 A charge current. Alpha alternators are equipped with several fixations for customised alternator brackets, Fast charging, even at a stationary rpm. Standard alternators only supply the specified capacity at a high rpm. Alpha Compact offers lower weight, smaller dimensions and reduced fuel consumptions.

Part # 48224152 Alpha 24/150 Part # 48624152 Alpha Pro

Table of Contents

Power Conversion

Mastervolt® Inverter/Chargers	8	
PowerCombi	19	
Sine Wave Inverters	20	
AC Master	26	
Battery Chargers	32	
DC-DC Converters	46	
AC Transfer Systems	56	



NEW





p. 48

Batteries

Lithium Ion Batteries	64
Gel Batteries	68
AGM Batteries	70





p. 66



p. 68

Fathom Integrated Systems

Fathom Overview 74

Digital Control & Monitoring

CZone Overview	78
Fully Integrated CZone & MasterBus System Diagram	80
MasterBus Displays	84
MasterBus Network Components	86
MasterBus Interfaces	87
MasterBus Accessories	91



p. 80





Battery Management

BI Battery Isolators	94	Jela.
Battery Mate	94	
Charge Mate	95	
Battery Monitoring	96	p. 91
		p. 91
		807.

Transformers

Mass GI	100
IVET Heavy-duty	100



p. 98



Alternators & Regulators

Alpha Alternators	106
Alpha Charge Regulators	110



p. 104



p. 106



p. 108

Solar ChargeMaster

Solar ChargeMaster	11
Solai Cilaigelviastei	1.1

Index

art Number	Index	1	1	-
artivullibei	IIIUEA	- 1		1

POWER CONVERSION

Inverter/Charger Combination



Mastervolt[®] inverter/charger combinations integrate a powerful battery charger, a quiet and efficient inverter and a versatile switching system in one robust, lightweight and compact device. This multifaceted product offers a carefree power supply for recreational and professional use.

Each CombiMaster®, Mass Combi® Ultra / Pro can be used as an automatic stand-alone device for a non-stop power supply or as part of a larger power system.

AC Master & Mass Sine Wave Inverters



Mastervolt offers a complete range of inverters from 300 watt to 40 kWatt. The AC Master is ideal for small and mediumsized applications, while Mass Sine Inverters and the advanced Sine Ultra Inverters are mainly intended for larger systems and for professional purposes. Mastervolt offers inverters for 230W/50Hz and 120W/60Hz.

ChargeMaster Plus & Mass Battery Chargers



The ChargeMaster Plus are suitable for recreational and semi-professional use and safely charges multiple battery banks at the same time.

Mass battery chargers are great for the tougher tasks in professional and semi-professional situations. With its integrated alarm functions and various approvals, the Mass is the best choice for professionals.



POWER CONVERSION



Ocean Race's grueling and challenging conditions are a testament to the quality engineering and design put into each Mastervolt product aboard.

Mastervolt® Inverter/Chargers:

High-quality power supply with first-class comfort, wherever you are

Inverter/Chargers integrate a powerful battery charger, a quiet and efficient inverter and a versatile switching system in one robust, lightweight and compact device. This multi-faceted product offers a carefree power supply for recreational and professional use.

Possible applications vary from launches to yachts, from campers to demo trucks, from holiday homes to remote businesses, and from backup systems to grid connected systems with energy storage. Each Mass Combi, Mass Combi[®] Ultra and Mass Combi Pro Inverter/Charger can be used as an automatic stand-alone device for a non-stop power supply or as part of a larger power system.



MasterBus®/CZone® Compatible



The endless MasterBus configuration possibilities are ideal for advanced system integration. The MasterBus interface allows direct modification

of system parameters with immediate result. For applications that require duplication (series build of systems) CZone communication is ideally suited. You simply design the configuration file and duplicate this to all systems with one click.

Which Inverter/Charger suits you?

Mass Combi Ultra

The Mass Combi Ultra is more compact, stronger and more efficient. In addition to easy installation and higher capacities, the Combi Ultra has various unique benefits such as full capacity in high temperatures, an integrated solar charge regulator, and separate grid power and generator inputs. Up to ten units can be parallel switched plus a 3-phase power supply. Available for systems ranging from 3,000 watt to 40 kW, designed for professional and semi-professional use.

Mass Combi Pro

The Mass Combi Pro is the perfect solution for professional applications. This version has all the Mass Combi Ultra features but without solar input and secondary charger. The Pro provides the optimal balance of strength, versatility and cost.

CombiMaster®

This latest Mastervolt innovation delivers unmatched performance at



an unprecedented price, and offers the best of both worlds: an advanced battery charger and a quiet inverter combined in one compact device. The CombiMaster is easy to install without expert know-how thanks to plug & play capability. With a single AC input and intuituve LEDs, it is compatible with MasterBus, CZone and NMEA 2000®, the CombiMaster ranges from 1500 to 5000 Watt. Suitable for recreational and semi-professional use.





Power Assist for extra power

If you require more power than the grid or generator can provide, the Mass Combi series will make up the shortfall by inverting from the battery. The Combi also ensures that the battery is recharged once the peak demand has passed.





Ease of installation

The integrated design of three devices into one, lightweight body and robust mounting clamps give considerable savings in (labor) time and costs.



Full system integration

Available in 12V, 24V, and 48V customizable kits, the Fathom e-power system is designed to seamlessly integrate into a wide range of boats and recreational vehicles. With optional add-ons for system enhancements and customized configuration, the Fathom system is adaptable to virtually any application.







Exceptional performance

The inverter is quiet, clean and efficient, and offers the full capacity even in extreme ambient temperatures. Pure sine wave energy and a peak capacity of 200% guarantee a problem-free start, even for the heaviest loads.

Not just any battery charger

The built-in battery charger uses Mastervolt's proven 3-step+ charging technology to allow the optimal charging of all battery types, including our advanced Lithium Ion models. The battery charger supplies a maximum charge current, even with a higher charge voltage, and speeds up the complete recharging of your batteries.



Mass Combi[®] Ultra & Mass Combi Pro Inverter/Chargers: Powerful, complete and versatile

The Mass Combi Ultra series comprises several models, varying from 3000 W to 3500 W. For higher capacities up to 35 kW the Mass Combi Ultra can be used in parallel or 3-phase configurations. An efficient and integrated solar charge regulator helps make the most of your solar panels.

The Mass Combi Ultra Inverter/Charger is equipped with the latest technologies. The new inverter technology ensures a uniquely low stand-by use, while an ultra-fast digital signal processor guarantees seamless switching between all available energy sources. Power assist prevents power dips and failures, even with a weak electricity connection or small generator. Moreover, all Mass Combi Ultra Inverter/Charger models are equipped with MasterBus®.

Higher yield from solar energy

At Mastervolt® we used our knowledge gained in the grid connected solar sector to make a super-efficient built-in MPPT (Maximum Power Point Tracker) solar charge regulator. Compared to most solar charge regulators on the market, the MPPT offers up to 30% more yield from solar panels. The solar panels power 'hidden' consumers and keep your batteries in optimal condition.

'Pro' models

For professional applications, Mastervolt offers a 'Pro' model, featuring all Ultra functions, but without the solar input and second charger output battery charger.


Mass Combi Ultra Features

- · For professional and semi-professional use
- Quiet, powerful inverter with 200% peak power
- Compact, lightweight and hum-free thanks to HF technology
- Pure sine wave voltage prevents malfunctions and damage to sensitive equipment such as adapters
- · High yield and more power from your batteries
- Intelligent 3-step+ battery charger with low DC ripple current for fast charging times and long battery life
- · Power Assist: prevents blown fuses
- A dynamic battery voltage window allows you to enjoy AC power for longer without damaging your batteries
- Active Optima Cooling concept prevents unnecessary fan noise
- Charges two individual battery banks simultaneously (Mass Combi Ultra)
- An integrated MPPT solar charge controller allows for 30% more yield from solar power for charging the batteries (Mass Combi Ultra)
- Quick installation and reliable professional connections
- CE and ABYC certified



Standard MasterBus® System—Mass Combi Ultra and Mass Combi Pro Inverter/Chargers—230V up to 35 kW

- Compact and lightweight inverter/charger combination
- Two AC inputs with seamless transfer between generator and shore power
- · Integrated MPPT solar charger regulator
- Parallel & 120/240V Split-Phase operation (with the use of autoformer)
 - Mass Combi Ultra Inverter/Chargers
- **5** EasyView 5
- **2** Generator
- **6** AGM starter battery
- **3** Grid power
- 1 Lithium Ion (LiFePO4) battery
- Grid power
- 4 Solar panel

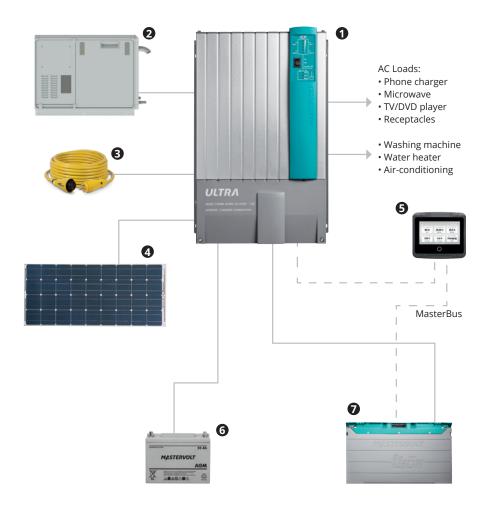

Auto Transformer



120V/240V split-phase operation

For more powerful systems the Mass Combi Ultra and Mass Combi Pro Inverter/Chargers allow parallel use up to 10 units. With 240V input and the use of an auto transformer the units provide 120/240V split-phase. Powering the 120V and 240V ships AC loads.



Best in class performance

The Mass Combi Ultra and Mass Combi Pro Inverter/Chargers can provide continuous inverter power at 105°F (40°C) with a 200% startup surge. The battery charger is best in its class providing a powerful charge to the main house battery bank.

Ease of installation

The carefully designed connections were optimized for installers. Installation and connection have been made quick and easy via a logic layout, solid terminals and by removing the need for cable glands.

Dual AC inputs and outputs

The Mass Combi Ultra and Mass Combi Pro Inverter/Chargers have inputs for generator or mains supply, each optimized for the power source. A robust intelligent transfer system switches seamlessly between AC power, generator and inverter, and ensures a constant power supply. Flickering lights or failure of electronic equipment belong to the past. Separate AC outputs provide the ability to power heavy users via mains and/or generator.

Higher yield from solar power

On the DC side the Mass Combi Ultra Inverter/ Chargers has interesting features such as the solar input and the second charger output. Mastervolt has leveraged on the knowledge gained in the grid-connected solar sector to make a super-efficient built-in MPPT solar charge regulator. Compared to most regulators on the market, the MPPT offers a far higher yield from solar power for charging your batteries.

Home comforts

The Mass Combi Ultra and Mass Combi Pro Inverter/Chargers feature separate AC outputs. One is permanently powered to supply critical loads such as refrigerators and audio systems. The other output is for non-preferential loads including water heaters that can be switched off automatically at any desired setting, always to the benefit of the critical loads.

Optimal battery usage

Based on Mastervolt's many years of experience, the Mass Combi Ultra and Mass Combi Pro Inverter/Chargers feature a number of characteristics that ensure you get the most from your batteries in terms of maximum power and lifespan. Key examples include the pure, interference-free DC voltage that prevents unnecessary heating of the batteries and a low 'no load' current that guarantees every Ah is deployed in an optimal way.

Quiet operation

The Mass Combi Ultra and Mass Combi Pro Inverter/Chargers can provide up to 50% of the charging current or inverter capacity without fan cooling. This is perfect for night-time operation; if little power is consumed, the fan stops turning and goes silent. When maximum capacity is required, or the ambient temperature is very high, the Active Optima Cooling concept regulates the fan speed in a linear way, ensuring that it never spins too fast or makes any unnecessary ticking noises.

Mass Combi® Ultra & Mass Combi Pro Inverter/Chargers

Speci





24/3500-100



Mass Combi Ultra

48/3500-50

cifications – 230V	
Cilications - 250V	Mass Combi Ultra
	12/3000-150

	12/3000-150	24/3500-100	48/3500-50
Part #	38013000	38023500	38343500
Specifications Sine Wave Inverter			
Nomimal DC voltage	12V (9.5-16V)	24V (19-32V)	48V (38-62V)
Output voltage	180–260V, adjustable	180–260V, adjustable	180–260V, adjustable
Output waveform	true sine	true sine	true sine
Continuous power at 104°F (40°C), cos phi 1	3000 W	3500 W	3500 W
Surge capability	6000 W	7000 W	7000 W
Parallel configuration For larger systems, an external transfer system is required	yes, up to 10 standard	yes, up to 10 standard	yes, up to 10 standard
3-Phase configuration	yes, up to 3x3	yes, up to 3x3	yes, up to 3x3
Max. efficiency	≥ 90%	≥ 92%	≥ 93%
Energy saving mode consumption	7 W	7 W	7 W
Specifications Battery Charger			
Max. charge current at 104°F (40°C) adjustable	150A at 14.25V	100A at 28.5V	50A at 57V
Secondary charger output voltage	12V	12/24V selectable, 3-step+	12/24V selectable, 3-step+
Secondary charger output current	10A	10A	10A
Battery temperature sensor	yes, included	yes, included	yes, included
Specifications Transfer System			
AC input (generator)	50A (switched)	50A (switched)	50A (switched)
AC input (mains)	30A (switched)	30A (switched)	30A (switched)
AC output 1	67A	67A	67A
AC output 2	50A (switched)	50A (switched)	50A (switched)
Transfer speed	seamless (< 1 ms)	seamless (< 1 ms)	seamless (< 1 ms)
Solar Input DC Specifications	200111000 (11110)		
Input voltage range	25-50V	25-100V	n.a.
Max. PV peak power	500 Wp	500 Wp	n.a.
Max. input current	19A	19A	n.a.
Max. charge current	30A at 14.25V	15A at 28.5V	n.a.
MPP Tracker	full power at 25–50V	full power at 35–80V	n.a.
General Specifications	ruii porrei de 25 501	ian perier desse cer	
Display/read-out	LED display	LED display	LED display
Dimensions, hxwxd	18.6" x 12.5" x 7" 472 x 318 x 178 mm	18.6" x 12.5" x 7" 472 x 318 x 178 mm	18.6" x 12.5" x 7" 472 x 318 x 178 mm
Weight	33.7 lb / 15.3 kg	33.7 lb / 15.3 kg	33.7 lb / 15.3 kg
Approvals	CE, E-mark, ABYC, RMRS	CE, E-mark, ABYC, RMRS	CE, E-mark, ABYC, RMRS
Technical Specifications		, , , , , , , , , , , , , , , , , , , ,	
Charge characteristic	IUoUo, autom	atic 3-step+ for AGM/Gel/MLI/flooded	/traction/spiral
Ground relay	yes, configurable	yes, configurable	yes, configurable
Temperature range (ambient temp.)		F, derating > 104°F (-25°C to 60°C, de	
Cooling	vario fan	vario fan	vario fan
Protection degree	IP23 (vertical mounting)	IP23 (vertical mounting)	IP23 (vertical mounting)
Protections	` '	ture, overload, short circuit, high/low	
MasterBus® compatible	yes	yes	yes
Integrates with Fathom®		with batteries, smart battery manage	·
Options	y es; coaa	The saccenes, smart saccer, manage	
Temperature Sensors 41500500, 6M 41500800, 15M	included option	included option	included option
EasyView 5	option	option	option
77010310	Waterproof system monitor with 'da show the key system information at	aylight readable' color display and intu a glance. There is also a logbook feat is. The home button gives access to fa	uitive multi-language touchscreen to cure for warnings and alarms, along

RJ12 communication / sync cable, available lengths: 3.3', 9.8', 19.7', 32.8' or 49.2'

Mastervolt® USB Interface

77030100



option option option

 $Communication\ port\ between\ MasterBus\ and\ the\ USB\ port\ of\ your\ PC;\ makes\ possible\ reading\ and\ configuration\ of\ your\ MasterBus\ systemon\ the\ PC\ when\ combined\ with\ MasterAdjust\ software\ (free\ to\ download).$

High quality communication cable fitted with RJ12 type modular plugs, suitable for connecting a remote control panel Also suitable as a sync cable for Mass Combi Ultra or Mass Combi Pro Inverter/Chargers models, both in parallel or 3-phase configurations.





Mass Combi Pro
12/3000-150

20502500
24/3500-100
Mass Combi Pr

12/3000-150	Mass Combi Pro 24/3500-100
38513000	38523500
12V (9.5-16V)	24V (19-32V)
180–260V, adjustable	180–260V, adjustable
true sine	true sine
3000 W	3500 W
6000 W	7000 W
yes, up to 10 standard	yes, up to 10 standard
yes, up to 3x3	yes, up to 3x3
≥ 90%	≥ 92%
7 W	7 W
150A at 14.25V	100A at 28.5V
n.a.	n.a.
n.a.	n.a.
yes, included	yes, included
50A (switched)	50A (switched)
30A (switched)	30A (switched)
67A	67A
50A (switched)	50A (switched)
seamless (< 1 ms)	seamless (< 1 ms)
n.a.	n.a.
LED display	LED display

LED display	LED display
18.6" x 12.5" x 7" 472 x 318 x 178 mm	18.6" x 12.5" x 7" 472 x 318 x 178 mm
33.7 lb / 15.3 kg	33.7 lb / 15.3 kg
CE, E-mark, ABYC	CE, E-mark, ABYC

IUoUo, automatic 3-step+ for AGM/Gel	/MLI/flooded/traction/spiral
yes, configurable	yes, configurable

-13°F to 140°F, derating > 104°F (-25°C to 60°C, derating > 40°C) vario fan vario fan

IP23 (vertical mounting) IP23 (vertical mounting) over-temperature, overload, short circuit, high/low battery voltage

yes, in combination with batteries, smart battery management and display $\ensuremath{\mathsf{UI}}$

included option	included option
option	option
option	option
option	option



CombiMaster® Inverter/Chargers NEW

The CombiMaster inverter/charger delivers pure sine wave inverter power and multi-chemistry battery charging plus the intelligent new design communicates seamlessly with NMEA 2000®, CZone and MasterBus® networks, and integrates with the Fathom® e-power system.

Designed with the customer in mind and using the latest technology, the CombiMaster is all about user-friendliness and reliability. But don't let that friendly appearance misguide you: the powerful CombiMaster range drives even the most complex and heavy loads with ease!

With the CombiMaster, power dips and failures belong to the past. The automatic AC transfer system switches seamlessly between generator or mains and inverter output, ensuring a constant power supply. Its Power Assist function prevents tripping of the mains fuse in case you're connected to a weak land line or small generator.

The CombiMaster delivers unmatched performance at an unprecedented price. As you would expect from Mastervolt®, the CombiMaster is completed with MasterBus, CZone and NMEA 2000® compatible communication and Fathom integration, allowing for a broad range of monitoring and system integration options.





CombiMaster Features

- · Dependable quality for leisure and semiprofessional applications
- Most compact and lightweight inverter/charger in its class
- Reliable, cost effective and hum-free
- High power rating and >200% peak power to start even the heaviest loads
- Pure sine technology prevents malfunctions and damage to electronic equipment
- Low-loss HF technology allows for longer operation from your batteries
- Powerful and Intelligent 3-step+ battery charger for fast and safe charging
- · Fast, automatic switching between mains and inverter mode
- Power assist prevents blown mains fuses.

- · Generator compatible
- · Quick installation and heavy duty connections
- UL, CE and E-mark certified
- With a DC input voltage range from 10–18V DC and flat battery support at 25% under 10V. The new CombiMaster ensures fast, safe, and efficient charging of your Flooded, AGM, Gel, Li-ion batteries.
- Wide AC input range (90-140V AC) insures functionality of AC devices even with adverse input power conditions
- The new 24V models in 3500W & 4500W and 48V 5000W unit can create parallel and series stacked systems to power up to 35kW and be used to power split phase loads.

Remote Control and Monitoring Options

- MasterBus compatible via SmartRemote or EasyView 5 displays.
- CZone compatible via Touch 5 or Touch 10.
- NMEA 2000® compatible via 3rd Party MFD.





CombiMaster® EXPANDED OFFERING Inverter/Chargers

Specifications – 120V










	CombiMaster 12/1500-60	CombiMaster 12/2000-100	CombiMaster 12/3000-160	CombiMaster 12/3500-200	
Part #	35511500	35512000	35513000	35513500	
General Specifications Sine Wave Inverter					
Nominal DC voltage	12V (10.2-16V)	12V (10.2-16V)	12V (10.2-16V)	12V (10.2-16V)	
Continuous power at 104°F (40°C)	1500 W	2000 W	3000 W	3500 W	
Peak power (30 sec)	2250 W	3000 W	4500 W	5250 W	
Surge power (5 sec)	3000 W	4000 W	6000 W	7000 W	
Parallel Stacking	no	no	no	yes, up to 3	
Synchronize with mains/generator	yes	yes	yes	yes	
Output voltage	120V (50/60 Hz	z, configurable)	120V (50/60 Hz	z, configurable)	
Output waveform	pure sine	pure sine	pure sine	pure sine	
Max. efficiency	93%	92%	90%	93%	
Max. ripple on DC (battery at full load)	<15%	<15%	<15%	<15%	
Battery no-load power consumption	≤30 W	≤30 W	≤30 W	≤30 W	
Energy saving mode consumption	≤10 W	≤10 W	≤10 W	≤20W	
General Specifications Battery Charger					
Input voltage range	90-140V	90-140V	90-140V	90-140V	
Max. input current	9	16.5	25	32	
Max. charge current at 104°F (40°C)	60A@14.25V	100A@14.25V	160A@14.25V	200A@14.25V	
Battery temperature sensor	yes, included	yes, included	yes, included	yes, included	
Battery voltage sense	yes, automatic	yes, automatic	yes, automatic	yes, automatic	
Flat battery support (minimum charging)	yes, below 10V	· · · · · · · · · · · · · · · · · · ·	yes, below 10V	· · · · · · · · · · · · · · · · · · ·	
Continuous Battery Charge Output	60A DC	100A DC	160A DC	200A DC	
Temp Range	-13°F to 140°F	(-25°C to 60°C)	-13°F to 140°F	(-25°C to 60°C)	
Specifications Transfer System					
AC input	30A (switched)	30A (switched)	30A (switched)	50A (switched)	
AC output	40A	40A	40A	85A	
AC input fuse	30A	30A	30A	50A	
General Specifications	150 !: 1	150 11 1	150 11 1	150 !: 1	
Display/read-out Dimensions, hxwxd	LED display 14.6" × 11.2" × 6.1"	LED display 17.6" × 11.2" × 6.1"	LED display 17.6" × 11.2" × 6.1"	LED display 22" × 14.2" × 6.7"	
	371 × 284 × 155 mm	448 × 284 × 155 mm	448 × 284 × 155 mm	559 × 361 × 170 mm	
Weight	15.2 lb / 6.9 kg	20.5 lb/9.3 kg	20.5 lb / 9.3 kg	25 lb/11.3 kg	
Approvals	ABYC A31, UL1236, UL17	41, SAEJ11/1, FCC class B	ABYC A31, UL1236, UL17	41, SAEJ11/1, FCC class B	
Technical Specifications				1.1	
Charge characteristic		· · · · · · · · · · · · · · · · · · ·	ded, Gel/AGM, Lithium configu		
Recommended battery capacity		Ah (based differ for other types)	~ 200–1000 on gel batteries, may		
Ground relay	yes, selectable	yes, selectable	yes, selectable	Yes, always on	
Temperature range (ambient temp.)	-	13°F to 140°F, derating 104°F	(-25°C to 60°C, derating > 40°C	:)	
Cooling	Forced Air / Fan 80mm	Forced Air / Fan 80mm	Forced Air / Fan 80mm	Forced Air 92 or 120mm	
Protection degree	IP23	IP23	IP23	IP23	
Humidity protection	cc	onformal coating, max. 95% re	elative humidity, non condensir	ng	
Protections	OVE	er temperature, overload, sho	rt circuit, high/low battery volt	age	
Power Assist	yes	yes	yes	yes	
Power Sharing	yes	yes	yes	yes	
Communciation	Mass	terBus, NMEA 2000® CZone® (config file needed for NMEA 20	000®)	

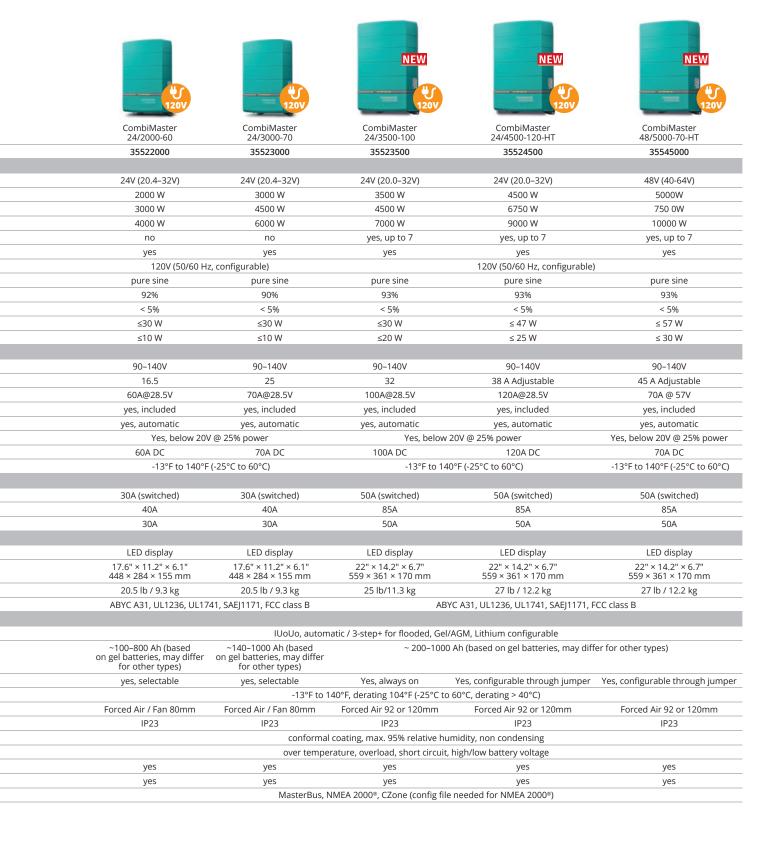

CombiMaster® Inverter/Chargers

Specifications – 230V

6502200600

6502200700

6502200800







	CombiMaster 12/2000-60	CombiMaster 12/3000-100	CombiMaster 24/2000-40	CombiMaster 24/3000-60
Part #	35012000	35013000	35022000	35023000
General Specifications Sine Wave Inv		33013000	33022000	33023000
•			- 11/12-1 - 2-11	- 11 / (1 1)
Nominal DC voltage	12V (10.2–16V)	12V (10.2–16V)	24V (20.4–32V)	24V (20.4–32V)
Continuous power at 104°F (40°C)	2000V A / 1600 W	3000V A / 2600 W	2000V A / 1600 W	3000V A / 2600 W
Peak power (30 sec)	3000V A / 2400 W	4500V A / 3900 W	3000V A / 2400 W	4500V A / 3900 W
Surge power (5 sec)	4000V A / 3200 W	6000V A / 5200 W	4000V A / 3200 W	6000V A / 5200 W
Synchronize with mains/generator	yes	yes	yes	yes
Output voltage	230V 50/60 Hz, configurable	230V 50/60 Hz, configurable	230V 50/60 Hz, configurable	230V 50/60 Hz, configurable
Output waveform	true sine	true sine	true sine	true sine
Max. efficiency	≥ 93%	≥ 93%	≥ 93%	≥ 93%
Max. ripple on DC (battery at full load)	< 15%	< 15%	< 15%	< 15%
Battery no-load power consumption	20 W on mode / < 1 mA off mode	30 W on mode / < 1 mA off mode	20 W on mode / < 1 mA off mode	30 W on mode / < 1 mA off mode
Energy saving mode consumption	10 W	10 W	10 W	10 W
General Specifications Battery Charg	ger			
Input voltage range	90–280V power derating below 170V	90–280V power derating below 170V	90–280V power derating below 170V	90–280V power derating below 170V
Max. input current	6A (adjustable)	10A (adjustable)	8A	13A
Max. charge current at 104 °F (40 °C)	60A at 14.25V, configurable	100A at 14.25V, configurable	40A at 28.5V, configurable	60A at 28.5V, configurable
Battery temperature sensor	yes, included	yes, included	yes, included	yes, included
Battery voltage sense	automatic compensation	automatic compensation	automatic compensation	automatic compensation
Specifications Transfer System				
AC input	25A (switched)	25A (switched)	25A (switched)	25A (switched)
AC output	33A	33A	33A	38A
AC input fuse	yes	yes	yes	yes
Transfer speed	10 ms for narrow input range, 20 ms for wide range, configurable		10 ms for narrow input range, 20 ms for wide range, configurable	
Transfer voltage range		narrow input range (170-2	280V) wide range (90-280V)	
Transfer frequency range	40-65 Hz	40-65 Hz	40-65 Hz	40-65 Hz
General Specifications				
Display/read-out	LED display	LED display	LED display	LED display
Dimensions, hxwxd	14.6" × 11.2" × 6.1" 371 × 284 × 155 mm	17.6" × 11.2" × 6.1" 448 × 284 × 155 mm	14.6" × 11.2" × 6.1" 371 × 284 × 155 mm	17.6" × 11.2" × 6.1" 448 × 284 × 155 mm
Weight	15.2 lb / 6.9 kg	20.5 lb / 9.3 kg	15.2 lb / 6.9 kg	20.5 lb / 9.3 kg
Approvals	CE, E-mark, AZ/NZS	CE, E-mark, AZ/NZS	CE, E-mark, AZ/NZS	CE, E-mark, AZ/NZS
Technical Specifications				
Charge characteristic	IUoUo, automatic / 3-step+ for flooded, Gel/AGM and MLI, configurable		IUoUo, automatic / 3-step+ for flooded, Gel/AGM and MLI, configurable	
Recommended battery capacity	~100–800 Ah (based on gel batteries, may differ for other types)	~200–1000 Ah (based on gel batteries, may differ for other types)	~100–800 Ah (based on gel batteries, may differ for other types)	~140–1000 Ah (based on gel batteries, may differ for other types)
Ground relay	yes, configurable by mea	• • • • • • • • • • • • • • • • • • • •		ans of mechanical jumper
Temperature range (ambient temp.)	,,		(-25°C to 60°C, derating > 40°C)	
Cooling	vario fan	vario fan	vario fan	vario fan
Protection degree	IP23 (vertical mounting)	IP23 (vertical mounting)	IP23 (vertical mounting)	IP23 (vertical mounting)
Safety class	IEC protection class I	IEC protection class I	IEC protection class I	IEC protection class I
Humidity protection	conformal coar	ting, max. 95%	conformal coa	
Protections	over temperat short circuit, high/l	ure, overload,	over tempera	ture, overload, low battery voltage
Power Assist	yes, will support AC input	, ,		it power from the battery
Power Sharing	yes, allows you to selec		yes, allows you to select AC Input fuse setting	
Communciation	MasterBus	s & CZone	MasterBus & CZone	
Integrates with Fathom	yes, in combination with batteries, smart battery management and display UI		yes, in combination with batteries, smart battery management and display UI	
New available accessories (3500 W/ 4	1500 W & 5000 W models cally			
6502200010	1500 W & 5000 W models only)	Maston volt® CombiNastor	Current Charing cable 1 mts	
			Current Sharing cable 1 mtr	
6502200030			Current Sharing cable 3 mtr	
6502200060			Current Sharing cable 6 mtr	
6502200410			Communication cable 1 mtr	
6502200430			Communication cable 3 mtr	
6502200460			Communication cable 6 mtr	
6502200500			train Relief Bracket	
6502200600		(ompiMactor (abol k	it for 2 units in Parallel	

CombiMaster Cabel Kit for 2 units in Parallel

CombiMaster Cabel Kit for 3rd unit in Parallel

CombiMaster Cabel Kit for Split phase operation

PowerCombi Inverter/Chargers Simple. Independent. Flexible

Introducing the PowerCombi Inverter/Charger from Mastervolt. PowerCombi is a pure sine wave inverter/charger offering grid quality AC power and battery charging in one low profile design. Designed to be an independent inverter/charger, yet can easily be integrated into a CZone®/MasterBus® network (with additional interface). With a built in transfer switch, 2x surge for 3s and on site dipswitch programming the PowerCombi offers simple installation with multiple operating modes, and can charge various battery chemistries—including a custom profile for use with Li-ion. Full certifications make it perfect for use in RV's, boats, and specialty vehicles. Add a battery temperature sensor (BTS), remote display and a communication interface for custom applications.







12V/1200W-50A
26211200

PowerCombi

	12V/1200W-50A	12V/2000W-100A	
Part #	36211200	36212000	
Part # Kit (Includes Remote, BTS)	36211201	36212001	
Specifications			
Continuous Power Rating 77°F (25°C)	1200 W	2000 W	
Continuous Power Rating 104°F (40°C)	1200 W	2000 W	
Surge	2400 W (3s)	4000 W (3s)	
AC Voltage/Frequency	120V-50/60Hz selectable HF - Pure	120V-50/60Hz selectable HF - Pure	
Idle Power Full	25 W	36 W	
Inverter Efficiency	89%	89%	
DC Input Voltage Range	10.5-16.5V	10.5-16.5V	
Nominal DC Voltage	12V	12V	
Flat battery support (minimum charging)	NO (6V)	NO (6V)	
Continuous Battery Charge Output	50A DC	100A DC	
DC Output (second)	20A DC	20A DC	
Battery Types	Flooded, Gel, AGM, custom	Flooded, Gel, AGM, custom	
Transfer Switch (Speed)	30A (10ms)	30A (10ms)	
Dimensions, hxwxd	15.19" x 9.88" x 4.57" (386 x 251 x 116 mm)	17.83" x 9.88" x 4.57" (453 x 251 x 116 mm)	
Weight	10.0 lb / 4.55 kg	13.5 lb / 6 kg	
Approvals	UL458 & Supplement SA/CSA C22.2, UL 1741 no. 107.1-01KKK-A-1822F		
Technical Specifications			
Temperature range (ambient temp.)	4°F to 140°F (-20°C to 60°C)	4°F to 140°F (-20°C to 60°C)	
Communications	MasterBus compatible via M	asterBus Interface 77032900	
Options			
Temperature Sensor 41500700	recommended	recommended	
PowerCombi Remote Control	option	option	
77010700	Control and monitor your PowerCombi inverter / charger via this easy to use remote monitor. The LCD display is used for setting up the inverter/charger operation, as well as viewing current status or fault messages.		
MasterBus PowerCombi Interface	option	option	
77032900	By adding the MasterBus PowerCombi Interface to your installation, you can control the PowerCombi via the MasterBus communication network. A RJ45 communication cable i included in the delivery.		



Sine Wave Inverters: Enjoy the comforts of home

Your AC installation offers you a wealth of benefits by making the use of any domestic appliance possible, from microwave oven to hair dryer, DVD player to power tools. A Mastervolt® inverter allows you to easily convert the voltage of your 12V or 24V battery to 230V/50Hz or 120V/60Hz, so you enjoy all the comforts of home wherever you choose to go.

Mastervolt offers a complete range of inverters from 300 watt to 40 kwatt, for 230V/50Hz as well as 120V/60Hz.

Completely independent

Grid power regularly fluctuates and can cause your lights to flicker. Sometimes it may even drop below 180 volts causing some devices to stop functioning. The Mastervolt sine wave inverter ensures a perfect AC voltage, and makes power problems a thing of the past. The pure sine wave technology also helps protect your equipment against failures, humming or interference on monitors or TV's and ensures a longer lifespan.

Which Mastervolt inverter fits your needs?

Mass Sine Ultra Inverter

This model is intended for professional applications with high power demands, and extends the Mass Sine series. With 4 kW AC power, the Mass Sine Ultra Inverter meets the highest energy requirements.

The latest technology increases the efficiency and enables multiple units to work in parallel and 3-phase configuration.

Mass Sine Inverter

These high quality sine wave inverters have proven themselves in the most extreme conditions for over twenty-five years. Although the dimensions and connections of the various models have remained the same, the technology has evolved, resulting in a fast, efficient, one-on-one replacement with minimal downtime.

AC Master

These affordable sine wave inverters convert 12V or 24V battery voltage into reliable grid power, making it ideal for recreational and semi-professional applications.





No humming with HF technology

Our use of high-frequency switch technology means you can say goodbye to humming transformers and hello to efficiency. Mastervolt inverters are also small and lightweight to ensure easy installation.



High peak power during start up

Mastervolt sine wave inverters can deliver high peak power (up to 200%) to equipment that requires extra current for a short period of time while powering up.



Efficient use of batteries

A high efficiency when inverting and an automatic economy mode when there is no consumption gives you longer use of your batteries.



Pure sine wave

Mastervolt inverters generate a sine wave shaped output current similar or even better than that of the public grid and perfectly suited for powering sensitive equipment.



Simple and safe to connect

The inverters feature robust connection technology, internal in the larger models and a plug & play socket with cable for the smaller models.





MasterBus® compatible

Every Mass Sine (Ultra) inverter can be easily connected to a MasterBus network with only one cable and one connection. You can also choose central, local or remote monitoring, configuration and control of your system.

Mass Sine Ultra and Mass Sine Inverters:

For the toughest tasks



Even under the most extreme conditions the products from the Mass series operate faultlessly, giving you round-the-clock output when necessary. With an MTBF of 180,000 hours at full capacity and 24/7 use, the Mass products are ideal for the toughest tasks and any situation that requires a reliable power supply.



Optimal flexibility in system design

Choosing an independent sine wave inverter allows you complete freedom of choice of battery charging equipment. You can freely adapt the rating of these chargers, depending on the desired charge time. In case you want to use renewable energy sources, you may want to choose an MPPT solar charge regulator.

High efficiency

The high efficiency and automatic economy mode is designed to allow digital clocks to work properly and ensure you many more hours of operation from your batteries. The application of high-frequency technology prevents any annoying humming and zooming sounds, while the high peak capacity ensures that the high inrush current required for electrical tools, for example, is seamlessly produced.

Mass Sine Ultra and Mass Sine Features

- For heavy duty work in professional and semi-professional applications
- Full capacity at temperatures up to 104°F (40°C)
- · Pure sine wave output prevents failures and damage to connected sensitive equipment
- High peak capacity for the seamless switching on of complex and heavy loads
- Dynamic, battery-specific input current for an optimal use of every type of battery (Mass Sine Ultra Inverter)
- Parallel configuration of up to ten devices for a capacity up to 40 kW (Mass Sine Ultra Inverter)
- 3-Phase configuration for a capacity up to 36 kW (Mass Sine Ultra Inverter)
- · Integrated MasterBus® (Mass Sine Ultra Inverter) or MasterBus compatible (Mass Sine Inverter)
- · Suitable for mobile applications
- · Professional connections
- · Automatic, reliable and safe operation
- · Optional: Masterswitch/Systemswitch for automatic selection of the desired energy source

Mass Sine Ultra

With an AC capacity of 4000W in one unit, the Mass Sine Ultra Inverter can satisfy even the greatest energy demands. As ten units can be switched in parallel or 3x3 in a three-stage configuration, the Mass Sine Ultra Inverter can supply a capacity of up to 40 kW. The inverter provides full power at 104°F (40°C) and works smoothly even in extreme conditions such as engine rooms and technical spaces. Like all Mass products, the inverter is supplied in a compact and robust casing. This inverter is the best choice if you are looking for autonomous AC capacity of over 3 kW.

Latest technology

The extremely efficient power electronics save volume and weight with minimal sound levels and a very low ripple voltage which extends the lifespan of your batteries. At the same time, digital technology prevents any annoying flickering and voltage fluctuations.

Make the most of your batteries

The Mass Sine Ultra Inverter is equipped with a dynamic battery voltage window. Taking into account the type of battery and current, this function ensures the inverter can supply AC longer without overtaxing the batteries.

Mass Sine

Mastervolt®'s Mass Sine inverters have been proving their value in the most extreme conditions for over 25 years.

Clear indicators

The Mass Sine Inverter features easy controls on the device itself. As inverters are often built in, we also supply an effective remote control panel, the C4-RI. In addition, the Mass can be controlled via its intuitive display, the EasyView 5, thanks to the integration of MasterBus communication using a MasterBus Inverter Interface or AC Power Analyser.

Easy and safe connections

The Mass Sine inverters provide robust and professional connections for fast and safe installation.

Mass Sine and Mass Sine Ultra Inverters Specifications – 230V







			** **		
	Mass Sine 12/2000*	Mass Sine 24/800*	Mass Sine 24/1500*		
Part # 230V	24012000	24020800	24021500		
General Specifications					
Nominal battery voltage	12V	24V	24V		
Recommended battery capacity	>200 Ah	>50 Ah	>150 Ah		
Output voltage (± 5%)	230V – 50Hz (± 0 .01Hz)	230V - 50Hz (± 0 .01Hz)	230V – 50Hz (± 0 .01Hz)		
P30 power at 104°F (40°C), cos phi 1	2000 W	800 W	1500 W		
Continuous power at 104°F (40°C), cos phi 1	1800 W	650 W	1200 W		
Peak load	4000 W	1600 W	2900 W		
Output waveform	true sine	true sine	true sine		
Efficiency	92%	92%	92%		
Display/read-out	LED display	LED display	LED display		
Parallel configuration	no	no	no		
3-Phase configuration	no	no	no		
Dimensions, HxWxD	16.5" x 12.5" x 5.1" 420 x 318 x 130 mm	12.8" x 8.7" x 4.4" 325 x 220 x 111 mm	13.4" x 10.3" x 5.1" 340 x 261 x 130 mm		
Weight	22.3 lb / 10.1 kg	8.6 lb / 3.9 kg	13.7 lb / 6.2 kg		
Approvals	CE, E-mark, ABYC A-31, RRR	CE, E-mark, ABYC A-31	CE, E-mark, ABYC A-31		
Technical Specification					
Technology	HF switch mode	HF switch mode	HF switch mode		
Max. ripple on DC (battery)	5% RMS	5% RMS	5% RMS		
Input current (nominal load)	183A	36A	68A		
No load power consumption: • 'on' mode (230V) • energy saving mode	480 mA – 6 W 50 mA – 0.6 W	240 mA – 5.6 W 35 mA – 0.8 W	200 mA – 5 W 25 mA – 0.6 W		
Minimal DC fuse (slow blow)**	250A	63A	100A		
Minimal cable size	70 mm ²	16 mm²	25 mm²		
Harmonic distortion typical	<5%	<5%	<5%		
Cos Phi	all power factors allowed	all power factors allowed	all power factors allowed		
Temperature range (ambient temp.)		5°F, >104°F derating (-25°C-80°C >40°	<u> </u>		
Cooling	natural/forced	natural/forced	natural/forced		
		Systemswitch can be connected to all			
Transfer System Protestion degree	IP23	IP23	IP23		
Protection degree			•		
Protections MasterBus® compatible	with MB Inverter Interface	ture, over load, short circuit, high/low with MB Inverter Interface	with MB Inverter Interface		
	or AC Power Analyser	or AC Power Analyser	or AC Power Analyser		
AC connection	internal	internal	internal		
Options					
EasyView 5 77010310	option option In combination with MasterBus Inverter Interface. Waterproof system monitor with 'daylight readable' color display and intuitive multi-language touchscreen to show the key system information at a glance. There is also a logbook feature for warnings and alarms, along with a buzzer and alarm notifications. The home button gives access to favorite pages.				
Mastervolt® USB Interface	option	option	option		
77030100	of your PC; makes possible reading	In combination with MasterBus Inverter Interface. Communication port between MasterBus and the USB port of your PC; makes possible reading and configuration of your MasterBus system on the PC when combined with MasterView System software (free to download).			
MasterBus Inverter Interface 77030700	option	option n a MasterBus network in a MasterBu:	option s network		
AC Power Analyser	option	option	option		
77031200	'	option n a MasterBus network and measures	•		

^{*} Also available in 60 Hz: 2000W model: Part # 24112000 800 W model: Part # 24121500 1500 W model: Part # 24121500 5000 W model: Part # 24195100

^{**} DC fuse depends on the cable size.







230V	100 PM	230V
Mass Sine 24/2500*	Mass Sine Ultra 24/4000	Mass Sine 24/5000*
24022500	26024000	24095100
24V	24V	24V
>200 Ah	>350 Ah	>400 Ah
230V – 50Hz (± 0 .01Hz)	230V (± 2%) – 50/60 Hz selectable (± 0.005%)	230V (± 2%) – 50/60 Hz selectable
2500 W	_	5000 W
2000 W	4000 W	4000 W
5000 W	7000 W	9000 W
true sine	true sine	true sine
92%	≥ 92%	92%
LED display	LED display	LED display
no	yes, up to 10 units	no
no	yes, up to 3x3	no
16.5" x 12.5" x 5.1" 420 x 318 x 130 mm	18.6" x 12.5" x 6.9" 472 x 318 x 178 mm	18.5" x 12.4" x 10" 470 x 315 x 254 mm
22.3 lb / 10.1 kg	33.1 lb / 15 kg	41.9 lb / 19 kg
CE, E-mark, ABYC A-31	CE, E-mark, ABYC A-31	CE, E-mark, ABYC A-31
HF switch mode	V6 HF switch mode	HF switch mode
5% RMS	5% RMS	5% RMS
115A	200A	230A
250 mA – 6 W 25 mA – 0.6 W	660 mA – 16 W 300 mA – 7 W	250 mA – 6 W 50 mA – 1.2 W
160A	250A	1x 250A or 2x 125A
50 mm ²	70 mm²	2x 70 mm²
<5%	<1%	<5%
all power factors allowed	all power factors allowed	all power factors allowed
-13°F–176	°F, >104°F derating (-25°C-80°C >40°	C derating)
natural/forced	natural/forced	natural/forced
The Masterswitch/S	Systemswitch can be connected to all	sine wave inverters
IP23	IP23	IP23
over temperate	ure, over load, short circuit, high/low	battery voltage
with MB Inverter Interface or AC Power Analyser	yes	with MB Inverter Interface or AC Power Analyser
internal	internal	internal
option	option	option
option	n.a.	option
option	n.a.	option
option	n.a.	option

The following models are also available in Quick Connect (OEM) version with a WAGO 770-103 connector and 25 cm cable:

- Mass Sine Inverter 12/2000 230V, part # 24021002
- Mass Sine Inverter 12/2000 120V, part # 25012002

AC Master Series Inverters:

Reliable AC power for recreational and semi-professional use



These affordable sine wave inverters convert 12V or 24V battery voltage into reliable grid power, making them ideal for recreational and semi-professional applications.

The AC Master series is easy to install and delivers full output, even under the most demanding conditions. The pure sine wave technology provides an outstanding power quality, ensuring the correct functioning of sensitive equipment. The usage of high frequency switching technology eliminates

The usage of high frequency switching technology eliminates any annoying humming and buzzing sounds.

Representing complete value for money, these ruggedly built inverters provide essential home comforts when you're far from the nearest grid connection.

Applications

Both recreational and semi-professional use, where grid power varies or is unavailable. Applications include lighting, appliances, electric cooking and power tools. For (mobile) applications in your home, office or service vehicle, or during your holidays.

















AC Master Series Features

- Pure sine wave technology protects sensitive equipment
- Delivers full output at high peak power under the most demanding conditions
- Automatic power saving system for extended runtime
- Compact and lightweight design, saving valuable installation time
- Reliable and safe operation; protected against over-temperature, overload, short circuit, high or low battery voltage
- · Variable speed fan for quiet operation at low power
- Optional remote control for instant switch off of the inverter and all connected equipment (not available for the 300 and 500 W models).
- Convenient plug connection for all models, 2500/3500 Watt models also hard wired.

In addition, the 2500/3500 Watt models offer:

- Combine two (2) up to 15 units to obtain high power or 3-phase systems
- Integrated transfer system, switches automatically between AC power sources



AC Master Inverters Specifications – 12V

28










	AC Master 12/700 (120V)	AC Master 12/2000 (120V)	AC Master 12/300	AC Master 12/500	
Part#	28510700	28512000	n.a.	n.a.	
Part # (with UK plug)	n.a.	n.a.	n.a.	n.a.	
Part # (with NZ/AU plug)	n.a.	n.a.	n.a.	n.a.	
Part # (with IEC outlet)	n.a.	n.a.	28010302	28010502	
General Specifications					
Output voltage	100/110/115/120 V —	- 50/60 Hz (selectable)	230V – 50 Hz (± 0.1%)	230V - 50 Hz (± 0.1%)	
Output waveform	true sine	true sine	true sine	true sine	
Nominal battery voltage	12V	12V	12V	12V	
Recommended battery capacity	≥ 100 Ah	≥ 200 Ah	≥ 60 Ah	≥ 100 Ah	
Continuous power at 77°F (25°C) , cos phi 1	700 W	2000 W	300 W	500 W	
Continuous power at 104°F (40°C), cos phi 1	700 W	2000 W	250 W	400 W	
Peak load	< 810 W (1 min.) < 1230 W (1 sec.)	< 2300 W (1 min.) < 3500 W (1 sec.)	600 W	800 W	
AC connection	North American socket with GFCI	North American socket with GFCI	universal	universal	
Efficiency	91 %	92%	90%	90%	
Parallel configuration	n.a.	n.a.	n.a.	n.a.	
3-Phase configuration	n.a.	n.a.	n.a.	n.a.	
Display/read-out	LED indication: battery v	voltage, load level, status	LED display	LED display	
Dimensions, hxwxd	7.9" x 13" x 3.3" 200 x 330 x 83 mm	9.8" x 17.4" x 3.3" 248 x 443 x 83 mm	8.3" x 5.1" x 2.4" 210 x 130 x 60 mm	8.3" x 5.1" x 2.4" 210 x 130 x 60 mm	
Weight	6 lb / 2.7 kg	11.5 lb / 5.2 kg	2.55 lb / 1.16 kg	2.69 lb / 1.22 kg	
Alarms	potential free alarm contact	potential free alarm contact	4 alarm modes	4 alarm modes	
Approvals	safety: UL 458, EMC: FCC class B	safety: UL 458, EMC: FCC class B	CE, E-mark, ABYC A-31	CE, E-mark, ABYC A-31	
Technical specifications					
Technology	high frequency, input	& output fully isolated	high frequency, input	& output fully isolated	
Input current (nominal load)	70A	200 A	22.5A	37.5A	
No-load power consumption (energy saving mode)	< 0.1A	< 0.1 A	0.33A – 4 W	0.33A – 4 W	
Minimal DC fuse (slow blow)	100A	250 A	2x 40A	2x 40A	
Minimal cable size	25 mm ²	70 mm ²	1.5 meter DC cable d	lelivered as standard	
Harmonic distortion typical	< 5%	< 3 %	< 6%	< 6%	
Cos phi	all power fac	ctors allowed	all power fac	tors allowed	
Transfer system	n.a.	n.a.	n.a.	n.a.	
Temperature range (ambient temp.)	-4°F to 14	10°F, derating power > 104°F	(-20°C to 60°C, derating pow	er > 40°C)	
Protection degree		, 01	IP23, vertical v	· · · · · · · · · · · · · · · · · · ·	
Protections	over-temperature, o	IP21, horizontal wall mounting over-temperature, overload, short circuit, high/low voltage, reverse polarity (fuse)		verload, short circuit, ttery voltage	
Cooling	temperature and load controlled fan		natural/forced	natural/forced	
MasterBus® compatible	yes, using a MasterBu	us AC Master Interface 77032700	no	no	
Options					
AC Master Remote Control* 70405080	option	option	n.a.	n.a.	
MasterBus AC Master Interface Integrates the AC Master inverter in a MasterBus network	option	option	n.a.	n.a.	

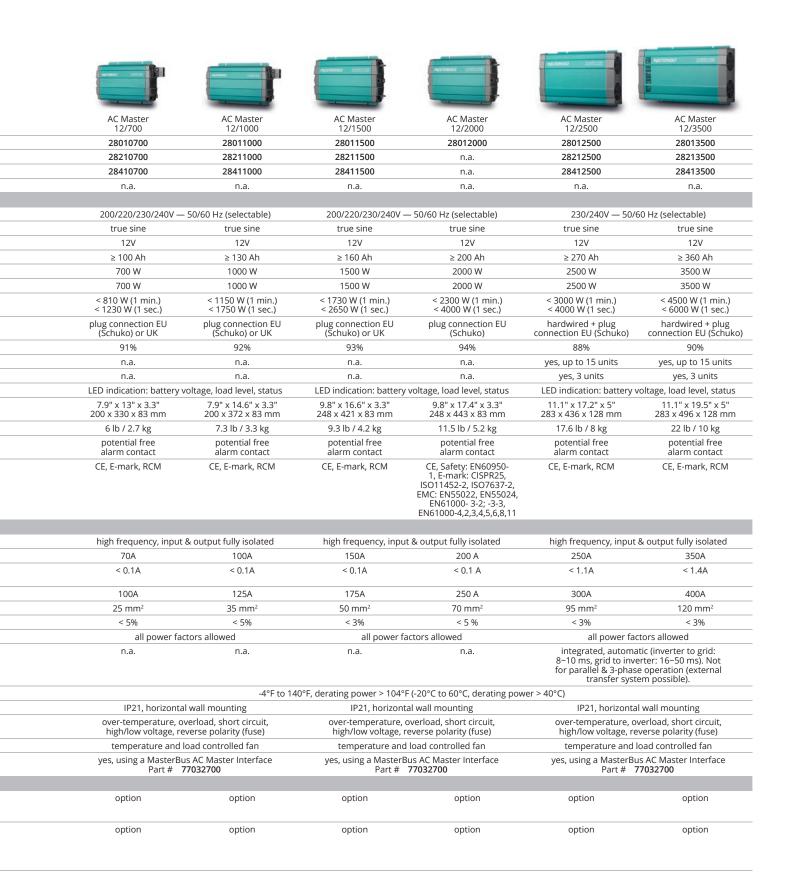

AC Master Inverters Specifications - 24V

30











	1200	1200	2300	2300	
	AC Master 24/700 (120V)	AC Master 24/2000 (120V)	AC Master 24/300	AC Master 24/500	
Part #	28520700	28522000	28020300	28020500	
Part # (with UK plug)	n.a.	n.a.	n.a.	n.a.	
Part # (with NZ/AU plug)	n.a.	n.a.	n.a.	n.a.	
Part # (with IEC outlet)	n.a.	n.a.	28020302	28020502	
General Specifications					
Output voltage	100/110/115/120 V —	- 50/60 Hz (selectable)	230V - 50 Hz (± 0.1%)	230V - 50 Hz (± 0.1%)	
Output waveform	true sine	true sine	true sine	true sine	
Nominal battery voltage	24V	24V	24V	24V	
Recommended battery capacity	≥ 50 Ah	≥ 110 Ah	≥ 30 Ah	≥ 50 Ah	
Continuous power at 77°F (25°C), cos phi 1	700 W	2000 W	300 W	500 W	
Continuous power at 104°F (40°C), cos phi 1	700 W	2000 W	250 W	400 W	
Peak load	< 810 W (1 min.) < 1230 W (1 sec.)	< 2300 W (1 min.) < 3500 W (1 sec.)	600 W	800 W	
AC connection	North American socket with GFCI	North American socket with GFCI	universal	universal	
Efficiency	93%	93%	91%	91%	
Parallel configuration	n.a.	n.a.	n.a.	n.a.	
3-Phase configuration	n.a.	n.a.	n.a.	n.a.	
Display/read-out	LED indication: battery voltage, status	LED indication: battery voltage, load level, status	LED display	LED display	
Dimensions, hxwxd	7.9" x 13" x 3.3" 200 x 330 x 83 mm	9.8" x 17.4" x 3.3" 248 x 4432 x 83 mm	8.3" x 5.1" x 2.4" 210 x 130 x 60 mm	8.3" x 5.1" x 2.4" 210 x 130 x 60 mm	
Weight	6 lb / 2.7 kg	11.5 lb / 5.2 kg	2.55 lb / 1.16 kg	2.69 lb / 1.22 kg	
Alarms	potential free alarm contact	potential free alarm contact	4 alarm modes	4 alarm modes	
Approvals	safety: UL 458E	MC: FCC class B	CE, E-mark, ABYC A-31	CE, E-mark, ABYC A-31	
Technical Specifications					
Technology	high frequency, input	& output fully isolated	high frequency, input	& output fully isolated	
Input current (nominal load)	35A	100A	11A	19A	
No-load power consumption (energy saving mode)	< 0.06A	< 0.05A	0.16A – 4 W	0.16A – 4 W	
Minimal DC fuse (slow blow)	50A	125A	40A	40A	
Minimal cable size	16 mm ²	35 mm ²	1.5 m DC cable delivered as standard	1.5 m DC cable delivered as standard	
Harmonic distortion typical	< 5%	< 5%	< 6%		
Cos phi	all power fac	ctors allowed	all power fac	tors allowed	
Transfer system	n.a.	n.a.	n.a.	n.a.	
Temperature range (ambient temp.)	-4°F to 1	-4°F to 140°F, derating power > 104°F (-		-20°C to 60°C, derating power > 40°C)	
Protection degree	IP21, horizontal wall mounting		IP23, vertical wall mounting		
riotection degree	over-temperature, overload, short circuit, high/low voltage, reverse polarity (fuse)		over-temperature, overload, short circuit, high/low battery voltage		
Protections	over-temperature, o high/low voltage, re	verload, short circuit, everse polarity (fuse)	over-temperal short circuit, high/	ture, overload, low battery voltage	
	high/low voltage, re	verload, short circuit, everse polarity (fuse) load controlled fan	over-temperat short circuit, high/ natural/forced	ure, overload, low battery voltage natural/forced	
Protections	high/low voltage, re temperature and l yes, using a MasterBu	everse polarity (fuse)	short circuit, high/	low battery voltage	
Protections Cooling	high/low voltage, re temperature and l yes, using a MasterBu	load controlled fan us AC Master Interface	short circuit, high/ natural/forced	low battery voltage natural/forced	
Protections Cooling MasterBus® compatible	high/low voltage, re temperature and l yes, using a MasterBu	load controlled fan us AC Master Interface	short circuit, high/ natural/forced	low battery voltage natural/forced	

^{*}On/off control for the AC Master sine wave inverter with a clear on/off indicator which indicates when the inverter is active. In addition, the AC Master Remote Control makes it possible to turn the inverter on or off automatically by means of a 12-volt input, for example when switching on the onboard AC power or while starting an engine. The AC Master Remote Control comes with 25 ft (8 m) cable.

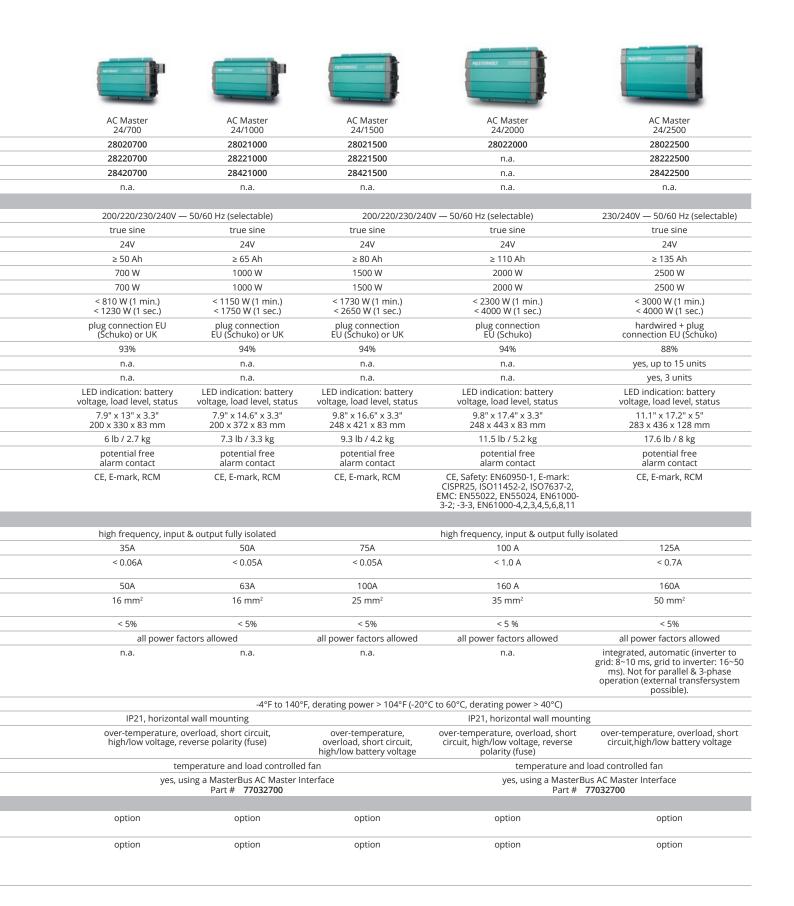

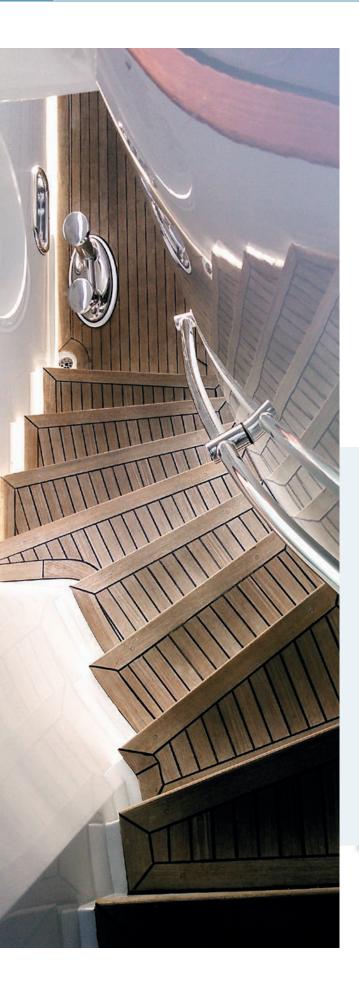

Mastervolt® Battery Chargers: A long life for your battery

We know how important it is to charge your batteries safely, reliably and quickly, even if the power supply is affected by low quality or limited availability. You also value batteries that have a long lifespan while maintaining their capacity. Mastervolt offers you the best possible solution.

The Mastervolt 3-step+ charging method ensures more power and a longer life for your batteries. Our battery chargers integrate multiple functions making sure your batteries are safely and completely charged, even when they are depleted. Fast battery charging is guaranteed by the efficient use of the available grid or generator power (all Mastervolt battery chargers have a power factor correction).

Which battery charger best meets your needs?

Mastervolt offers four ranges of battery chargers:

Mass

For the tougher tasks in professional and semi-professional situations. With its integrated alarm functions and various approvals, the Mass is the best choice for professionals.

ChargeMaster and ChargerMaster Plus series

The ChargeMaster series is suitable for recreational and semi-professional use. It is easy to install and includes a detailed display and easy controls. The ChargeMaster safely charges multiple battery banks at the same time, anywhere in the world.

The ChargeMaster Plus is a new generation of battery chargers that will replace the ChargeMaster in stages. The ChargeMaster Plus combines three battery chargers, a battery isolator and VSR in one compact device. This all-in-one solution can charge all batteries, even when you're on the go. CZone® compatible models available.

EasyCharge and EasyCharge Portable

Easycharge is a fixed-mount waterproof entry level battery charger. For people on the move, the portable version offers a rugged solution that can be used everywhere.



The best battery charger for every application





The ChargeMaster series can charge multiple battery banks at once. The Mass battery charger has one main outlet to optimally charge a battery bank. Both guarantee a long lifespan for your batteries, even with daily and intensive use. Can smoothly charge a combination of multiple battery types, sizes and voltages. The intelligent built-in auxiliary power means that all Mastervolt battery chargers can also charge a completely discharged battery (< 8V).



Charging Lithium Ion Batteries

Mastervolt battery chargers can seamlessly charge Lithium Ion batteries as the Mastervolt battery chargers communicate directly with the Lithium Ion battery via integrated network (or have been adapted to the required charging voltages).













Qualifications

All Mastervolt products comply with one or more of these approvals (see the relevant product specification page for details). If the required qualification is not present, ask your account manager for an addition.

TECH TIP

Choosing the right Battery Charger

Determine:

- How many battery banks do I want to charge?
- The battery charger must have the same voltage as the battery bank.
- Rule of thumb is that 25% of the battery capacity as a charge capacity is sufficient to safely and quickly charge batteries while still supplying power to the consumers (for instance, a battery charger of 50 amps is sufficient for a 200 Ah battery). Increase up to 50% for Mastervolt Gel batteries and 100% for Mastervolt Lithium Ion (LiFePO4) batteries for faster charging.

Mass Series Battery Chargers:

The right choice for demanding conditions



Mass battery chargers are designed for the toughest conditions for professional, semiprofessional and recreational purposes. Even under the most extreme conditions the products from the Mass series operate faultlessly, giving you round-the-clock output when necessary.

The sustainability and technologies that underpin the Mass concept have long been proven in practice. With an MTBF of 180,000 hours at full capacity and 24/7 use, the Mass products are ideal for the toughest tasks and any situation that requires a reliable power supply.



Mass Series Features

- · Designed for the most difficult conditions
- · Lightweight, stainless steel, anodized aluminium casing
- Coating of internal components prevents damage from dampness or condensation to ensure a longer lifespan
- Insensitive to electromagnetic effects from other devices
- Suitable for every type of battery, also charges flat batteries
- · Delivered as standard with temperature sensor
- Full power at temperatures of up to 113°F (45°C)
- Load capacities from 80 to 1000 Ah or more
- Stable and ripple free 24V and 48V power supply, even without batteries
- The Current Control function prevents the breakdown of fuses
- · Parallel switching possible using multiple battery chargers
- Connections in accordance with CE, ABYC A-31 and IEC60945
- Certified by RRR, RMRS (does not apply to 24/75 120V)
- Certified by DNV GL (only 24/25, 24/50, 24/75, 24/75 (120V), 24/100 models)
- Certified by Lloyd (only 24/75, 24/100 models)



MasterBus® compatible

Mastervolt® battery chargers can be easily connected to a MasterBus network with only one cable and one connection. You can also choose central, local or remote monitoring, configuration and control of your system.





Made tough by smart design

The certified Mass battery chargers are very strong, designed to withstand heavy vibrations and shocks. Their premium quality components meet the highest possible specifications, while the smart and extra robust mounting adds to the professional end result.

For professional use: GMDSS

Professional users will benefit from a front display with GMDSS alarm functions. GMDSS stands for Global Maritime Distress and Safety System, an internationally agreed-upon set of safety procedures, types of equipment, and communication protocols that is a requirement for the SOLAS (Safety Of Life At Sea) convention and uses DSC and satellite communication.

This front display is available for:

- Mass 24/25-2 DNV, part # **21709150**
- Mass 24/50-2, part # 21709200
- Mass 24/75, Mass 24/100, Mass 24/100-3ph, part # 21709300



Mass Battery Chargers Specifications – 24V & 48V





Mass	
24/75 DNV-GL (120V

Mass

	Mass 24/75 DNV-GL (120V)	Mass 24/25-2 DNV-GL			
Part #	40120756	40720266	_		
General Specifications					
Nominal output voltage	24V	24V			
Total charge current	75A at 28.5V	25A at 28.5V			
Number of outputs	1	2			
Charge current second output	n.a.	3A			
Recommended battery capacity	150-800 Ah	50–250 Ah			
Nominal input voltage	120V (90-130V) 60/50 Hz	230V (180–265V) 50/60Hz			
Power supply mode	yes	yes			
Display/read-out	LED display	LED display			
Dimensions, HxWxD	16.5" x 12.5" x 5.1" 420 x 318 x 130 mm	14.4" x 8.7" x 4.4" 365 x 220 x 111 mm			
Weight	17 lb / 7.7 kg	7.7 lb / 3.5 kg			
Approvals*	CE, ABYC A-31, DNV-GL	CE, ABYC A-31, DNV-GL, RRR, RMRS			
Technical Specifications					
Charge characteristic**	IUoUo, automatic / 3-step+ for Gel/AGM/flooded/Lithium Ion (LiFePO4)				
Temperature sensor	yes (included)	yes (included)			
DC voltage compensation	yes	yes			
DC consumption	<1 mA	<1 mA			
Full load consumption	2770 W	880 W			
Power factor control	>0.95	>0.95			
Temperature range (ambient temp.)	-13°F to 176°F, derating > 113°F (-25°C to 80°C, derating > 45°C)				
Cooling	vario fan	vario fan			
Protection degree	IP23	IP23			
Protections	over temperature, over load, short circuit, high/low battery voltage				
MasterBus® compatible	yes	yes			
Charger Status Interface (alarm contact)	yes	yes	_		
Options					
EasyView 5	option	option			
77010310	Waterproof system monitor with 'daylight readable' color display and intuitive multi-language touchscreen to show the key system information at a glance. There is also a logbook feature for warnings and alarms, along with a buzzer and alarm notifications. The home button gives access to favorite pages.				
MasterShunt	option	option			
77020115	MasterBus integrated shunt, with detailed information on the status of your batteries for a optimized charging process, incl voltage, current, remaining time and consumption capacity in percentage.				
Mastervolt® USB Interface	option	option			
77030100	Communication port between MasterBus and the USB port of your PC; makes possible reading and configuration of your MasterBus system on the PC when combined with MasterView System software (free to download).				
Temperature Sensors 41500500 , 6M 41500800 , 15M	included option	included option			
GMDSS remote panel	option	option			
70400050	Remote monitoring for Mass battery chargers, with current are displayed on the digital panel.	GMDSS system monitoring functions. Battery voltage and			
Front panel with GMDSS remote panel	n.a.	n.a.			

^{*} Check our website for the certificates per model.
** The charge characteristic can be set to your requirements.

mastervolt.com POWER CONVERSION 37







Mass	
24/50-2 DNV-G	L

Mass
24/75 DNV-GL
40000756

Mass 24/100 DNV-GL

40020506	40020756	40021006
24V	24V	24V
50A at 28.5V	75A at 28.5V	100A at 28.5V
2	1	1
3A	n.a.	n.a.
100–500 Ah	150-750 Ah	200-1000 Ah
230V (180-265V) 50/60Hz	230V (180-265V) 50/60Hz	230V (180-265V) 50/60Hz
yes	yes	yes
LED display	LED display	LED display
13.4"x10.3" x 5.1" 340 x 261 x 130 mm	16.5" x 12.5" x 5.1" 420 x 318 x 130 mm	16.5" x 12.5" x 5.1" 420 x 318 x 130 mm
10.1 lb /4.6 kg	17 lb / 7.7 kg	17 lb / 7.7 kg
CE ADVC A SA DANV CL DDD DAADC	CE 10/C 1 04 (DDD	DARG II I DANGI

CE, ABYC A-31, DNV-GL, RRR, RMRS

CE, ABYC A-31 / RRR, RMRS, Lloyds, DNV GL

IUoUo, a	utomatic / 3-step+ for Gel/AGM/flooded/Lithium Ion ((LiFePO4)
yes (included)	yes (included)	yes (included)
yes	yes	yes
<1 mA	<1 mA	<1 mA
1800 W	2600 W	3500 W
>0.95	>0.95	>0.95
-13°F	to 176°F, derating > 113°F (-25°C to 80°C, derating >	45°C)
vario fan	vario fan	vario fan
IP23	IP23	IP23
over te	mperature, over load, short circuit, high/low battery	voltage
yes	yes	yes
yes	yes	yes
option	option	option

Waterproof system monitor with 'daylight readable' color display and intuitive multi-language touchscreen to show the key system information at a glance. There is also a logbook feature for warnings and alarms, along with a buzzer and alarm notifications. The home button gives access to favorite pages.

option option option

MasterBus integrated shunt, with detailed information on the status of your batteries for a optimized charging process, incl voltage, current, remaining time and consumption capacity in percentage.

option option option

Communication port between MasterBus and the USB port of your PC; makes possible reading and configuration of your MasterBus system on the PC when combined with MasterView System software (free to download).

included option included option option option option option

Remote monitoring for Mass battery chargers, with GMDSS system monitoring functions. Battery voltage and current are displayed on the digital panel.

 option
 option
 option

 21709200
 21709300
 21709300

Mass Battery Chargers Specifications - 24V & 48V








Part # General Specifications Nominal output voltage Total charge current Number of outputs Charge current second output Recommended battery capacity	40020156 24V 15A at 28.5V 2 3A 30–150 Ah 230V (180–265V) 50/60Hz	42720266 24 V 25 A at 28,5 V 2 3A 50-250 Ah	42020506 24 V 50 A at 28,5 V 2 3A			
Nominal output voltage Total charge current Number of outputs Charge current second output	15A at 28.5V 2 3A 30–150 Ah 230V (180–265V)	25 A at 28,5 V 2 3A 50-250 Ah	50 A at 28,5 V 2 3A			
Total charge current Number of outputs Charge current second output	15A at 28.5V 2 3A 30–150 Ah 230V (180–265V)	25 A at 28,5 V 2 3A 50-250 Ah	50 A at 28,5 V 2 3A			
Number of outputs Charge current second output	2 3A 30–150 Ah 230V (180–265V)	2 3A 50-250 Ah	2 3A			
Charge current second output	3A 30–150 Ah 230V (180–265V)	3A 50-250 Ah	3A			
	30-150 Ah 230V (180-265V)	50-250 Ah				
Recommended hattery canacity	230V (180-265V)					
necommended battery capacity			100-500 Ah			
Nominal input voltage	30/00112	230 V (180-265 V) 50/60 Hz	230 V (180-265 V) 50/60 Hz			
Power supply mode	yes	yes	yes			
Display/read-out	LED display	LED display	LED display			
Dimensions, HxWxD	12.8" x 8.7" x 4.4" 325 x 220 x 111 mm	14.4" x 8.7" x 4.4" 365 x 220 x 111 mm	13.4" x 10.3" x 5.1" 340 x 261 x 130 mm			
Weight	7.3 lb / 3.3 kg	7.7 lb / 3.5 kg	10.1 lb / 4.6 kg			
Approvals*		CE, ABYC A-31, RRR, RMRS				
Technical Specifications						
Charge characteristic**	IUoUo, autom	atic / 3-step+ for Gel/AGM/flooded/Lithiun	n Ion (LiFePO4)			
Temperature sensor	yes (included)	yes (included)	yes (included)			
DC voltage compensation	yes	yes	yes			
DC consumption	<1 mA	< 1 mA	< 1 mA			
Full load consumption	550 W	880 W	1600 W			
Power factor control	>0.95	> 0,95	> 0,95			
Temperature range (ambient temp.)	-13°F to 17	-13°F to 176°F, derating > 113°F (-25°C to 80°C, derating > 45°C)				
Cooling	vario fan	vario fan	vario fan			
Protection degree	IP23	IP23	IP23			
Protections	over temper	rature, over load, short circuit, high/low ba	ttery voltage			
MasterBus® compatible	yes	yes	yes			
Charger Status Interface (alarm contact)	yes	yes	yes			
Options						
EasyView 5 77010310		option ight readable' color display and intuitive m				
	along with a buzzer and alarm notifica	t a glance. There is also a logbook feature itions. The home button gives access to fa	for warnings and alarms, vorite pages.			
MasterShunt	option	option	option			
77020115	incl voltage, current, remaining time a	ailed information on the status of your bat nd consumption capacity in percentage.				
Mastervolt® USB Interface 77030100	option	option	option			
77030100		Bus and the USB port of your PC; makes p en combined with MasterView System soft				
Temperature Sensors 41500500, 6M	included	included	included			
41500800 , 15M	option	option	option			
GMDSS remote panel	option	option	option			
70400050	Remote monitoring for Mass battery chare displayed on the digital panel.	nargers, with GMDSS system monitoring fu	inctions. Battery voltage and current			
Front panel with GMDSS remote panel	n.a.	n.a.	n.a.			

^{*} Check our website for the certificates per model. ** The charge characteristic can be set to your requirements.

mastervolt.com POWER CONVERSION 39

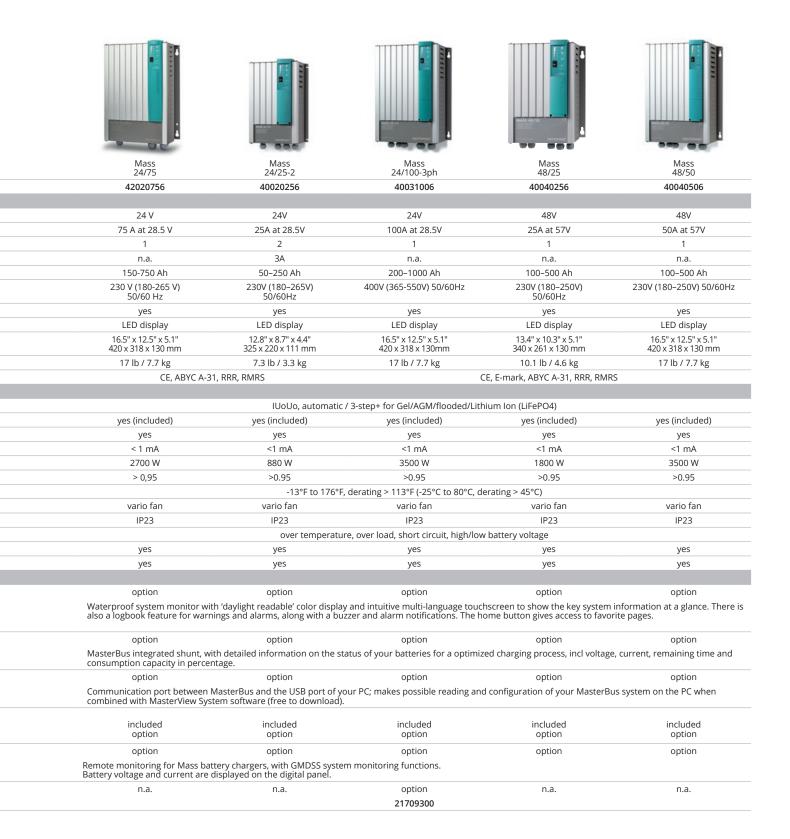

ChargeMaster Plus Series Battery Chargers:

All-in-one solution for faster and safer charging

ChargeMaster Plus is the next generation battery chargers that integrates multiple functions into one single device. Replacing auxiliary chargers, battery isolators and VSR, ChargeMaster Plus reduces system complexity and cost. Designed for versatility, it charges virtually any combination of three batteries at high speed and works anywhere in the world.



ChargeMaster Plus Series Features

- MasterBus®, CZone and NMEA 2000® communication.
- Multicharger with two outputs, one in/output, DC-DC converter, current limiter and VSR
- Combine Lithium Ion, Gel or AGM, and large or small 12/24V battery banks on a single charger (24V models only)
- Charges multiple batteries while being underway
- Extended Specifications: offers 20% more output at 14.4V and 80% charging power at 140°F (60°C)
- Safe Charge: quickly recognize the State-of-Charge for extended battery life
- Very wide operating range of 80-275V AC, 35-70 Hz
- Compact, easy to connect and quick to install
- Pre-float prevents batteries that are nearly full from overcharging
- All 3 outputs can provide maximum current*

 $\hbox{*The total charging current shall not exceed the maximum of the model.}$

mastervolt.com POWER CONVERSION 41



With the new Battery's best friend architecture, ChargeMaster Plus is capable of charging a multitude of battery chemistries, sizes and voltages. All batteries are charged with the fast and safe 3-step+ charge method.

Other unique features are:

- Revival mode: automatically revives even fully depleted batteries
- Multi voltage: charge 12V starter battery in a 24V system, without additional components (24V models only).
- Priority charge: redirect available power to the lowest battery, for faster charging.
- Smart Input: charge all three batteries from one single alternator for continuous charging on the go.

Global charging



The ChargeMaster Plus handles worldwide AC voltages and frequencies. Resisting large voltage fluctuations and high temperatures, it keeps working in harsh environments. For marine and mobile markets, ChargeMaster Plus is CE, ABYC, UL, SAE, CEC and RCM/C-Tick compliant.

System simplicity



Nowadays, equipment must be self-explaining. The ChargeMaster Plus displays the charge phase of all three outputs in an understandable way. Robust and ergonomic connections save installation time. An integrated VSR eliminates the need for additional components and ensures that the alternators energy is funnelled through to the batteries.

Powerful connections CZone Integration



In modern applications, all electrical components work together. The CAN-based MasterBus enables the ChargeMaster Plus to communicate with displays, shunts and power systems. Models with the addition

"CZone integrated" do not only support MasterBus, but also support CZone and NMEA 2000® communication, without the need of additional interfaces. The ChargeMasters Plus series can be configured via MasterBus or will accept a CZone configuration file just like any other CZone device. Other communication standards like ModBus, CANopen, LinBus, etc. are supported via additional interfaces. This wide range of communication interfaces makes the ChargeMaster Plus ideally suited for system integration. All models of the ChargeMaster Plus series can operate as a power supply for delicate communication equipment, or during the construction phase of a boat.







TECH TIP

ChargeMaster Plus simplifies charging systems. Charging faster and safer than ever, this all-in-one charging solution offers best value for money.



ChargeMaster Plus Battery Chargers

Specifications – 12V & 24V



77020115

77030100

Mastervolt® USB Interface











C power system					
	ChargeMaster Plus 12/35-3	ChargeMaster Plus 12/50-3	ChargeMaster Plus 12/75-3	ChargeMaster Plus 12/100-3	
Part #	44310305	44310505	44310755	44311005	
General Specifications					
Nominal output voltage	12V	12V	12V	12V	
Max. charge current per output	35V	50V	75A	100A	
Smart In-/Output output voltage	12V	12V	12V	12V	
Smart In-/Output output current	n.a.	n.a.	5-40A (adjustable)	5-10A at 12V	
Smart In-/Output input current	n.a.	n.a.	max. 40A	max. 40A	
Secondary output voltage	n.a.	n.a.	n.a.	n.a.	
Secondary output current	n.a.	n.a.	n.a.	n.a.	
Max. AC current (230 V / 120 V)	2.4A/4.9A	3.5A/7A	5.6A / 11.8A	7.5A / 14.9A	
Total charge current	35A at 14.4V	50A at 14.4V	75A at 14.4V	100A at 14.4V	
Number of outputs	3 (max.)	3 (max.)	3 (max.)	3 (max.)	
Recommended battery capacity	70-300 Ah	140-400 Ah	320-800 Ah	400-1000 Ah	
Nominal input voltage	120/230V (80-	275V) 50/60 Hz	120/230V (80-	275V) 50/60 Hz	
AC connection	screw terminals	screw terminals	screw terminals	screw terminals	
Power supply mode	yes	yes	yes	yes	
Display/read-out	LED	LED	LED	LED	
Dimensions, hxwxd	11.5" X 8.3" X 4.1" (2	291 X 210 X 105 mm)	15.1" x 9.8" x 5" (38	34 x 250 x 127 mm)	
Weight	5.5 lb / 2.5 kg	5.5 lb / 2.5 kg	13 lb / 5.9 kg	13 lb / 5.9 kg	
Approvals		CE, ABYC, UL1236, SAE J117	1, ISO 8846, CEC, RCM/C-Tick		
Technical Specifications					
Charge characteristic Charge characteristic can be set to your requirements		3-step+ for Gel/AGM/ PO4)/traction/spiral		tic / 3-step+ for LiFePO4)/traction/spiral	
Temperature compensation		(-30 mV/°C) sensor included		(-30 mV/°C) ensor included	
Voltage compensation	through M	lasterShunt	through M	asterShunt	
DC consumption	< 2 mA (Ma	sterBus® off)	< 2 mA (Ma	sterBus off)	
Current Control function	yes, throug	h MasterBus	yes, through	n MasterBus	
Power factor	> 0.98	> 0.98	> 0.98	> 0.98	
Temperature range (ambient temp.)		derating > 104°F derating > 40°C)		derating > 104°F derating > 40°C)	
Cooling	vario fan	vario fan	vario fan	vario fan	
Protection degree	IP23, vertic	al mounting	IP23, vertica	al mounting	
Protections	over-temp	erature, overload, short circuit, h	nigh/low battery voltage, ignition	protection	
Communication	MasterBus, CZo	ne, NMEA 2000®	MasterBus, CZo	ne, NMEA 2000®	
Charger Status Interface (alarm contact)		Multipurpose (part # 77030500)		Multipurpose part # 77030500)	
Options					
EasyView 5	option	option	option	option	
77010310	system information at a glance	rith 'daylight readable' color disp e. There is also a logbook feature n gives access to favorite pages.			
MasterShunt	option	option	option	option	
77020115					

MasterBus integrated battery monitor, with detailed information on the status of your batteries for a optimized charging process, incl. voltage, current, remaining time and consumption capacity in percentage.

Communication port between MasterBus and the USB port of your PC; makes possible reading and configuration of your MasterBus system on the PC when combined with MasterView System software (free to download).



ChargeMaster Series Battery Chargers:

Charge your batteries quickly and completely





Make the most of your batteries with the ChargeMaster series, plugging in and charging anywhere in the world. Mastervolt®'s ChargeMaster guarantees fast and complete charging of your batteries no matter where you are. And thanks to Mastervolt's innovative 3-step+ charging process, batteries also perform better and last longer.



ChargeMaster Series Features

- For recreational and semi-professional use
- Suitable for any type of battery, including Lithium Ion batteries
- 3-Step+ charging technology for fast and complete charging, also charges depleted batteries
- Memory function prevents overcharging in case of unreliable mains
- Safe and complete charging due to standard safety features
- Charging capacity up to 1000 Ah battery banks
- Easy to connect and guick to install
- Can charge multiple battery banks simultaneously
- Built-in system functionality (MasterBus) in combination with other Mastervolt products
- · Clear control panel
- Supplies your system without battery
- The auto-ranging AC input operates on 120V and 230V and makes these chargers suitable for operating on almost any AC power source in the world.

mastervolt.com POWER CONVERSION 45





All ChargeMasters can be easily connected to a MasterBus® network with only one cable and one connection. What's more, you have the option for central, local or remote monitoring, configuration

and control of your system.

Clear Display

A clearly lit display on the ChargeMaster provides all essential information: charge current, charge voltage, charge phase and battery content measurement and/or battery condition measurement as a percentage of available Ah capacity. The read-out panel also provides an indication of MasterBus communication.

The ChargeMaster is available in various models to guarantee you the ideal battery charger for any situation and demand.

Powerful connections CZone® Integration



In modern applications, all electrical components work together. The CAN-based MasterBus enables the ChargeMaster to communicate with displays, shunts and power systems. Models with the addition "CZone"

integrated" do not only support MasterBus, but also support CZone and NMEA 2000® communication, without the need of additional interfaces. The ChargeMasters series can be configured via MasterBus or will accept a CZone configuration file just like any other CZone device. Other communication standards like ModBus, CANopen, LinBus, etc. are supported via additional interfaces. This wide range of communication interfaces makes the ChargeMaster ideally suited for system integration. All models of the ChargeMaster series can operate as a power supply for delicate communication equipment, or during the construction phase of a boat.

Charging your batteries with every voltage

The Mastervolt ChargeMaster supplies a maximum capacity wherever you are via auto-ranging. Auto-ranging ensures perfect fully automatic operation anywhere in the world, regardless of the available mains voltage (90-265V AC, 50 or 60 Hz). The 3-step+ charging technology guarantees fast and complete charging, while the cos phi 1 regulation gets the most out of limited generator capacity.



Robust connections

Solid metal-to-metal connectors equipped with strain relief prevent corrosion and overheating.



Charging multiple battery banks

The ChargeMaster series has three equal charge outputs. The total output current is divided over these three outputs. Those of the smaller ChargeMaster models are pre-installed with two meters of cable for a plug & play solution.

DC power supply

Even if the batteries are not connected, Mastervolt ChargeMaster battery chargers can provide a constant DC output allowing you to turn on lights or keep the fridge cold.

ChargeMaster Battery Chargers

Specifications – 12V & 24V





ChargeMaster	
12/25-3	

ChargeMaster

	ChargeMaster 12/25-3	ChargeMaster 24/12-3
Part # (UL Certified Part #)	44010250	44020120
General Specifications		
Nominal output voltage	12V	24V
Total charge current	25A at 13.25V	12A at 26.5V
Number of battery outlets	3	3
Charge current second output	25A	12A
Charge current third output	25A	12A
Recommended battery capacity	50-250 Ah	24-120 Ah
Nominal input voltage	120/230V (90-265V) 50/60Hz	120/230V (90-265V) 50/60Hz
AC connection	6.5 ft (2 m) AC cable	6.5 ft (2 m) AC cable
Power supply mode	yes	yes
Display/read-out	LED display	LED display
Dimensions, HxWxD	9.2" x 5.2" x 2.4" 234 x 132 x 60 mm	9.2" x 5.2" x 2.4" 234 x 132 x 60 mm
Weight	4 lb / 1,8 kg	4 lb / 1.8 kg
Fastening	4x screw	4x screw
Approvals	CE, ABYC A-31, SAE J1171/ISO 8846 ignition protected, RRR	CE, ABYC A-31, SAE J1171/ISO 8846 ignition protected, RRR
Technical Specifications		
Charge characteristic*		
Temperature compensation	yes	yes
Voltage compensation	automatic	automatic
DC consumption	<2 mA	<2 mA
Full load consumption (230V AC)	450 W	435 W
Current Control function	no	no
Power factor control	≥0.98	≥0.98
Temperature range (ambient temp.)		
Cooling	vario fan	vario fan
Protection degree	IP23	IP23
Protections		
MasterBus® compatible	yes	yes
Options		
EasyView 5 77010310	option	option
MasterShunt 77020115	option	option
Mastervolt® USB Interface 77030100	option	option
Multipurpose Contact Output 77030500	option	option
Temperature Sensors 41500500, 6M 41500800, 15M	included option	included option

 $[\]mbox{\ensuremath{\mbox{\scriptsize \star}}}$ The charge characteristic can be set to your requirements.



Mastervolt® DC-DC Converters: For 12V, 24V and 48V

A DC-DC converter can provide other voltages than applied in your basic system. By using a DC-DC converter, other voltages can be reached. They also ensure that all your equipment has a stable power supply with the right voltage.

Mac Plus Series

- · Professional use
- · Converter and 3-step battery charger
- · Parallel switchable
- · Adjustable and programmable output voltage
- · Voltage stabilization for a longer lifespan of halogen lights, etc
- · Dimmer function
- Optimal charging in Euro 5/6 applications

The **Mac Plus** is ideal for charging service batteries in vehicles with a smart Euro 5/6 alternator, charging the batteries quickly, even when the alternator is inactive and the battery voltage very low. The automatic start/stop function ensures that empty starter batteries become a thing of the past. The Mac Plus comes with integrated MasterBus® (CAN) communication, CZone®/NMEA 2000® and and E-mark certification. It seamlessly charges Lithium Ion, Gel and AGM batteries via the tried and tested Mastervolt 3-stage charging method.

DC Master Series

- Recreational and semi-professional use
- · Easy to install using included mounting bracket
- · Excellent price/performance ratio
- Available in isolated and non-isolated version

Magic Series

- · Professional use
- · Converter and 3-step battery charger
- · Parallel switchable
- · Adjustable and programmable output voltage
- · Voltage stabilization for a longer lifespan of halogen lights, etc
- · Dimmer function

The **Magic** models can regulate the voltage both up and down to ensure an optimal voltage stabilization even when the battery voltage fluctuates due to heavy loads. The galvanic isolation between input and output prevents disruptions to, for instance, communication equipment.

Non-isolated or isolated

The non-isolated Mac Plus and DC Master models have an electrical connection between the input and output.

Features:

- Low costs
- Efficient: low heat generation
- Compact
- · Suited to applications with negative earthing

The isolated Magic and DC Master models provide galvanic isolation between input and output circuits.

Features:

- Extra touch-proof
- Interference suppression for sensitive equipment
- · Available with negative or positive grounding



mastervolt.com POWER CONVERSION 49



Programmable via laptop or PC



Remote control the Mac or Magic via your laptop or PC or configure your personal preferences.

The device has a communication port and easy installation with a PC-Link and MasterAdjust software.

Energy-saving dimmer function





Many standard light dimmers convert part of the energy to heat and also lose unnecessary

energy. The Mastervolt Magic converters regulate the power supply efficiently and without excessive heat build-up, for optimal safety (multiple Magic converters can be used for multiple lamps).

Euro 5/6 solutions



Charging service batteries in Euro 5/6 applications? The Mac Plus provides constant power to the service battery, even when the alternator is inactive.

Parallel operation





Lots of consumers on board? The parallel configuration of several units will provide you

over 100 amps. Advanced highfrequency technology with modern microprocessors ensures minimum power loss when switching from 24V to 12V and vice versa.

3-Step battery charger



Connected to the 12V or 24V main battery, the converter can also be used as an advanced 3-step+ battery charger for Gel, AGM, flooded or Lithium Ion batteries

Solid connections



Galvanized brass connection block with screw terminal or chrome-plated fast-on for DC in/out for the Magic models. The robust M8 connections of the Mac Plus prevent any loosening due to vibrations.

Mac Plus DC-DC Converters



Specifications











Specifications						
•	Mac Plus 12/12V-50	Mac Plus 12/24V-30	Mac Plus 24/12V-50	Mac Plus 24/24V-30	Mac Plus 24/24V-50	
Part # (IP23)	81205105	81205305	81205205	81205405	81205505	
Specifications Input						
Nominal input voltage	12V	12V	24V	24V	24V	
Input range	8 - 16V DC	8 - 16V DC	16 - 32V DC	16 - 32V DC	16 - 32V DC	
Specifications Output						
Nominal output voltage	12V DC	24V DC	12V DC	24V DC	24V DC	
Output voltage	10-15V DC	20-30V DC	10-15V DC	20-30V DC	20-30V DC	
Output voltage dimmer*	n.a.	n.a.	n.a.	n.a.	n.a.	
Output voltage stabilisation		2% at extre	emes of temperatures, load	d and input		
Ripple	max. 1% peak peak	max. 1% peak peak	max. 1% peak peak	max. 1% peak peak	max. 1% peak peak	
Power (max./nominal)	750 / 710 W	760 / 760 W	750 / 710 W	900 / 850 W	1500 / 1425 W	
Max. current	50A	30A	50A	30A	50A	
Parallel configuration	yes	yes	yes	yes	yes	
Charge current – 3-step mode	50A	30A	50A	30A	50A	
General Specifications						
Galvanic isolation	no	no	no	no	no	
Voltage limited	yes	yes	yes	yes	yes	
Efficiency			om. input voltage, full load		,	
Protections			load, over-temperature, re	•		
Dimmer function	n.a.	n.a.	n.a.	n.a.	n.a.	
Alarm contact	yes, through MasterBus® and CZone®					
Dimensions, HxWxD	10" x 6.5" x 2.6" 255 x 165 x 66 mm	10" x 6.5" x 2.6" 255 x 165 x 66 mm	10" x 6.5" x 2.6" 255 x 165 x 66 mm	10" x 6.5" x 2.6" 255 x 165 x 66 mm	10" x 6.5" x 2.6" 255 x 165 x 66 mm	
Weight	4.4 lb / 2 kg	4.4 lb / 2 kg	4.4 lb / 2 kg	4.4 lb / 2 kg	4.4 lb / 2 kg	
Approvals	CE, E-Mark, SAE J1171 & ISO 8846 Ignition Protected	CE, E-Mark, SAE J1171 & ISO 8846 Ignition Protected	CE, E-Mark, SAE J1171 & ISO 8846 Ignition Protected	CE, E-Mark, SAE J1171 & ISO 8846 Ignition Protected	CE, E-Mark, SAE J1171 & ISO 8846 Ignition Protected	
Technical Specifications						
3-Step charge option	yes (DIP switch settings)	yes (DIP switch settings)	yes (DIP switch settings)	yes (DIP switch settings)	yes (DIP switch settings)	
DC consumption	<5 mA	<5 mA	<5 mA	<5 mA	<5 mA	
Connections input/output			m², (positive input, positive .5 mm² (remote on/off, ter			
Temperature range (ambient temp.)		-13°F-140°F, >1	04°F derating (-25°C–60°C,	, >40°C derating)		
Cooling	natural cooling	natural cooling	natural cooling	natural cooling	natural cooling	
Protection degree	IP23	IP23	IP23	IP23	IP23	
MasterBus compatible / CZone Compatible	yes / yes	yes / yes	yes / yes	yes / yes	yes / yes	
Integrates with Fathom® Fathom 3000 Series Fathom 5000 Series Fathom 7000 Series	option option option	no option option	option option option	no option option	no no standard	
Options						
EasyView 5	option	option	option	option	option	
77010310	Waterproof system monitor with 'daylight readable' color display and intuitive multi-language touchscreen to show the key system information at a glance. There is also a logbook feature for warnings and alarms, along with a buzzer and alarm notifications. The home button gives access to favorite pages.					
Temperature Sensors 41500500 , 6M 41500800 , 15M	included option	included option	included option	included option	included option	

 $[\]mbox{\ensuremath{\star}}$ Adjustable with Master Adjust software.

mastervolt.com POWER CONVERSION 51









Mac Plus 12/48V-15	Mac Plus 24/48V-15	Mac Plus 48/12-50	Mac Plus 48/24-30
81203205 NEW	81203405 NEW	81203105 NEW	81203305 NEW
12V	24V	36/48V	36/48V
8 - 16V DC	18 - 32V DC	32 - 64V DC	32 - 64V DC
36/48V DC	36/48V DC	12V DC	24V DC
30-60V DC	30-60V DC	10-15V DC	20-30V DC
n.a.	n.a.	n.a.	n.a.
	2% at extremes of temp	eratures, load and input	
max. 1% peak peak			
900 / 855 W	900 / 855 W	750 / 710 W	900 / 855 W
15A	15A	50A	30A
yes	yes	yes	yes
15A	15A	50A	30A
no	no	no	no
yes	yes	yes	yes
	> 95% at f	ull output	
DC short o	ircuit, overload, over-ter	nperature, reversed pola	rity (fuse)
n.a.	n.a.	n.a.	n.a.
	yes, through Mas	sterBus & CZone	
10" x 6.5" x 2.6" 255 x 165 x 66 mm	10" x 6.5" x 2.6" 255 x 165 x 66 mm	10" x 6.5" x 2.6" 255 x 165 x 66 mm	10" x 6.5" x 2.6" 255 x 165 x 66 mm
4.4 lb / 2 kg			
CE, E-Mark, SAE J1171 & ISO 8846 Ignition Protected			
yes (DIP switch settings)	yes (DIP switch settings)	yes (DIP switch settings)	yes (DIP switch settings)
<5 mA	<5 mA	<5 mA	<5 mA
MO	scrout terminal wire size	10 to F0mm2 (AMC 0 to	. 0)

M8 screw terminal, wire size 10 to 50mm2 (AWG 0 to 8)

-13°F-140°F, >104°F derating (-25°C-60°C, >40°C derating)

natural cooling	natural cooling	natural cooling	natural cooling
IP23	IP23	IP23	IP23
yes (not powering) / yes			
no	no	no	no
no	no	no	no
standard	option	option	option
option	option	option	option

Waterproof system monitor with 'daylight readable' color display and intuitive multi-language touchscreen to show the key system information at a glance. There is also a logbook feature for warnings and alarms, along with a buzzer and alarm notifications. The home button gives access to favorite pages.

included	included	included	included
option	option	option	option

Mac Plus series:

Robust DC-DC charger guarantees optimal condition of your service battery

Traditionally, a service battery is linked to the starter battery by means of a charge relay. The starter battery is located close to the alternator and receives most of the charge current. However, the service battery is usually further away. Long cables cause voltage drop, leading to slow charging, resulting in failing appliances and premature failure of the battery.

Modern, fuel efficient engines are equipped with smart alternators, following regulations such as Euro 5 and Euro 6. Instead of a constant output, smart alternators provide a variable voltage; after a brief charging period, voltage is reduced and the charging stops. Furthermore, the energy produced by regenerative braking leads to voltage peaks. Service batteries coupled in the traditional way will receive hardly any charge and may be damaged by these peak voltages.

To solve these issues, Mastervolt® introduces the Mac Plus DC-DC chargers, available in 12, 24 and 48V (and supports 36V). The Mac Plus monitors the service battery and compensates the voltage loss. The proven 3-step charge method ensures a quick and safe charge. Moreover, by stabilizing the charge voltage, Mac Plus protects your service battery and sensitive equipment.

Features

- Fast and safe charging during short trips
- Fanless design for silent operation
- Suitable for flooded, Gel, AGM and Li-Ion batteries (incl. LiFePO4)
- Charges even fully depleted batteries
- Engine run detection protects starter battery
- Adjustable current limits to meet Euro 5/6 requirements
- Voltage stabilisation protects sensitive equipment, lights and loads
- Parallel operation to obtain charging capacities well over 100 amps
- MasterBus for intelligent system monitoring and automation
- Temperature compensation and voltage sense for an optimal charging result
- E-mark certification for mobile applications.
- Power supply mode
- Heavy duty connections for easy installation and quick set up via DIP switches

Magic Converters Specifications










	Magic 24/12-20	Magic 24/24-20	Magic 12/12-20	Magic 12/24-10
Part #	81300100	81300200	81300400	81300300
Specifications Input				
Nominal input voltage	24V	24V	12V	12V
Input range	19-32V DC	19-32V DC	11-16V DC	11-16V DC
Input range, 3-step charge mode	24-32V DC	24-32V DC	12-16V DC	12-16V DC
Lower input set point	20V DC*	20V DC*	10V DC*	10V DC*
Delay lower input set point	30 sec.*	30 sec.*	30 sec.*	30 sec.*
Specifications Output				
Nominal output voltage	13.6V DC*	27.2V DC*	13.6V DC*	27.2V DC*
Output voltage	10-15V DC	20-28.5V DC	10-15V DC	20-28.5V DC
Output voltage dimmer*	4-13V DC	8-26V DC	4-13V DC	8-26V DC
Output voltage stabilisation		2% at extremes of temp	eratures, load and input	
Ripple	max. 1% peak peak	max. 1% peak peak	max. 1% peak peak	max. 1% peak peak
Power (max./nominal)	300 / 300 W	580 / 580 W	300 / 300 W	300 / 300 W
Max. current	20A	20A	20A	10A
Parallel configuration	yes	yes	yes	yes
Charge current – 3-step mode	16A	16A	16A	8A
General Specifications				
Galvanic isolation	yes	yes	yes	yes
Voltage limited	yes	yes	yes	yes
Efficiency		>90% (at nominal input vo	oltage, full load); 92% peal	<
Protections		over-load & ov	er-temperature	
Dimmer function	yes, by external mom	entary switch via fast-on c	onnection, to be activated	d by DIP-switch setting
Alarm contact	yes (fast-or	n connector)	yes (fast-on	connector)
Dimensions, HxWxD	8.9" x 6.1"x3.2" 227 x 154 x 81 mm	8.9" x 6.1" x 3.2" 227 x 154 x 81 mm	8.9" x 6.1" x 3.2" 227 x 154 x 81 mm	8.9" x 6.1" x 3.2" 227 x 154 x 81 mm
Weight	4 lb / 1.8 kg	4 lb / 1.8 kg	4 lb / 1.8 kg	4 lb / 1.8 kg
Approvals	CE	CE	CE	CE
Technical Specifications				
3-Step charge option	yes (DIP switch settings)	yes (DIP switch settings)	yes (DIP switch settings)	yes (DIP switch settings)
DC consumption	<115 mA	<115 mA	<115 mA	<115 mA
Connections input/output	9	screw terminals, maximun	n wire size 16 mm² / AWG	5
Temperature range (ambient temp.)	-13	°F–140°F, >104°F derating	(-25°C-60°C, >40°C derat	ting)
Cooling	maintenance free vario fans	maintenance free vario fans	maintenance free vario fans	maintenance free vario fans
Protection degree	IP21	IP21	IP21	IP21
MasterBus® compatible	yes, in con	nbination with a MasterBu	ıs Serial Interface (Part #	77030450)
Options				
EasyView 5	option	option	option	option
77010310	Waterproof system monitor with 'daylight readable' color display and intuitive multi-language touchscreen to show the key system information at a glance. There is also a logbook feature for warnings and alarms, along with a buzzer and alarm notifications. The home button gives access to favorite pages.			
Temperature Sensors 41500500 , 6M 41500800 , 15M	n/a	n/a	n/a	n/a

 $[\]mbox{\ensuremath{\star}}$ Adjustable with Master Adjust software.



Magic as power supply

The Magic models can be fully used as a stabilized power supply: From 12 to 12V, 12 to 24V, from 24 to 12V or from 24 to 24V. Inputs and outputs are galvanically isolated.

For detailed specifications, dimensional drawings, 3D files, images, certificates and manuals see **mastervolt.com**.



DC Master Specifications Non-Isolated

54









	24/12-3A	24/12-6A	24/12-12A	24/12-24A	
Part #	81400100	81400200	81400300	81400330	
Input Specifications					
Nominal input voltage	24V	24V	24V	24V	
Input range	20-32V DC	20-32V DC	20-32V DC	20-32V DC	
Output Specifications					
Nominal output voltage	13.6V	13.6V	13.6V	13.6V	
Maximum power	82 W	136 W	245 W	408 W	
Nominal power	41 W	82 W	164 W	326 W	
Current max. 2 minutes* / continuous	6A / 3A	10A / 6A	18A / 12A	30A / 24A	
DC consumption	< 15 mA	< 15 mA	< 15 mA	< 15 mA	
General Specifications					
Dimensions, HxWxD	2.6" x 3.4" x 2" 67 x 87 x 50 mm	3.5" x 3.4" x 2" 89 x 87 x 50 mm	5" x 3.4" x 2" 127 x 87 x 50 mm	5" x 3.4" x 2" 167 x 87 x 50 mm	
Weight	0.5 lb / 200 gr	0.6 lb / 270 gr	0.9 lb / 405 gr	1.4 lb / 635 gr	
Approvals	CE, E-mark	CE, E-mark	CE, E-mark	CE, E-mark	
Galvanic isolation	no	no	no	no	
Stabilized	yes	yes	yes	yes	
Connections input/output	fast-on	fast-on	fast-on	fast-on	
Temperature range (ambient temp.)	-1:	3°F to176°F, >86°F derating	(-25°C to 80°C, >30°C deration	ng)	
Cooling	natural cooling	natural cooling	natural cooling	natural cooling	
Protection degree	IP53	IP53	IP53	IP53	

Isolated










	12/12-3A	12/12-6A	24/12-3A	24/12-6A	
Part #	81500600	81500700	81500100	81500200	
Input Specifications					
Nominal input voltage	12V	12V	24V	24V	
Input range	10-15.5V DC	10-15.5V DC	20-32V DC	20-32V DC	
Output Specifications					
Nominal output voltage	13.6V	13.6V	13.6V	13.6V	
Maximum power	54 W	108 W	82 W	136 W	
Nominal power	41 W	82 W	41 W	82 W	
Current max. 2 minutes* / continuous	4A / 3A	8A / 6A	6A / 3A	10A / 6A	
DC consumption	< 15 mA	< 15 mA	< 15 mA	< 15 mA	
General Specifications					
Dimensions, HxWxD	3.5" x 3.4" x 2" 89 x 87 x 50 mm	5" x 3.4" x 2" 127 x 87 x 50 mm	3.5" x 3.4" x 2" 89 x 87 x 50 mm	5" x 3.4" x 2" 127 x 87 x 50 mm	
Weight	0.6 lb / 290 gr	1 lb / 440 gr	0.6 lb / 290 gr	1.1 lb / 505 gr	
Approvals	CE, E-mark	CE, E-mark	CE, E-mark	CE, E-mark	
Galvanic isolation	yes	yes	yes	yes	
Stabilized	yes	yes	yes	yes	
Connections input/output	fast-on	fast-on	fast-on	fast-on	
Temperature range (ambient temp.)	-1	3°F to176°F, >86°F derating	(-25°C to 80°C, >30°C derati	ng)	
Cooling	natural cooling	natural cooling	natural cooling	natural cooling	
Protection degree	IP53	IP53	IP53	IP53	

 $[\]mbox{\ensuremath{\star}}$ Two minutes of extra power for short power boosts.

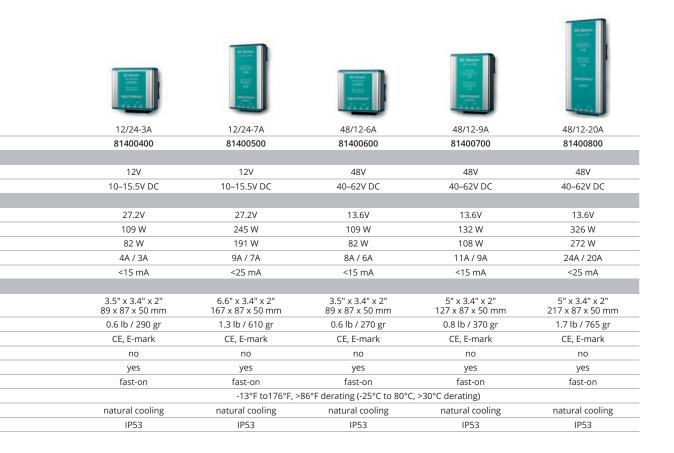





For detailed specifications, dimensional drawings, 3D files, images, certificates and manuals see **mastervolt.com**.

Mastervolt® Transfer Systems:

Manages AC power sources

A Mastervolt transfer system forms the heart of your AC system and regulates the power supply from the electricity grid, generator or inverter. It also automatically selects the right energy source at the right time.

Mass Systemswitch: The complete system solution

The Mass Systemswitch automatically transfers three available AC power sources to the right outputs. As well as providing more comfort on board, the automatic transfer also has a safety function: the transfer relay prevents short-circuiting between the various AC sources. The Mass Systemswitch 10 and 16 each have four outputs: 'generator only', 'power', 'shortbreak' and 'inverter only', while the Mass Systemswitch 6 has three (3) outputs: 'power', 'shortbreak' and 'inverter only'.

Masterswitch: The simple solution

Masterswitch offers you the choice of two energy sources, such as the inverter or grid power, with one of the inputs always having priority. The Masterswitch is available in multiple capacities, and all models are suitable for use with a generator by means of an adjustable transfer delay.

- Three AC inputs; for example inverter, grid power and generator
- Three or four outlets to AC power groups
- · Automatic switching
- Power transfer from 4.5 kW to 16 kW, input/output from 25A to 63A
- Information source for central energy management via MasterBus network
- · MasterBus compatible
- Two AC inputs; for example grid power and inverter
- · Adjustable transfer delay for generators
- · One outlet to AC power group
- · Automatic switching
- Power transfer up to 25 kW, input/output from 20A to 125A







Smart electronics

The intelligent electronics control the switching to ensure an optimal energy management. Its double pole relay is durable and extremely safe.

LED indications on Systemswitch



Read-out of the basic functions on the display, including indication of available power source, generator, grid power or inverter and 'load on inverter' function.

Central Energy Management



The Easy View 5 with intuitive controls and color touchscreen shows key system information at a glance. Provided with a multi-language menu, the home button gives easy access to your favorite pages. System alerts and alarms are tracked through the logbook feature.





As the Mass Systemswitch is suitable for MasterBus, all information can also be read-out on, for instance, a EasyView display, including the status of the charge current and the inverter.



Transfer Systems Specifications



Mass Systemswitch







	Mass Systemswitch 16 kW	Masterswitch 5 kW	Masterswitch 3 kW (120V)	Masterswitch 10 kW	
Part #	55008205	55006010	55006000	55006015	
General Specifications					
Nominal input voltage	230V (50/60Hz)	230V (50/60Hz)	120V (50/60 Hz)	230V (50/60Hz)	
Input voltage range	200-250V AC	200-250V AC	100-125V AC	200-250V AC	
Number of inputs	3	2	2	2	
Number of outputs	4	1	1	1	
Dimensions, HxWxD	13.4" x 10.3" x 5.7" 340 x 261 x 144 mm	7.9" x 4.3" x 4.5" 200 x 110 x 115 mm	7.9" x 4.3" x 4.5" 200 x 110 x 115 mm	7.9" x 4.3" x 4.5" 200 x 110 x 115 mm	
Weight	11 lb / 5 kg	2.6 lb / 1.2 kg	2.6 lb / 1.2 kg	2.9 lb / 1.3 kg	
Technical Specifications					
Connection for remote control	yes	no	no	no	
MasterBus® compatible	yes	no	no	no	
LED indication on cabinet	indication voltage sources present and 'load on inverter' mode	no	no	no	
Nominal input current generator	63A	20A	25A	40A	
Nominal input current shore	40A	20A	25A	40A	
Nominal input current inverter	25A	n.a.	n.a.	n.a.	
Earth leakage switch	no	n.a.	n.a.	n.a.	
Generator input switch	continuous monitoring of voltage and frequency	no	no	no	
Time delay generator input	0-10 sec (adjustable)	0-10 sec (adjustable)	0-10 sec (adjustable)	0-10 sec (adjustable)	
Nominal current shortbreak output	25A	n.a.	n.a.	n.a.	
Nominal current power output	40A	20A	20A	40A	
Nominal current generator output	63A	n.a.	25A	n.a.	
Automatical circuit breakers	no, system dependent	no, system dependent	no, system dependent	no, system dependent	
Power consumption (AC all inputs)	33 W	7 W	7 W	7 W	
Power consumption (only inverter power)	<1 W	0 W	0 W	0 W	
Temperature range (specified)	-23°F to 140°F ((-31°C to 60°C)	-23°F to 140°F	(-31°C to 60°C)	
Temperature range (allowed)	-13°F to 158°F ((may not meet the s			(-25°C to 70°C) specified tolerances)	
Temperature range (storage/non operating)	-76°F to 176°F (-60°C to 80°C)	-76°F to 176°F (-60°C to 80°C)	-76°F to 176°F (-60°C to 80°C)	-76°F to 176°F (-60°C to 80°C)	
Relative humidity	maximum 95%, r	non condensing	maximum 95%,	non condensing	
Transfer time	switch on 12-22 ms	switch off 4-19 ms	switch on 12-22 ms	/ switch off 4-19 ms	
Frequency watch	yes	no	no	no	
Cable size	0.5-10 mm ² /AWG 20-7, remote control: 0.14-2.5 mm ² /AWG 26-13	0.5-10 mm ² /AWG 20-7	0.5-10 mm ² /AWG 20-7	0.5-10 mm ² /AWG 20-7	
Protection degree	IP23	IP55	IP55	IP55	

Advantages of the Mastervolt® transfer system

- Activating and selecting 230V sources: Grid power, inverter and generator (adjustable to amperage of grid power, for instance 6A)
- Prevents parallel connection between inverter and other 230V sources, avoiding damage to the inverter
- Fully compatible with Mastervolt systems, and suitable for installations from other brands, other generators and/or inverters





Masterswitch	
7 kW (120V)	

Masterswitch 25 kW

(- /	
55106100	55003500
120 V (50/60 Hz)	230V (50/60Hz)
100-125V AC	200-250V AC
2	2
1	1
7.9" x 6.1" x 5.8" 200 x 154 x 148 mm	11.5" x 9.5" x 6.6" 291 x 241 x 168 mm
2.5 lb / 5.5 kg	8.4 lb / 3.8 kg
no	no
no	no
no	no
60A	125A
60A	125A
n.a.	n.a.
n.a.	n.a.
no	no
0-10 sec (adjustable)	0-10 sec (adjustable)

0-10 sec (adjustable)	0-10 sec (adjustable)
n.a.	n.a.
40A	125A
60A	n.a.
no, system dependent	no, system dependent
7 W	7 W
0 W	0 W

-23°F to 140°F (-31°C to 60°C)

-13°F to 158°F (-25°C to 70°C) (may not meet the specified tolerances)

-76°F to 176°F -76 (-60°C to 80°C) (-60°

-76°F to 176°F (-60°C to 80°C)

maximum 95%, non condensing

switch on 12-22 ms / switch off 4-19 ms

no no

0.5-10 mm²/AWG 20-7 0.5-10 mm²/AWG 20-7

IP55 IP55



BATTERIES

MLI Ultra Lithium Ion Batteries



66

Top quality Lithium Ion batteries. High capacity and specifically developed for extremely short charging time. Equipped with various functions including a Battery Management System and MasterBus® communication.

MVG Gel Series



68

Ideal as service battery and for cyclic use. For medium to large 12V and 24V systems with a high number of charging and discharging cycles. Charges very quickly.

MVSV 2 Volt Gel Series



69

Robust Gel batteries designed for large systems and intensive use. Charge quickly and are extremely durable. Suitable for horizontal and vertical placement and problem-free deep discharge.



BATTERIES

AGM Series



70

The excellent starter function makes this battery an ideal replacement for traditional open batteries. Also suitable for light cyclic use.

AGM Slimline Series



Universal and very slim battery with exceptionally small footprint. Saves up to 15%

in volume and weight.

AGM 6 Volt Series



70

Alternative solution regarding placement and size for composing high capacity 12/24/48V battery sets.

Battery Terminals and Covers



71

Your battery set is not complete without a proper connection with the electrical onboard system. Mastervolt supplies battery terminals, which combined with the correct covers, connect your batteries safely.



Professional boaters rely on Mastervolt® batteries to power through difficult applications in tough environments.

62 BATTERIES mastervolt.com

Mastervolt® Batteries:

The right choice for power storage

Mastervolt makes selecting the right battery simple. Whether you choose a low priced battery such as the AGM or an innovative and technologically advanced Lithium Ion (LiFePO4) battery, Mastervolt has the right battery for every application.


Mastervolt has divided its entire battery range of 36 types into seven series and five different battery technologies. Each series has its specific benefits.

All Mastervolt batteries offer you these advantages:

- · Maintenance-free
- · Built for safety—no gassing
- · Easy to install
- Designed for cyclic use (charge/discharge)
- · Minimum self-discharge
- Two-year warranty

Issues to take into account:

- Determining the correct battery capacity for your new battery/ batteries is very important. For support and more information see mastervolt.com/batteries.
- Choosing the right battery charger guarantees the maximum lifespan for your batteries. Mastervolt's modern 3-step+ charge technology charges your batteries safely and quickly. For more information see mastervolt.com/chargers.
- A battery monitor is the best way to make the most of your batteries. Go to mastervolt.com/batterymonitor for more information.

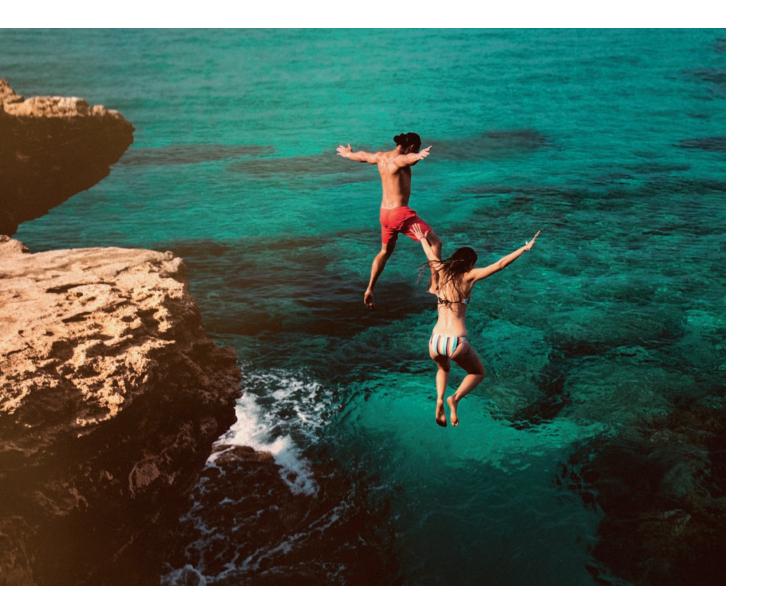



1 Lithium Ion batteries



Lithium Ion batteries have a high energy density, offering savings of up to 70% in volume and weight compared to traditional lead-acid batteries. They are perfect for cyclic applications, making over 3500 cycles with very deep (80%) discharges, effectively storing 5 times as much energy over its lifespan compared to lead-acid.

The Mastervolt MLI range is top of the line. It offers large capacity batteries designed for extreme duty cycling, with all possible features such as integrated Battery Management System (BMS) plus MasterBus®/CAN and CZone®/ NMEA 2000® communication.

2 Gel batteries



In Gel batteries, the electrolyte is absorbed by a Gel. This type of battery is entirely maintenance-free and has no gas formation with normal use. As no extra ventilation is required, Gel batteries can be installed anywhere. They are ideal as service battery and for cyclical use, and can be charged very quickly.

3 Traction batteries



This robust Gel battery is designed for regular and deep discharging (> 1000 full cycles), and is ideal for large systems that require intensive use and a very long lifespan.

AGM batteries





In AGM batteries, the electrolyte (mixture of water and sulphuric acid) is largely absorbed in glass material. This type of battery is entirely maintenance-free and there is no gas formation with normal use. Not requiring any ventilation, these batteries can be installed anywhere.

Their construction gives a very fast discharge at very high currents so AGM batteries are ideal for systems that require high currents (for instance when starting an engine). The battery poles can be unscrewed and this type of battery can be combined with every standard battery terminal.

BATTERIES mastervolt.com



Lithium Ion Batteries

Lithium Ion is the battery technology of today. Do you want to be the fastest or best performing? Do you want to save energy or burn less fuel? Do you want your investment to last longer? Do you want to be 'out there' longer without getting anxious about your energy? Then Mastervolt® MLI Ultra Lithium Ion (LiFePO4) is your choice of batteries.

A few of its outstanding features

- Space and weight savings up to 70%
- Three times the lifespan of traditional batteries (3500 cycles)
- · Extremely fast charging and discharging
- High efficiency: not wasting energy
- Safe operation
- MasterBus®, CZone and NMEA 2000® communication







Safest Lithium Ion technology available

The term Lithium Ion encompasses multiple chemistries, having slightly different compositions of materials. These differences result in variations of energy and power density, lifespan, cost and safety. As safety is our primary concern, Mastervolt chooses to use only the safest available Lithium Ion chemistry, Lithium-iron phosphate (LiFePO4).

MLI Series

Large capacity series, fully equipped for extreme cycling, like running airconditioning, pumps or electric motors for long periods of time with short intermittent charging.

The MLI series is designed to be able to enjoy all the best properties of Lithium Ion technology in the harshest conditions (high charge/discharge currents, wet environment, mechanical shock or vibrations). To do this, the MLI batteries bring two things on top of Lithium-iron phosphate cells: a sturdy, waterproof housing and the best Battery Management System (BMS). The BMS ensures optimal use of each individual cell, even during fast charge and discharge, and has integrated battery monitoring to always have the best information on the status of your battery. Last but not least, it has MasterBus/CAN and CZone/NMEA 2000® communication to the Mastervolt battery charger or to any CZone/NMEA 2000® based product to ensure the best possible recharging and lifetime of the battery.

TECH TIP

Performance Ready

The beating heart of the electrical system onboard all boats participating in the Ocean Race was formed by two Mastervolt MLI Ultra 24/6000 Lithium Ion (LiFePO4) batteries, which performed seamlessly throughout the race. Choose indestructible Mastervolt Lithium Ion batteries, like the Volvo Ocean Race boats.



Suitable for large battery banks

The MLI series is ideal for electric and hybrid applications, and can be connected in parallel unlimited. The built-in common-rail technology offers an easy series connection of multiple MLI Ultra batteries.

TECH TIP

The NEW MLI 1250 is designed to be extremely easy to install without any addiitonal components. Both 12V and 24V models are IP65 and have built-in Battery Management System (BMS) and safety features which make it a straight forward replacement for most existing lead acid batteries



Safe operation

The Mastervolt MLI series is equipped with an integrated Battery Management System (BMS) and communication through MasterBus/CAN and CZone/NMEA 2000®. Even in the harshest cycling conditions this guarantees efficient and safe operation of the battery. The MLS batteries come with an integrated automatic safety switch. Safety always comes first.



Superior performance

Mastervolt Lithium Ion (LiFePO4) batteries have a realistic lifespan of over

2000 cycles at a depth of discharge (DOD) of 80%. This means five times more energy storage than lead acid batteries thanks to features such as extremely high efficiency, the almost complete absence of self discharge and the minimal build-up of the infamous 'memory effect'.



LOW VOLUME

Weight reduction

As speed and performance are crucial aspects, a Lithium Ion (LiFePO4) battery – which takes up 70% less weight than similar lead

acid batteries – offers considerable benefits. A vessel or vehicle with a capacity of 20 kWh on board, can easily save up to 500 kg and achieve a substantially better performance.



Easy installation

The MLI series includes two integrated handles with a recess for the correct and practical installation of the cables. The battery poles are easily accessible and completely protected, so no extra isolation covers are needed. The MLS batteries make a great 'drop-in replacement' for a system with lead-acid batteries, because no system changes or additional components are required.

66 BATTERIES mastervolt.com

MLI Lithium Ion Series — CZone/ MasterBus® Compatible

CZONE°



- Top performance, heavy duty Lithium Ion batteries
- Ideal for running heavy loads for long periods and short charge times
- Saves up to 70% in space and weight
- Three times the lifespan of traditional batteries (2000 cycles)
- · High cycle efficiency
- Fast charging up to half an hour
- High discharge rate up to 2.5C
- CZone / NMEA 2000®, or MasterBus / CAN communication
- Integrated Battery Management System (BMS)
- Integrated battery monitoring (Ah consumed, state of charge)
- Series connection up to 10 batteries possible
- Waterproof electronics cabinet
- Extremely safe LiFePO4 chemistry
- Tested and certified according to UN38.3













Specifications

Specifications	MLI Ultra 12/1250	MLI Ultra 24/1250	MLI Ultra 12/3000	MLI Ultra 12/6000	MLI Ultra 24/6000
Part #	66011250	66021250	66013000	66016000	66026000
General Specifications					
Nominal battery voltage	12V	24V	12V	12V	24 V
Nominal battery capacity	100 Ah	50 Ah	200 Ah	460 Ah	230 Ah
Nominal battery energy capacity	1250 Wh	1250 Wh	3000 Wh	6000 Wh	6000 Wh
Max. charge current	100A (1 C)	50A (1 C)	230 A (1 C)	500A (1.4 C)	230 A (1 C)
Continuous discharge current	200A (2 C)	100A (2 C)	500A (2.5 C)	500A (1.4 C)	500A (2.5 C)
Peak discharge current	500A (5C) for 10s	250A (5C) for 10S	1800A (9 C) for 10s	1800A (4.5 C) for 10s	1800A (9 C) for 10s
Cycle life	3500 cycles	at 80% DOD	3500 cycles at 80% DOI	D at 77°F (25°C), max. C3 c	harge and C2 discharge
Battery monitoring	integrated	integrated	integrated	integrated	integrated
Communication	MasterBus, CZone, NMEA 2000®	MasterBus, CZone, NMEA 2000®	MasterBus, CZone, NMEA 2000®	MasterBus, CZone, NMEA 2000®	MasterBus, CZone, NMEA 2000®
Battery terminals	M6	M6	M8	M8	M8
Mounting position	upright (recommende	ed) or either long side	upright	(recommended) or either	long side
Max. outer dimensions, lxwxh (incl. terminals/grip handles)	12.9" x 6.7"x 9.3" 327 x 171 x 235 mm	12.9" x 6.7"x 9.3" 327 x 171 x 235 mm	13.4" x 7.8" x 14" 341 x 197 x 355 mm	24.5" x 7.8" x 14" 622 x 197 x 355 mm	24.5" x 7.8" x 14.0" 622 x 197 x 355 mm
Weight	30 lb / 15 kg	30 lb / 15 kg	56 lb / 25.4 kg	103.0 lb / 46.7 kg	103.0 lb / 46.7 kg
Technical Specifications					
Battery chemistry	Lithium Iron Phosphate	Lithium Iron Phosphate	Lithium Iron Phosphate	Lithium Iron Phosphate	Lithium Iron Phosphate
Protection degree	IP65	IP65	IP65 (electronics cabinet)	IP65 (electronics cabinet)	IP65 (electronics cabinet)
Parallel connection	yes, unlimited	yes, unlimited	yes, unlimited	yes, unlimited	yes, unlimited
Series connection	yes, up to 4 batteries	yes, up to 2 batteries	yes, up to 10 batteries. Systems over 48V require a separate battery box to prevent access to high voltage parts		
Protections	over voltage, under vol	tage, over temperature	over voltage, under voltage, over temperature		
Safety relay/with Bracket	n.a	n.a	Required part # 7700B-BSS (12V) / 7702B-BSS (24V) and with bracket 79007712 (12V) / 79007724 (24V)		
Safety relay controls	integrated	integrated	integrated	integrated	integrated
Integrates with Fathom®		yes, in combination with l	batteries, smart battery m	anagement and display UI	

TECH TIP

Safety Relays

Safety relays are required for proper install of Lithium Ion (LiFePO4) Batteries MLI Ultra 3000 and MLI Ultra 6000. Follow installation instructions for installing Lithium Ion Batteries. See new integrated brackets on page 65.





12V DC **7700-BSS**

24V DC **7702-BSS**

Related Products



MasterBus Displays page 84


Ultra Connection Kit NEW

With the MLI Ultra Relay and Fuse Connect Kit, you can easily install all the required safety accessories in a safe, efficient, and compact way right on top of the MLI Ultra battery

Without the need for power tools, you can get your system, safe and ready in just a few simple steps.

- Fast and easy installation.
- All necessary safety accessories in one kit*.
- Pre-assembled on an easy to mount bracket.
- Perfect fit for MLI Ultra 12/3000 and 12/6000.
- * The Class-T Fuse itself is not included in the kit. Order the right fuse rating (max. 300 A) based on the requirements of your installation.

Part # 79007712 12V, includes relay Part # 79007724 24V, includes relay

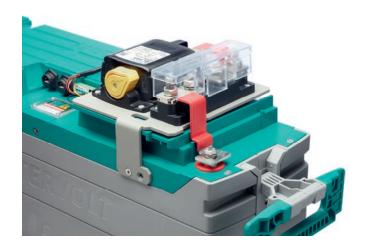





	12V	24V		
Part #	79007712	79007724		
General Specifications				
Compatibility	MLI Ultra 12/3000, 12/6000	MLI Ultra 24/6000		
Max. current	300A	300A		
Operating temperature	-13 °F to 122 °F (-25 °C to 50 °C)			
Dimensions	total height increases by 65 mm / 2.5 inch			
Weight	total weight increases by (0.0 lb) 2 kg			
Delivered with	mounting bracket, safety relay, T-fuse l	nolder, busbar conductor (2x)		
Technical Specifications				
Safety relay	12V DC - 500A	24V DC - 500A		
Max. voltage	64V	64V		

TECH TIP

Design Considerations

Only create multiple battery systems with batteries of the same type and capacity.

- If connected in series, then two units can be protected by one safety relay.
- If connected in parallel, then each unit requires its own safety relay.




Use with the following Blue Sea Systems Class-T Fuses: (not included)

Part #	Fuse Rating	Contiuous Current	5 Minutes overload current
5121-BSS	400A	300A	400A
5120-BSS	350A	260A	350A
5119-BSS	300A	225A	300A
5118-BSS	250A	185A	250A
5117-BSS	225A	170A	225A

68 BATTERIES mastervolt.com

MVG Gel Series

- Perfect service battery for medium and large 12V and 24V systems
- · Extremely long lifespan
- · No gas formation with normal use
- · Fast recharge, high charge current possible
- For intensive cycle use with a high number of charge/discharge cycles
- · Very low self discharge
- · High return on investment

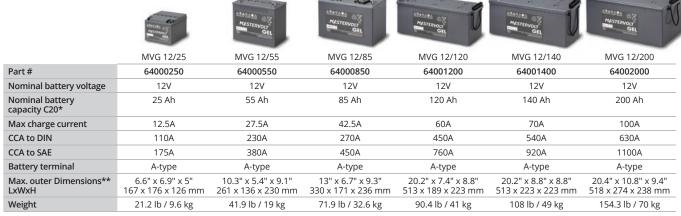

^{*} C20 = battery capacity at a discharge time of 20 hours, till 10.5V per battery. **Including terminals and grip handles

Related Products








Terminals & Covers page 71




- Ideal for large systems that require intensive use and a very long lifespan
- For intensive cycle use with a high number of charge/discharge cycles
- · Charges quickly

mastervolt.com

- Extremely sustainable battery for large installations
- · Robust build for longer lifespan
- Deep discharging without problems
- · Can be installed horizontally or vertically

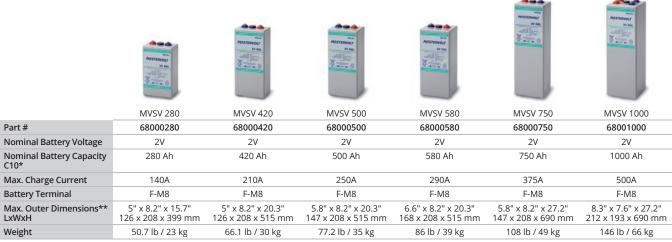

^{*} C10 = battery capacity at a discharge time of 10 hours, till 1.80V per cell. **Including terminals and grip handles

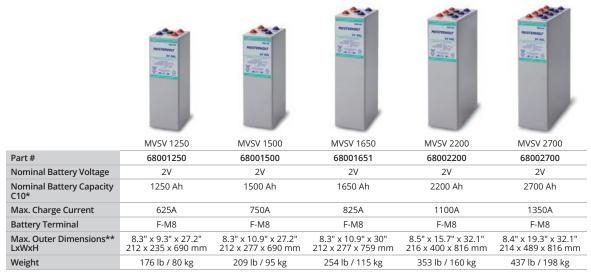

^{*} C10 = battery capacity at a discharge time of 10 hours, till 1.80V per cell. **Including terminals and grip handles

Related Products







Terminals & Covers page 71

0 BATTERIES mastervolt.com

AGM Series

- · Excellent starter function
- Perfect upgrade for flooded lead acid batteries
- Same initial power surge in an AGM 12/90 Ah as in a 180 Ah flooded lead-acid battery
- · Glass-fiber technology ensures low internal resistance
- Use of thicker plates extends lifespan
- · Can be combined with every standard battery terminal
- · Also for medium cyclical use

	Masteroog Na	PASTERNOUS NAME OF THE	MESTERVOLT AGE	MATTERVOOT HOME	MASSTERVOIT ASSESSED SO	MASTERVOLT AGASTER OLD GESCHOOL	MASTERVOOT ABABI A
	AGM 12/55 (group 24)	AGM 12/70 (group 27)	AGM 12/90 (group 31)	AGM 12/130	AGM 12/160 (group 4D)	AGM 12/225 (group 8D)	AGM 12/270 (group Super 8D)
Part #	62000550	62000700	62000900	62001300	62001600	62002250	62002700
Nominal Battery Voltage	12V	12V	12V	12V	12V	12V	12V
Nominal Battery capacity C20*	55 Ah	70 Ah	90 Ah	130 Ah	160 Ah	225 Ah	270 Ah
Max charge current	15.3A	19.5A	25.5A	36A	45A	63A	76.5A
CCA to DIN	250A	290A	360A	590A	550A	680A	750A
CCA to SAE	400A	460A	570A	940A	870A	1080A	1200A
Battery terminal	M6	M8	M8	M8	M8	M8	M8
Outside Dimensions** LxWxH	10.1" x 5.2" x 7.9" 257 x 132 x 200 mm	13.7" x 6.6" x 7" 348 x 167 x 178 mm	13" x 6.8" x 8.7" 330 x 173 x 220 mm	16.1" x 6.9" x 8.9" 408 x 176 x 228 mm	19.1" x 6.7" x 9.5" 485 x 170 x 242 mm	20.6" x 9.4" x 8.8" 522 x 240 x 224 mm	20.6" x 10.6" x 8.9" 522 x 268 x 226 mm
Weight	37.5 lb / 17 kg	46 lb / 21 kg	62 lb / 28 kg	83 lb / 37.6 kg	93 lb / 42.3 kg	140 lb / 63.5 kg	161 lb / 73 kg

^{*} C20 = battery capacity at a discharge time of 20 hours, till 10.5V per battery. **Including terminals and grip handles

AGM SlimLine Series

- Ideal universal and very slim battery; Suitable for starter functions
- · Compressed AGM technology
- Saves up to 15% in volume and weight
- Miniscule footprint; 2x 200 Ah for a 200 Ah battery footprint
- · Convenient M6 connections



	AGM-SL 12/150	AGM-SL 12/200
Part #	63001500	63001851
Nominal Battery Voltage	12V	12V
Nominal Battery capacity C20*	150 Ah	200 Ah
Max charge current	43A	53A
CCA to DIN	490A	580A
CCA to SAE	790A	930A
Battery terminal	M6	M6
Max. outer Dimensions** LxWxH	22" x 4.3" x 11" 560 x 110 x 280 mm	22" x 5" x 11" 560 x 126 x 280 mm
Weight	89 lb / 40.5 kg	113 lb / 51.2 kg

^{*} C20 = battery capacity at a discharge time of 20 hours, till 10.5V per battery.

AGM 6 Volt Series

- · Offers an alternative solution in placement and dimensioning
- Easy configuration of 12/24/48V battery banks, with high capacity
- · Double pole for easy installation
- · No gas formation with normal use
- · Can be combined with every standard battery terminal





	AGM 6/260	AGM 6/400		
Part #	61002600	61004000		
Nominal Battery Voltage	6V	6V		
Nominal battery capacity C20*	260 Ah	400 Ah		
Max charge current	72A	110A		
CCA to DIN	590 Ah	620 Ah		
CCA to SAE	1040 Ah	1100 Ah		
Battery terminal	A-type + stud M10	A-type + stud M10		
Max. outer Dimensions** LxWxH	11.6" x7.1" x11.7" 295 x180 x298 mm	11.6" x7.1" x 16.9" 295 x180 x428 mm		
Weight	78.3 lb / 35.5 kg	lb / 35.5 kg 116.8 lb / 53 kg		

^{*} C20 = battery capacity at a discharge time of 20 hours, till 10.5V per battery.

^{**}Including terminals and grip handles

^{**}Including terminals and grip handles

Battery Terminals and Covers

	Terminal Part #	Description	Cover Part #	Cover Color	Description
	68061100	with M10 thread plus	68457302	red	457N3V02, for Part #'s 68061100 & 68061300
	68061300	with M12 thread plus			
	68061200	with M10 thread min	68457314	black	457N3V14, for Part #'s 68061200 & 68061400
	68061400	with M12 thread min			


Related Products



Battery Monitors page 97




FATHOM INTEGRATED SYSTEMS

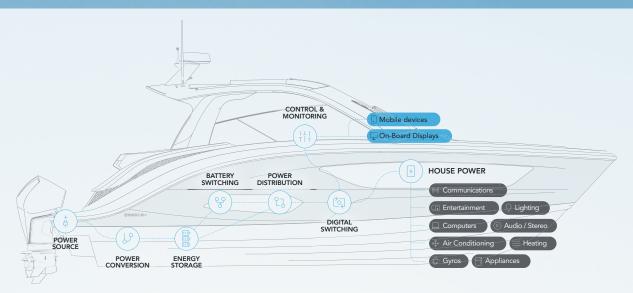



FATHOM INTEGRATED SYSTEMS

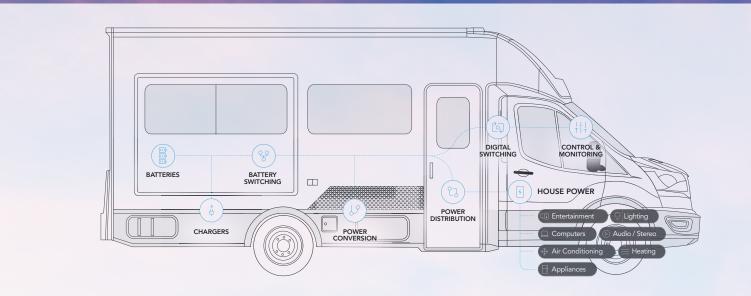



Powered by






Advanced Power Management Systems

The Fathom $^{\rm @}$ e-power system delivers maximum efficiency, flexibility and convenience for our partners.

With the Fathom system, you get the performance of all the top brands, with the convenience of a single source for service and support of the entire system.

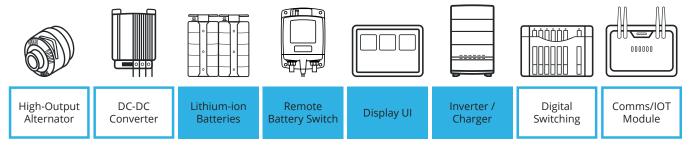



Eliminates power supply anxiety

New Fathom e-power is a complete lithium-ion power management system that delivers unprecedented power with advanced controls and monitoring for extended usage.

Advanced digital controls

Manage and monitor power with intuitive displays.

- Track battery status always know "time to empty"
- Monitor power consumption from appliances
- Receive alerts and guides for optimal recharging

Peace of mind with peace and quiet

The Fathom system eliminates the noise, fumes and hassles of a generator while delivering improved capacity and capabilities for power sources.



Scalable system design

Create a system to fit a variety of needs:

- Premium components from the world's leading brands
- Optional add-ons and upgrade choices



DIGITAL CONTROL & MONITORING

EasyView 5 MasterBus® Display



84


The EasyView 5 features a sharp, waterproof display which is clearly readable in daylight. Thanks to the color touchscreen and multi-language menu, the display is a pleasure to operate. Easily customizable favorite pages show all relevant system information at a glance.

MasterBus Network Components



86

Basic components of a MasterBus network, used for all Mastervolt® products. This system is perfectly suited for the integration of digital switching with the power electronics from Mastervolt.

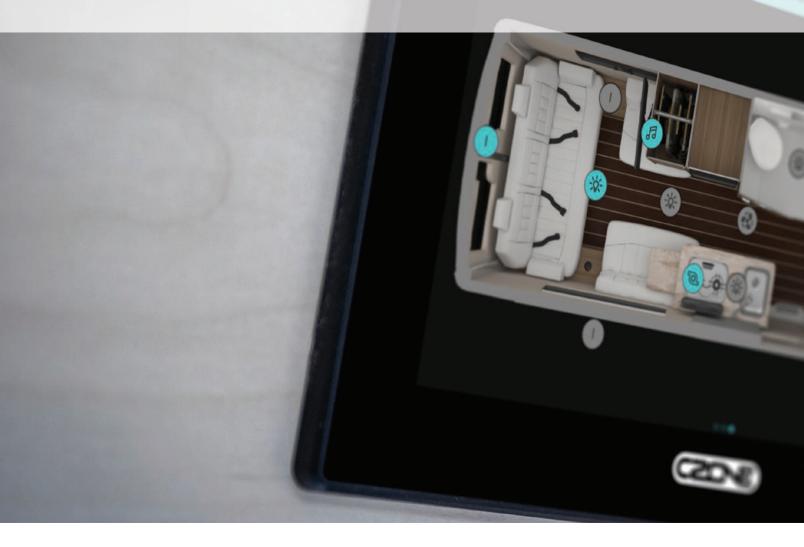

DIGITAL CONTROL & MONITORING

MasterBus Interfaces



The wide range of interfaces increases the versatility of your MasterBus network. Allows connection of multiple components to efficiently distribute information to or from your MasterBus network.

MasterBus Accessories





Extra components for building and maintaining your MasterBus network.

Digital Control & Monitoring



See CZone® spread for more information.

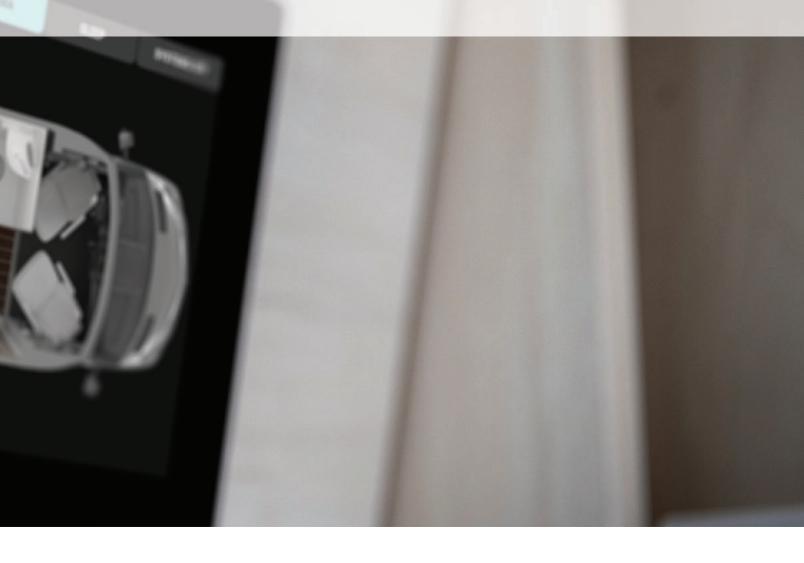

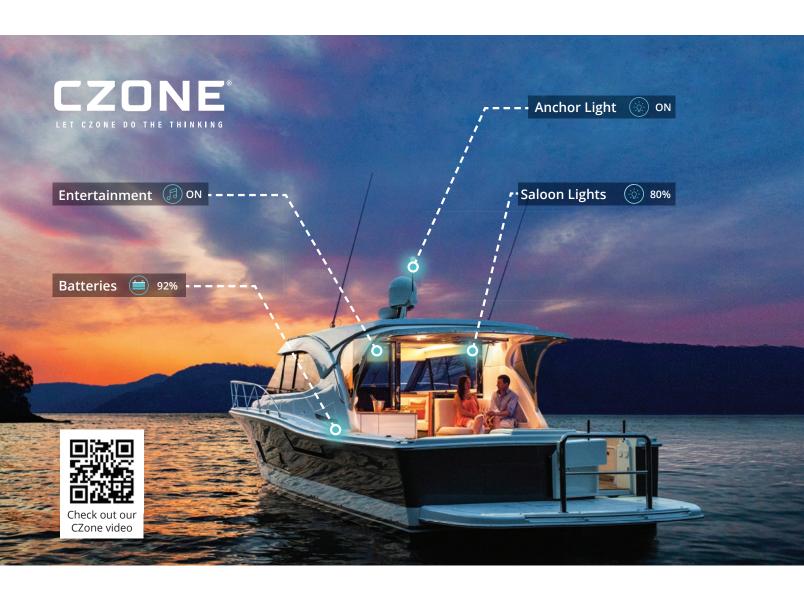

CZone Digital Control and Monitoring

CZone digital control and monitoring simplifies installation of electrical systems through the replacement of complicated, cumbersome traditional wiring. CZone is perfect for Marine and Mobile applications and replaces switch and fuse panels with networked digital interfaces providing ultimate control of onboard electrical systems.

With one touch, CZone's intelligent management simplifies operation by combining multiple circuits through Mode selection and offers effortless Monitoring oversight of key systems and components while retaining advanced Control of specific circuits and functions.

CZone can take care of all the little things, leaving more time for the user to focus on what they value. Whether you are preparing the boat for the evening's entertaining, hitting the open road away from stable power, or focusing on getting the job done, let CZone do the thinking.

Simplicity

CZone simplifies your boat or vehicle's onboard electrical system making it easier and more enjoyable.

Innovation

CZone offers system-wide functionality of your onboard systems onto a single screen or wireless device, while offering industry leading integration with suppliers from marine navigation displays, power storage and generation, and appliances like air-conditioning and more.

Reliability

CZone has proven durability, with over 10 years of installations in harsh marine environments through over 200 dedicated boat builders and technical installers.

Modes

Modes offer a predefined system state at a single touch. Modes will turn on or off specified circuits based on the user's preference and the mode of operation required.

Modes can introduce logic to handle functions based specifically for that mode of operation, whether it be integrated components like generator auto-start, or varied lighting configurations. If it needs power, Modes can take care of it in a single function.



Complete Control

CZone offers leading system control of onboard systems, from Modes selection that transforms the entire system at a single touch, wirelessly via iPad or Keyfob, or remotely via satellite or data networks. Full direct control is accessible using intuitive touch screen interfaces or through integrated marine Chartplotter & Fishfinder displays, or programmable digital switches for individual or group functions.

Monitoring & System Alarms

CZone digital control and monitoring offers peace of mind by consolidating system information and presenting alarms when things aren't right. Monitor tank level senders, gas or temperature sensors, low power source voltage or reversed polarity. CZone's advanced monitoring ability means no irregularity in the system goes by without you knowing about it. Keep alerted to major system events with onboard alarm notifications.






The Fully Integrated System



CZone and Mastervolt $^\circ$ now work together on a common network to simplify the operation of your vessel

For years, CZone has operated on a dedicated network, and Mastervolt has operated on a separate network (MasterBus®). The two networks could only be joined through a bridge interface that had to be purchased and installed separately. Now, the two technologies are coming together to operate on a single common network. This advanced integration allows for a single user interface and shared configuration files that simplify programming and installation. Now you can control and monitor all AC and DC loads, as well as the power conversion system from a single source.

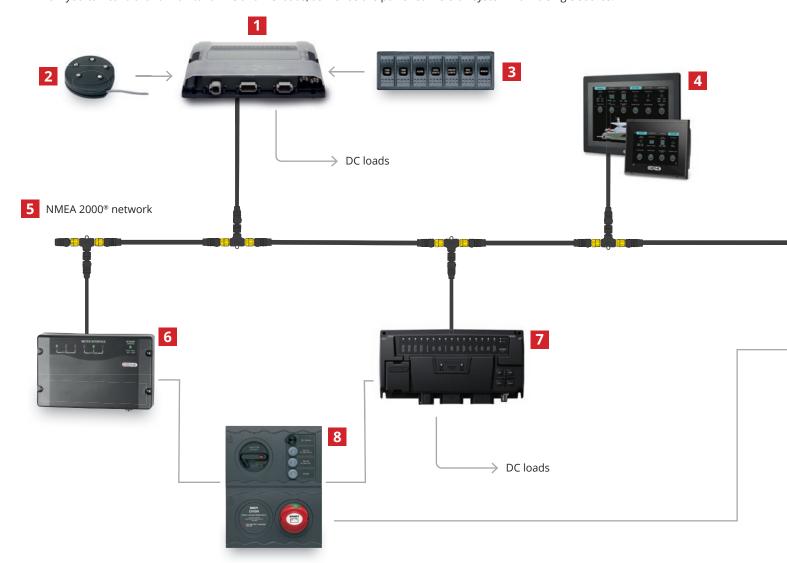

CZONE

- 1 Combination Output Interface (COI)
- 2 Ultrasonic tank sender
- 3 Switch cluster
- 4 Displays
- 5 NMEA 2000® network


- 6 Meter Interface
- 7 Control X
- 8 Battery distribution panel




CZone Ready Products

The following products have been updated to be compatible with CZone, NMEA 2000® and MasterBus.

CombiMaster® Inverter/Charger p.14
ChargeMaster Plus Battery Charger p.40
Mac Plus 48V DC-DC Converters p.50
MLI Ultra Batteries p.66
MasterShunt 500 CZone p.86

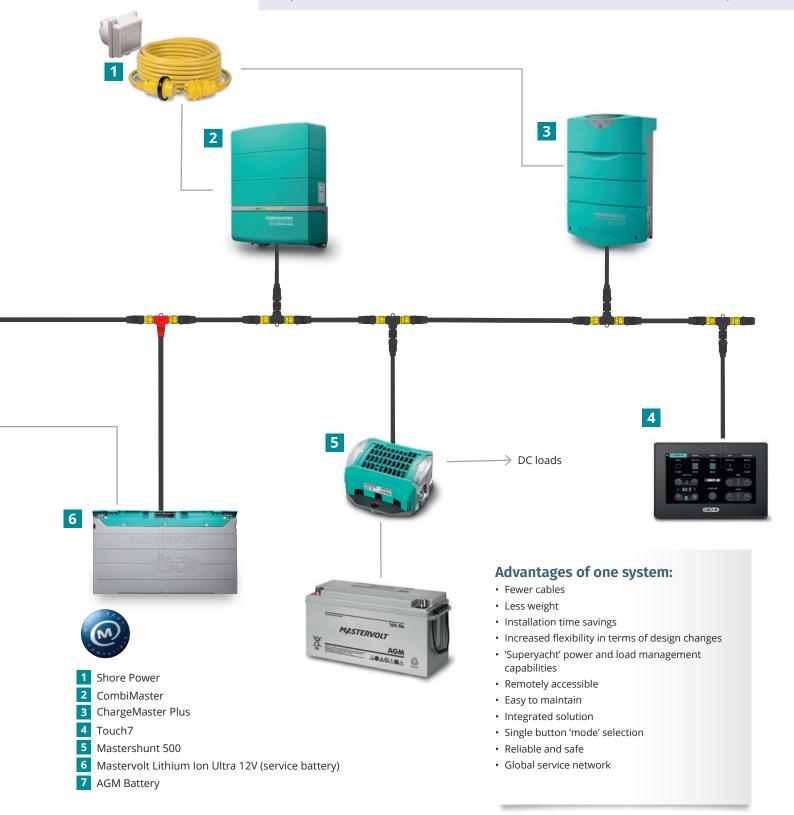

The intelligent simplicity of MasterBus®



As owners demand high levels of onboard luxury and comfort, professional and recreational applications need to carry more equipment which in turn takes up more space. This makes it all the more essential to intelligently install equipment in the available space - and that is where the MasterBus communication network of Mastervolt® comes in.

The wide range of interfaces and modules allows you to connect any equipment you wish to your MasterBus system and manage, monitor or operate it locally, centrally or even from your home. The galvanic isolation of the MasterBus network ensures a safe and stable network.

Professional Perspective

MasterBus also makes life easier for designers, builders and installers of power systems with less material, less work, less fuss and an easy testing method. Additionally, it is available in ten languages and offers the same user interface for all (Mastervolt) products, such as battery chargers, inverters, Combis, batteries or other devices. All control panels have an identical layout, with or without PC software.

Easy Maintenance

Replacing a component can often lead to complex configuration problems. Not with Mastervolt. The MasterBus network 'recognizes' any replacement directly and automatically asks whether you want to keep the same or change your configuration. You stay well informed and with everything under control.







MasterBus® Displays:

Monitor & control your MasterBus network





Fast and clear information about your onboard electrical system is vital. Usually multiple panels are required to read the details of an expansive electrical system, and the interpretation of these panels and how they relate to one another is left to the user. Mastervolt® puts an end to this undesirable situation by using a clear communication platform (MasterBus) and the smart EasyView 5 display.

EasyView 5

Waterproof System Monitor with intuitive touchscreen. Controlling your Mastervolt system has never been easier!

The EasyView 5 features a sharp, waterproof display which is clearly readable in daylight. Thanks to the color touchscreen and multi-language menu, the display is a pleasure to operate. Easily customizable favorite pages show all relevant system information at a glance.

Applications

The EasyView 5 completes any MasterBus system. With its handy functionality and compact size, the EasyView is ideal for yachts, vehicles and stationary systems. Applicable in various markets such as marine, mobile (recreational and professional), infrastructure, offshore, off grid and industrial. The possibilities are endless!

Features

- · Waterproof, 'daylight readable' color display
- · Intuitive touch control
- Customizable favorite pages
- · Log book for warnings and alarms
- · Buzzer and Home button
- · Easy mounting: front mount, wall mount or retrofit
- · MasterBus powered, or 12V/24V input
- Easy updating through MasterBus and USB

Easyview 5		
Part #	77010310	
General specifications		
Power supply	MasterBus powered, or 12V/24V input	
Resolution	480 x 272 pixels	
Colour depth	16 bits	
Display/read-out	4.3 inch high contrast display with capacitive touch control	
Languages on display	ENG, NL, DE, SP, IT, FRA, FIN, SWE, DEN, NOR	
Mounting	front mount, wall mount and MasterView Easy retrofit	
Alarms	buzzer integrated	
Dimensions, hxwxd	4.4" x 5.0" x 1.7" 113 x 127 x 43 mm	
Weight	0.7 lb / 0.315 kg	
Delivered with	UV protection cover, wall mount casing, MasterBus cable	
Technical specifications		
MasterBus connection	yes	
Power consumption	< 160 mW (idle mode)	
Connections	2x MasterBus, USB, 12V/24V	
Protection degree	IP67; waterproof front	

FasyView 5



Some examples of the many possibilities:



Customize Favorites

Customize favorite pages to meet your specific needs for information and control, to show information in the most convenient way.



Adjust Parameters

Use the EasyView 5 to adjust frequently used settings, like the shore fuse or to switch on your inverter.



Modify System Settings

In the system page you will find every possible system setting.



Alarms and Logs

No surprises! The EasyView 5 helps to keep your system in top condition by assisting you with alerts. Logging of the alarms provides valuable insight in the operation of your system.

SmartRemote — MasterBus Compatible



Compact single device display

With the SmartRemote display, checking your Mastervolt or CZone® product has never been easier.

Mastervolt offers an extensive range of touch displays for both CZone and MasterBus networks. These displays offer advanced monitoring and control of multiple devices within your energy system.

The new SmartRemote display is different, in many ways:

- · Controls a single device
- Shows four important parameters of the connected device
- Allows simple settings such as enable/disable or adjusting a shore fuse setting;
- · Fun to use.

Ease of Installation

The SmartRemote display can be panel mounted or may be integrated into a Blue Sea Systems Custom 360 bezel, and fixed using the included locking ring. Connection is as easy as 1-2-3: just connect the included network cable to a CZone or MasterBus device*. In case multiple devices are present on the bus, simply detect the device you wish to monitor.

Applications

he SmartRemote completes any MasterBus or CZone system. With its handy functionality and compact size, the SmartRemote is ideal as a remote panel in entry level power systems or as a dedicated device monitor / control in larger systems. Applications include yachts, vehicles and stationary systems.



Features

- · Clear, back lit color display
- Shows essential information and basic settings for a single device
- Easy mounting, plug and play
- Blue Sea Systems Custom 360 panel compatibility
- · Bus powered—no power supply needed

	SmartRemote		
Part #	77010600		
Part # (OEM)	77010500		
Power supply	bus powered, < 160 mW (idle mode)		
Interfaces	MasterBus & CZone / NMEA 2000®		
Resolution	320 x 240 pixels - 16 bits color		
Display	2.8 inch		
Mounting	panel mount (cutout: Ø 52 mm, 4 screws included) – Blue sea 360 panel mount		
Dimensions, hxwxd	2.8" x 2.8" x 1.16" - Ø 2" 72 x 72 x 29.4 mm - Ø 52 mm		
Weight	0.16 lb / 0.075 kg		
Delivered with	MasterBus cable, CZone-MasterBus drop cable 1m, user's manual		
Protection degree	IP20		

^{*} The SmartRemote currently supports the CombiMaster®, MLI, ChargeMaster Plus and MasterShunt

MasterBus® Network Components

MasterShunt 500

MasterShunt is the heart of every battery powered energy system. This integrated battery monitor shares information about the battery bank with other MasterBus, CZone or NMEA 2000® enabled devices such as battery chargers, inverter/chargers, and displays. No surprises: allowing complete automation of your system, MasterShunt improves comfort, prolongs battery life and extends your runtime.



The MasterShunt 500 provides all information needed for monitoring your battery bank and control of your system, such as voltage, current, state of charge and time remaining. All information is made available to the system by a single MasterBus or CZone cable. Extremely accurate measurement of current flow over state of charge enables the MasterShunt to precisely determine the time remaining.

Programmable events and an integrated real time clock make it possible to fully automate your system. Examples are to start your generator automatically when the battery bank is low (or just delaying at night!), or to automatically generate a warning at a certain depth of discharge. The proven MasterShunt design has been upgraded to obtain an even higher level of accuracy and control. Taking into account battery specific parameters, MasterShunt takes reading accuracy to a whole new level.

The MasterShunt allows freedom of choice with regards to fuse type, rating and location. The battery monitor is supplied with an internal bus bar, to be used in situations where an external fuse holder is selected. In case the MasterShunt is installed close to the battery, the bus bar may be replaced by either an ANL type or Class T main fuse, saving both space and cost.

Master Struttle 300	
77020115	

Part #	77020115		
Dimensions (HxWxD)	5.9" x 5.9" x 2.5" (150 x 150 x 65 mm)		
Weight	1.54 lb / 0.7 kg		
Battery types	Gel, AGM, flooded, Lithium Ion		
Battery voltage	12V, 24V or 48V DC		
Current	300A continuously, 400A for 10 minutes, 500A for 5 minutes, and 600A for 2 minutes		
MasterBus powering	yes, includes Smart MasterBus Powering*		
Idle consumption	23 mA (normal operation), <1 mA (power saving, MasterBus off)		
System functionality	alarm, timers, auto start/stop for the generator		
System information	e.g. time remaining, voltage, current, state of charge		
Programmable alarms	warning low voltage, warning low state of charge, high voltage		
Protection degree	IP21		
Main fuse	Bus bar included in MasterShunt, Class T fuse or ANL fuse to be ordered separately		
Delivered with	MasterShunt, temperature sensor, MasterBus terminator, isolation cover for DC connections, CZone-MasterBus drop cable		

^{*} Switched off for CZone or NMEA 2000® communication












Features

- · MasterBus, CZone and NMEA 2000® communication
- Fits in a CZone system including setup tools and configuration file
- · Digital shunt providing the energy system with extensive information and historical
- Very accurate and reliable determination of State of Charge (SOC)
- · Service mode prevents memory loss during system maintenance
- Realistic and precise indication of the time remaining
- · Smart MasterBus powering mode reduces idle consumption to a bare minimum
- For higher current, multiple MasterShunt models may be installed in parallel
- · Straight forward, easy to install
- Freedom of choice for fuse type, rating and location. Suitable for T-fuse and ANL-fuse (to be ordered separately)
- · Robust housing with isolation of the DC connections



MasterBus® Interfaces



Mastervolt® offers a wide range of interfaces to increase the versatility of your MasterBus network. Connect multiple components to distribute information to your MasterBus products or connect products that require information from the MasterBus network, such as a NMEA 2000® or Modbus network, and vice versa.

All interfaces (and modules) can be installed in various ways, from DIN rails to surface mounting. Available in ten languages: English, Dutch, German, French, Spanish, Italian, Norwegian, Swedish, Finnish and Danish.



MasterBus CANopen Interface

The MasterBus CANopen Interface facilitates transparent, 2-way communication between MasterBus and the CANopen standard, which is adopted in many automotive and industrial automation applications.

Programmability: MasterAdjust conventional configuration or string-based mapping

Data communicated: all MasterBus information and control items

Part # 77032600



MasterBus AC Master Interface

By adding the AC Master Interface to your installation, you can now control vour AC Master inverter via our MasterBus communication network. The AC Master Interface is suitable for all AC Master inverters with a RJ11 serial interface (all 700 W models and up). A communication cable is included in the delivery.

Part # 7032700



Mastervolt **USB** Interface

The Mastervolt USB Interface enables you to read and configure the MasterBus/CZone® network via your PC.

Part # 77030100



MasterBus Modbus Interface

The MasterBus Modbus Interface can provide all information from the 'closed' MasterBus network for other monitoring and operating systems by means of the Modbus protocol.

Part # 77030800



MasterBus Inverter Interface

The MasterBus Inverter Interface integrates the Mastervolt Mass Sine Inverter in a MasterBus network and allows it to be operated and monitored via EasyView 5 or PC.

Part # 77030700



MasterBus NMEA 2000° Interface

The MasterBus NMEA 2000® Interface provides the MasterBus network with NMEA 2000® information and vice versa.

Part # 77031800



MasterBus Serial Interface

The MasterBus Serial Interface connects conventional Mastervolt products to MasterBus. Data becomes permanently available to allow configuration, operation and monitoring via EasyView 5 or PC. Suitable for Masterlink BTM-III, Mac and Magic DC-DC converters.

Part # 77030450



Digital Input

Connect up to four switches to the MasterBus network. Delivery includes connection cables.

Part # 77030900

Specifications for MasterBus Interfaces on page 90.





Digital AC 1x6A

Switches all AC loads, no matter where they are. Loads up to 6A can be directly switched, higher loads should be switched via an external relay.

Part # 77031500



MasterBus® Tank Level Interface

This interface converts analog sensor input signals to MasterBus data. Selectable input signals: 4-20 mA, 0-300 Ω . 8-70V DC.

Part # 77030300



Multipurpose Contact Output

This potential-free programmable contact can be customized and programmed to give your MasterBus network unprecedented possibilities. Use it, for example, to control a ventilator, or to operate a generator. Potential free contact:

NO-C-NC – 1 A/ 30 V DC

Part # 77030500



MasterBus Power Interrupter

The MasterBus Power Interrupter switches off parts of the MasterBus network. This reduces the no-load consumption and is useful if a large system will not be used for an extended period.

Part # 77031550



MasterBus Repeater

The MasterBus Repeater doubles the maximum length of your MasterBus network.

Part # 77031100



AC Power Analyser

The AC Power Analyser is a multifunctional measuring device which can visualize the AC current and AC voltage, frequency, Cos Phi and power inside the system. Can also be used as MasterBus interface for the Mass Sine Inverter series, and offers a free programmable potential-free contact. Use it to connect AC power devices such as generators or isolation transformers to the MasterBus network.

Part # 77031200



CZone® MasterBus Bridge Interface

The CZone MasterBus Bridge Interface physically connects the MasterBus and CZone networks together, enabling the two networks to communicate and act as one. This provides seamless control and monitoring of Mastervolt power electronics from CZone displays or partner products.

Part # 80-911-0072-00

Wireless Interface

Allows your iPad® to interface with an onboard digital switching system for full monitoring and control of the electrical equipment via a clear and intuitive display. The interface acts as a hub for the seamless connection between the two popular digital switching protocols of MasterBus and CZone.

Part # 80-911-0090-00 Part # 80-911-0095-00

Wireless Interface WI MasterBus Connector (required for MasterBus connection)



MasterBus Interface Specifications

2 5-pin connector) and
us cable,
ole, MasterBus
itor,
s cable, MasterBus
s cable, MasterBus
erBus cable, MasterBus
sterBus Terminator,
tor,
itor,
tor,
itor,
terminator,
itor, nual
nsion cable,
Terminator,
1

^{*}When the PC is switched on.

MasterBus® Accessories







MasterBus Communication Cable

Suitable for data traffic and powering peripheral equipment, this is the only cable you need for your MasterBus network. MasterBus compatible products come standard with two ports, while other equipment requires an interface. A DIY kit is optional.

Length	Part #	
8 in (0.2 m)	77040020	
1.5' (0.5 m)	77040050	
3' (1 m)	77040100	
10' (3 m)	77040300	

Length	Part #
20' (6 m)	77040600
33' (10 m)	77041000
49' (15 m)	77041500
82' (25 m)	77042500
328' (100 m)	77045000



MasterBus Terminator

Terminators ensure interference-free operation, prevent reflection of data signals and ensure high communication speeds.

Part # 77040000

MasterBus DIY Kit

Cut your own cables to length and finish, comprising:

- · Professional RJ45 crimping tool
- 50 MasterBus RJ45 connectors
- 50 green MasterBus RJ45 protection boots
- 100 m green MasterBus CAT5E UTP cable

Part # 77050000

Separately available:

MasterBus RJ45 Connectors

- · 8-pole
- 25 pcs

Part # 77040010

Green Isolation Caps for RJ45 Connector

• 25 pcs

Part # 77040015



Mastervolt®-CZone® Drop Cable

Adapter cable for connecting Mastervolt devices with CZone support to the CZone or NMEA 2000® network.

Length	Part #	
1.6' (0 .5m)	77060050	
3.3' (1 m)	77060100	

Length	Part #
6.6' (2 m)	77060200
16.4' (5 m)	77060500



Mastervolt-CZone Waterproof Drop Cable

Adapter cable with integrated waterproof boot for connecting MLI Ultra batteries with CZone support to the CZone or NMEA 2000® network.

Length	Part #
1.6' (0 .5m)	77061050
3.3' (1 m)	77061100
6.6' (2 m)	77061200

Li-ion Waterproof Field Installable Plug



Included with waterproof cables. For use with standard Mastervolt-CZone drop cables.

Part # 6369230060

BATTERY MANAGEMENT

BI Battery Isolators



94


Mastervolt®'s BI battery isolators are based on conventional diode technology. The diode voltage drop (ca. 0.6V) can be compensated for by adapting the output voltage of the connected charger or alternator. Mastervolt battery chargers and Alpha Pro MB charge regulators come as standard with automatic compensation for voltage drops.

Battery Mate



94

While battery isolators are conventional diode splitters, the Battery Mate's technology is electronic and includes mosfets (transistors). Its components compensate for the voltage drop and ensure that charging continues at the right voltage level, even with several battery banks. The Battery Mate is compatible with any type of alternator/battery charger, in both existing and new systems.

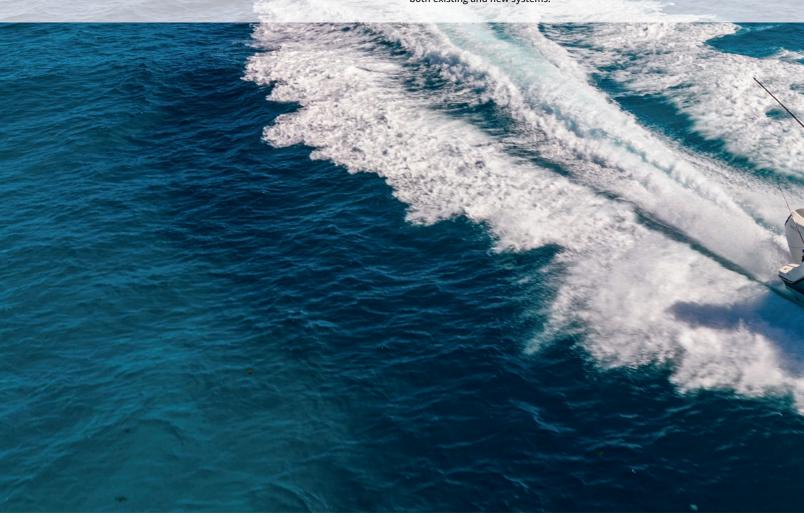

BATTERY MANAGEMENT

Charge Mate



The Charge Mate series connects both batteries during charging and keeps them isolated when discharging. The Charge Mate 1202 and 2502 are especially practical for small systems, the Charge Mate Pro provides additional functionality by limiting the charge current to the second battery to 40A or 90A.

Battery Monitoring



96

Our complete line of battery monitoring systems display performance, consumption and available capacity.



BATTERY MANAGEMENT mastervolt.com

BI Battery Isolators

Mastervolt®'s BI battery isolators are based on conventional diode technology. The diode voltage drop (ca. 0.6V) can be compensated for by adapting the output voltage of the connected charger or alternator. Mastervolt Mass battery chargers and Alpha Pro charge regulators are standardly equipped with automatic voltage drop compensation.









	BI 702-S	BI 703	BI 1202-S	BI 1203-S
Part #	83007021	83007030	83012021	83012031
Max. output charger	50A	50A	80A	80A
Max. output alternator	70A	70A	120A	120A
Compensation diode	yes	no	yes	yes
Dimensions, HxWxD	6.2" x 5.5" x 3.2" 157 x 140 x 80 mm	8.2" x 5.5" x 3.2" 207 x 140 x 80 mm	8.2" x 5.5" x 3.2" 207 x 140 x 80 mm	8.2" x 5.5" x 3.2" 207 x 140 x 80 mm
Weight	1.3 lb / 0.58 kg	2.4 lb / 1.1 kg	2.65 lb / 1.2 kg	2.9 lb / 1.3 kg
# of battery banks	2	3	2	3

Battery Mate

While BI battery isolators are conventional diode splitters, the Battery Mate's technology is electronic and includes mosfets (transistors). Its components compensate for the voltage drop and ensure that charging continues at the right voltage level, even with several battery banks. The Battery Mate is compatible with any type of alternator/battery charger, in both existing and new systems. As the voltage loss between the alternator and battery is negligible, the Battery Mate performs far better than conventional battery isolators. This ensures fast and complete charging of your batteries without having to make additional adjustments to the alternator.







	Battery Mate 1602 IG	Battery Mate 1603 IG	Battery Mate 2503 IG
Part #	83116025	83116035	83125035
Max. output charger	120A	120A	200A
Max. output alternator	160A	160A	250A
Dimensions, HxWxD	8.1" x 5.5" x 3.1" 206 x 140 x 79 mm	8.1" x 5.5" x 3.1" 206 x 140 x 79 mm	8.1" x 5.5" x 3.1" 206 x 140 x 79 mm
Weight	2.2 lb / 1 kg	2.2 lb / 1 kg	2.2 lb / 1 kg
# of battery banks	2	3	3

Charge Mate

A secondary battery is becoming increasingly common. As a second battery can prevent the main battery from depleting and being unable to start, this seems like a safe and reliable solution. The second battery, however, also has to be charged regularly. The Charge Mate series connects both batteries during charging and keeps them isolated when discharging. The Charge Mate 1202 and 2502 are especially practical for small systems, the Charge Mate Pro provides additional functionality by limiting the charge current to the second battery to 40A or 90A. The main battery is therefore charged with priority. The return current is automatically blocked and power dips of the onboard network are reduced. An emergency start function is possible by connecting an optional bypass switch.









	Charge Mate 1202	Charge Mate 2502	Charge Mate Pro 40	Charge Mate Pro 90
Part #	83301202	83302502	83304002	83309002
General Specifications				
Battery voltage	12/24V	12/24V	automatic 12/24V detection	automatic 12/24V detectio
Max. current	Bi-directional, 120A	Bi-directional, 500A	Directional, Current limiting to 40A	Directional, Current limiting to 90A; > 77°F derating power
Number of modes	n.a.	on, off, auto, start assist	on, off, auto, 150A start assist	on, off, auto, 150A start assist
Dimensions, hxwxd	3" x 1.8" x 1.8" 76 x 46 x 46 mm	3.5" x 3.1" x 3.3" 90 x 80 x 85 mm	6.2" x 5.5" x 3.1" 157 x 140 x 80 mm	6.2" x 5.5" x 3.1" 157 x 140 x 80 mm
Weight	0.3 lb / 0.125 kg	1.4 lb / 0.65 kg	1.5 lb / 0.7 kg	1.5 lb / 0.7 kg
Technical Specifications				
No-load power consumption	switch open: < 1 mA at 12/24V DC	switch open: < 1 mA at 12/24V DC	switch open: 1mA at 12V, 2mA at 24V	switch open: 1mA at 12V, 2mA at 24V
nrush current (250ms)	2000A	2000A	n.a.	n.a.
Switch on voltage	13-15V (12V) 26-30V (24V)	13-15V (12V) 26-30V (24V)	13.5V (12V) 27V (24V)	13.5V (12V) 27V (24V)
Switch on delay	5 sec.	30 sec.	5 sec.	5 sec.
Switch off voltage	< 12.75V (12V) < 25.5V (24V)	< 12.25 > 15V (12V) < 25.5> 30V (24V)	12.75V (12V) 24.5V (24V)	12.75V (12V) 24.5V (24V)
Switch off delay	no	3 minutes	2.5 sec.	2.5 sec.
Relay	electro-mechanical	electro-mechanical	electronically (MOSFETs)	electronically (MOSFETs)
Ambient temperature	-40°F to 149°F (-40°C to 65°C)	-40°F to 140°F (-40°C to 60°C)	-40°F to 148°F (-40°C to 64°C)	-40°F to 148°F (-40°C to 64°C)
Protection degree	IP21	IP21	IP66	IP66

BATTERY MANAGEMENT mastervolt.com

Mastervolt® monitoring:

A window into the life of your batteries

Unexpected flat batteries put a dampener on your pleasure. A Mastervolt battery monitoring system brings an end to nasty surprises. A clear display shows performance, consumption and available battery capacity. Management of larger, complex systems is also available. This includes monitoring and operation of multiple functions such as AC and DC power provision via the generator, mains or main engine. The choice is yours.



A choice of instruments for different needs

Measuring the actual amount of energy remaining in a battery is a complicated feat, different to simply checking the level in a water or fuel tank. Many factors influence how much energy the battery can still supply, including its age, the surrounding temperature and the intensity of the loads connected to the battery. Although a voltmeter can give a rough indication of the battery's condition, there is a more accurate and reliable way to obtain information—via one of Mastervolt's battery monitors. Available in four different models:

- BattMan Lite: An affordable battery monitor that does exactly that: providing critical information about the status of your battery bank under all circumstances. Moreover it will warn you when your battery bank is empty.
- BattMan Pro: Also displays the remaining time until your battery needs to be charged and stores special battery status events.

- SmartRemote: A single-device display and unique in many ways. It communicates with Mastervolt devices, shows key parameters, allows simple device settings and is fun to use. Checking your batteries, adjusting your shore fuse or controlling your Mastervolt charger/inverter has never been easier.
- MasterShunt + EasyView 5: MasterBus® integrated battery
 monitor collecting detailed information on the status of your
 batteries. The MasterBus remote panel with touchscreen
 controls provides information on the charge process as well as
 other system information.

TECH TIP

Warning System

A Mastervolt battery monitor can also function as an active warning system. A potential-free contact can give a signal to an acoustic alarm or even an automatic start/stop system for the generator.

Battery Monitoring Specifications









BattMan Lite

BattMan Pro

MasterShunt + Smart Remote

MasterShunt + EasyView 5

	Dattivian Lite	Dattivian F10	Smart Remote	EasyView 5
Part #	70405060	70405070	77020115 + 77010600	77020115 + 77010310
Application	Battery monitor, 12/24V DC with large, splash proof display (IP65) and power bar	Battery monitor, 12/24V DC with large, splash proof display (IP65) and power bar. Displays remaining time and stores special battery status events	Ideal as a remote panel in entry level power systems or as a dedicated device monitor / control in larger systems on yachts, vehicles or stationary systems.	The MasterShunt in combination with an EasyView 5 panel is the most advanced battery monitor you can find. Touchscreen control of all functions
General Specifications				
Number of battery outlets	2; service (fully), starter (voltage)	2; service (fully), starter (voltage)	controls a single device	one battery set per MasterShunt
Display/read-out	voltage, current, amp-hours, battery capacity in % voltage, current, amp-hours, time remaining, battery capacity in %, special battery status events voltage, current, amp-hours, charging current, output power, shore power, state of charge (battery capacity), time remaining		voltage, current, amp-hours, time remaining, battery capacity in %, inverter & charger operation, Power Sharing, special battery status events	
Dimensions, hxwxd	Ø 2.5" / 3.1" Ø 64 mm, depth 79 mm	Ø 2.5" / 3.1" Ø 64 mm, depth 79 mm	2.8" x 2.8" x 1.16" - Ø 2" 72 x 72 x 29.4 mm - Ø 52 mm	4.5" x 4.5" x 1.5" 113 x 127 x 43 mm
Dimensions shunt, hxwxd	3.3" x 1.7" x 1.4" - M8 87 x 45 x 35 mm - M8	3.3" x 1.7" x 1.4" - M8 87 x 45 x 35 mm - M8	5.9" x 5.9" x 2.5" 150 x 150 x 65 mm	5.9" x 5.9" x 2.5" 150 x 150 x 65 mm
Built-in depth	2.8" (72.5 mm)	2.8" (72.5 mm)	panel mount (cutout: Ø 52 mm, 4 screws included) - Blue Sea 360 panel mount	surface mount
Weight	0.22 lb / 0.10 kg (excl. shunt)	0.29 lb / 0.13 kg (excl. shunt)	0.16 lb / 0.075 kg	2.2 lb / 1 kg
Technical Specifications				
Max. Ah capacity	999 Ah	9999 Ah	9999 Ah	9999 Ah
Supply voltage	9-35V	9-35V	8 - 60V	8-60V
Voltage range	0-35V	0-35V	0-60V	0-60V
Current consumption (backlight off)	8 mA / 12V 6 mA / 24V	8 mA / 12V 6 mA / 24V	n.a.	32 mA / 12V 17 mA / 24V
Current consumption (backlight on)	30 mA / 12V 18 mA / 24V	30 mA / 12V 18 mA / 24V	n.a.	100 mA / 12V 50 mA / 24V
Voltage resolution	0.1V	0.01V	0.1V	0.1V
Voltage accuracy	± 0.3%	± 0.3%	± 0.6%	± 0.6%
Shunt specification	500A / 50 mV (service set)	500A / 50 mV (service set)	digital shunt	digital shunt
Current measurement range	0-500A	0-500A	0-500A	0-500A
Current accuracy	± 0.4%	± 0.4%	± 0.8%	± 0.8%
Battery alarm contact	yes, potential free	yes, potential free	yes	yes, via MasterBus alarm interface
Remaining time indication	no	yes	yes	yes
Historical data	no	yes	yes	yes
MasterBus compatible	no	no	yes	yes
Connection cable (6-wire) necessary	yes	yes	yes	no
Modular cable necessary	no	no	MasterBus cable included	MasterBus cable included
Languages on display	universal	universal	English, Dutch, French, Spanish, German, Danish, Finnish, Norwegian, Italian, Swedish	English, Dutch, French, Spanish, German, Danish, Finnish, Norwegian, Italian, Swedish









TRANSFORMERS



TRANSFORMERS



100 TRANSFORMERS mastervolt.com

Mastervolt® Transformers:

A safe connection between grid power and your onboard network

A safe connection between vessel and shore installation is an essential part of your electrical system. A galvanic electrical isolation between shore power and the on board power prevents any electrical corrosion of metal parts while keeping you earthed.

Both the unique HF technology-based Mass GI and the reliable 50 Hz transformer-based IVET series offer you complete protection against galvanic corrosion.


Select the right transformer for your system:

Lightweight Mass GI Transformer

- Ultra modern high-frequency electronic switch technology
- · Lightweight and compact
- Integrated Soft Start function
- Connect to voltages from 90V to 255V and from 45 Hz to 65 Hz
- · Units can be parallel coupled for higher capacity
- · Higher efficiency, limited heat development

IVET Heavy-duty Series

- High-quality isolation transformers without casing for self installation
- · Optional Soft Start, in synthetic casing
- Capacities of 2.5 kW to 22 kW

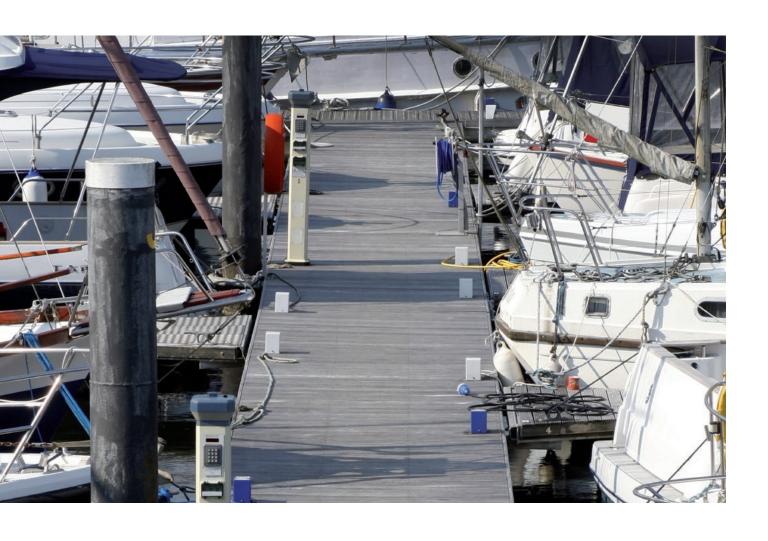

mastervolt.com TRANSFORMERS 101



Soft Start for the IVET heavy-duty series

The Soft Start automatic switch suppresses the inrush current from the transformer and prevents the fuse from blowing.

Higher capacity via parallel switching

Parallel switching of the Mass GI units increases the AC power capacity. Two 16A/3.5 kW units ensures 32A/7 kW, four units give 64A/14 kW.

Automatically adjust the grid power



Mastervolt supplies three automatic switching systems for capacities of 6, 9 and 13 kW that - combined with an IVET transformer - adjust grid power to the onboard system. As a result, a 230V/50 Hz system can easily function with an American or Caribbean AC connection. Do ensure that the frequency on board (50 or 60 Hz) is the same as the frequency of the incoming current.

Modern transformer technology: Light, silent, reliable and easy

The Mass GI is supplied with the latest high-frequency switching technology as well as Soft Start for peak loads when connecting to the grid. LED lights on the casing indicate load and overload. The transformer can be remotely controlled via a MasterBus® compatible display. The Mass GI is 75% lighter and 60% smaller compared to low frequency transformers.

Install anywhere

With its robust aluminium casing, this isolation transformer can be fitted in any position on wall or floor. No rubber mountings are necessary because the unit does not vibrate or hum. The Mass GI also features professional connections with strain relief cable glands.

TECH TIP

- Determine AC power and onboard current: 230V, 120V or both?
- Determine the capacity: maximum load with onboard power usage = amount of amps and kW.

TRANSFORMERS mastervolt.com

Isolation Transformers Specifications

102









	Mass GI 3.5	Mass GI 7	IVET 3.5	IVET 4.5			
Part #	88000355	88000705	85000350	85000450			
Input							
Input voltage	90-255V	90-255V	110/220/240V (adjustable)	110/220/240V (adjustable)			
Input frequency	45-65Hz	45-65Hz	45-65Hz	45-65Hz			
Nominal input current at 230V	16A	32A	16A	20A			
No load consumption	22 W	44 W	<10 W	<10 W			
Earth leakage protection	no	no	no	no			
Output							
Output voltage (equal to input)	90-255V, ± 5%	90-255V, ± 5%	110/220/240V, ± 5%	110/220/240V, ± 5%			
Output frequency	equal to input	equal to input	equal to input	equal to input			
Soft Start	yes	yes	option	option			
Switch off behaviour breaker	B-characteristic	B-characteristic	n.a.	n.a.			
Efficiency	>93%	>93%	>93%	>93%			
General Specifications							
Power	3500 W (up to 4 units parallel = 14 kW)	7000 W	3500 W	4500 W			
Technology	high frequency	high frequency	E-core	E-core			
Dimensions, HxWxD	13.4" x 10.3" x 5.7" 340 x 261x 144 mm	13.4" x 10.3" x 9.8" 340 x 261 x 250 mm	13" x 7.9" x 7.3" 330 x 200 x 185 mm	13" x 9.4" x 7.3" 330 x 240 x 185 mm			
Weight	13.2 lb / 6 kg	22 lb / 10 kg	66.1 lb / 30 kg	77.2 lb / 53 kg			
Ambient temperature	32°F to	104°F, derating power > 104°I	F (0°C to 40°C, derating power	> 40°C)			
Switch off at	176°F / 80°C	176°F / 80°C	n.a.	n.a.			
Cooling	variofan	variofan	natural cooling	natural cooling			
Operating humidity	max. 95%	max. 95%	max. 95%	max. 95%			
Protection degree	IP23	IP23	IP00	IP00			
MasterBus® compatible	yes	yes	no	no			
Options							
EasyView 5	option	option	n.a.	n.a.			
77010310	the key system information a	with 'daylight readable' color c at a glance. There is also a logl home button gives access to f	display and intuitive multi-lang book feature for warnings and avorite pages.	uage touchscreen to show alarms, along with a buzzer			
Soft Start 13 kW	included	included	option	option			
55003300	Automatic switch that supprefrom blowing.	Automatic switch that suppresses the inrush current from the isolation transformer to prevent the shore power fuse from blowing.					
Soft Start 22 kW	included	included	n.a.	n.a.			
55003400	Automatic switch that supprefrom blowing.	Automatic switch that suppresses the inrush current from the isolation transformer to prevent the shore power fuse from blowing.					

Transfer systems with Soft Start and automatic detection of the input voltage











	6 kVA	9 kVA	13 kVA	Soft Start 13 kVA	Soft Start 22 kVA
Part #	55010600	55010900	55011300	55003300	55003400
Voltage	120/230V	120/230V	120/230V	230V	230V
Power	6 kW	9 kW	13 kW	2.5-13 kW	13-22 kW
Max. input current	60A at 120V 30A at 230V	80A at 120V 40A at 230V	130A at 120V 70A at 230V	n.a.	n.a.
Dimensions, HxWxD	15.7" x 11.8" x 8.3" 400 x 300 x 210 mm	15.7" x 11.8" x 8.3" 400 x 300 x 210 mm	15.7" x 11.8" x 8.3" 400 x 300 x 210 mm	7.9" x 7.1" x 4.5" 200 x 180 x 115 mm	7.9" x 7.1" x 4.5" 200 x 180 x 115 mm
Weight	26.5 lb / 12 kg	27.6 lb / 12.5 kg	28.7 lb / 13 kg	2.6 lb / 1.2 kg	3.3 lb / 1.5 kg

mastervolt.com TRANSFORMERS 103













IVET 6	IVET 8	IVET 10	IVET 13	IVET 18	IVET 22
85000600	85000800	85001000	85001300	85001800	85002200
110/220/240V (adjustable)	110/220/240V (adjustable)	110/220/240V (adjustable)	110/220/240V (adjustable)	110/220/240V (adjustable)	110/220/240V (adjustable)
45-65Hz	45-65Hz	45-65Hz	45-65Hz	45-65Hz	45-65Hz
26A	35A	44A	57A	78A	96A
<10 W	<10 W	<10 W	<10 W	<10 W	<10 W
no	no	no	no	no	no
120/220/240V, ± 5%	120/220/240V, ± 5%	120/220/240V, ± 5%	120/220/240V, ± 5%	120/220/240V, ± 5%	120/220/240V, ± 5%
equal to input	equal to input	equal to input	equal to input	equal to input	equal to input
option	option	option	option	option	option
n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
>93%	>93%	>93%	>93%	>93%	>93%
6000 W	8000 W	10 kW	13 kW	18 kW	22 kW
E-core	E-core	E-core	E-core	E-core	E-core
15" x 9.5" x 8.5" 380 x 240 x 215 mm	16.9"x11"x8.3" 430 x 280 x 210 mm	16.9" x 11" x 9.5" 430 x 280 x 240 mm	19.3" x 12.6" x 9" 490 x 320 x 230 mm	19.3" x 12.6" x 10.2" 490 x 320 x 260 mm	19.3" x 12.6" x 11.4" 490 x 320 x 290 mm
110.2 lb / 50 kg	130 lb / 59 kg	165.4 lb / 75 kg	198.4 lb / 90 kg	242.5 lb / 110 kg	286.6 lb / 130 kg
	32°F to 10	04°F, derating power > 104°	F (0°C to 40°C, derating pow	er > 40°C)	
n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
natural cooling	natural cooling	natural cooling	natural cooling	natural cooling	natural cooling
max. 95%	max. 95%	max. 95%	max. 95%	max. 95%	max. 95%
IP00	IP00	IP00	IP00	IP00	IP00
no	no	no	no	no	no
n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
option	option	option	option	n.a.	n.a.
n.a.	n.a.	n.a.	option	option	option

In addition to Mastervolt® isolation transformers, we also supply ProMariner galvanic isolators, the ProSafe series.




For more information, please consult the ProMariner product catalog or promariner.com.

ProMariner®

ALTERNATORS & REGULATORS



ALTERNATORS & REGULATORS

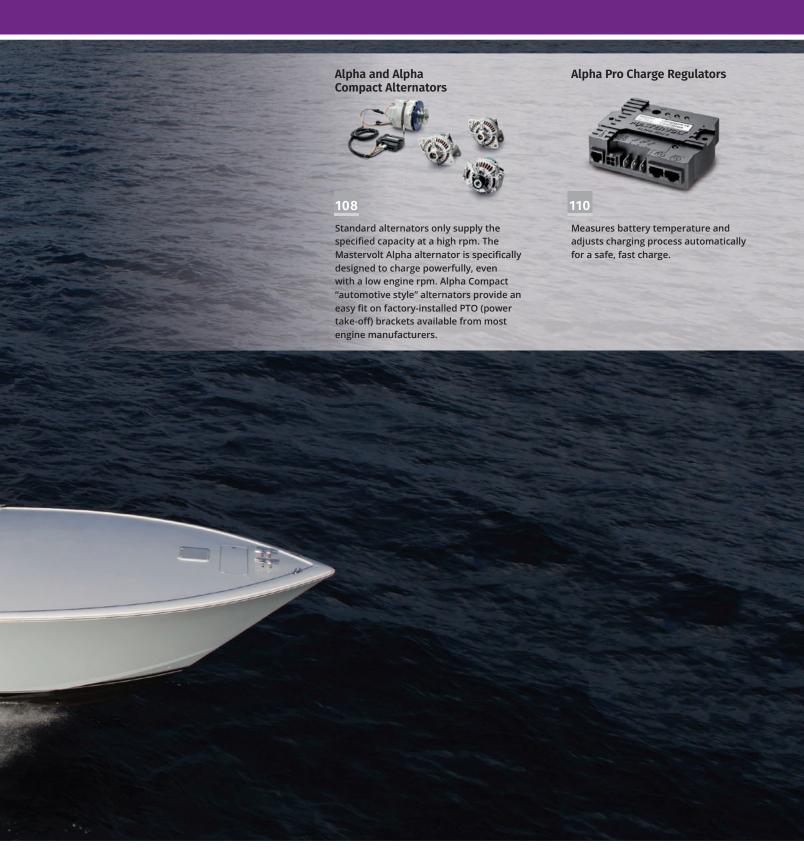

Using engines to generate electricity to replenish batteries while on the run requires alternators available from Mastervolt®.

106


Alternators and Charge Regulators:

For rapidly recharged batteries

The existing alternator on the main engine is designed to charge the starter battery. As a result the combination is not ideal for fast and full charging of other batteries, especially if you want to charge the batteries over a short time or when powering a heavy load.

There are two options to solve this issue:

Equip the standard alternator with a Mastervolt® Alpha Pro charge regulator. This charge regulator maximizes the output of alternators by regulating the alternator in a way that

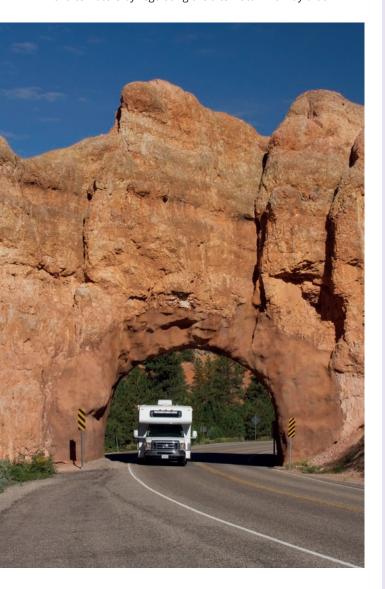

A second alternator on the main engine, combined with a larger battery bank and inverter, could be an alternative for a generator.



ensures the batteries receive the optimum charge. The proven 3-step+ charge method guarantees fast and safe charging of your batteries.

You can also choose a powerful second Mastervolt Alpha alternator with Alpha Pro charge regulator. This combination was specifically designed for charging service batteries, and allows you to charge quickly and turn off your engine when you want.

Alpha Pro Charge Regulators

- · Suitable for 12V and 24V
- · Including plug & play connection cable, an adapter cable for Bosch alternators is optional
- The Alpha Pro series is suitable for alternators up to 400A charge current
- Automatic voltage and temperature compensation
- · 'Keep alive' function for tachometer
- MasterBus compatible

The charge regulator measures the battery temperature and adjusts the charging process accordingly, resulting in a safe and fast charge. Therefore the battery is always kept in good condition.



Alpha Alternator Series

- Fast and complete charging of all batteries
- Power supply for all consumers
- · 12V and 24V versions
- 75A to 200A charge current
- As standard, delivered with Alpha Pro MB charge regulator for an optimal performance and longer-lasting batteries

Using a Battery Mate, Charge Mate or BI battery isolator in conjunction with an Alpha Alternator, makes it possible to easily charge two or three separate battery banks simultaneously.

Alpha Compact Alternator Series

Alpha Compact "automotive style" alternators provide an easy fit on factory-installed PTO (power take-off) brackets available from most engine manufacturers. If space is limited, Alpha Compact can also be used to exchange the stock alternator for a more powerful model.

- Plug and play solution, with Alpha Pro III regulator included.
- Up to 40% lighter and 25% more compact than conventional alternators
- Up to 30% lower fuel consumption
- OEM quality with optimized material composition
- · Suitable for use in high temperature areas
- · Cable and electronic parts protected against oil, moisture and dust
- Engine RPM signal
- · Wide range of accessories available
- · Models with suffix "VP" are a perfect fit for Volvo Penta engines



For all engine types

Alpha alternators are equipped with several fixations for customized alternator brackets, available from your installer or engine supplier. Some engine brands come with Mastervolt alternator brackets as an option.



High performance plug & play alternators



Compared to conventional alternators, Alpha Compact offers lower weight, smaller dimensions and reduced fuel consumption.



Alpha Pro: Easy to operate

Easy operation LEDs on the body of the charge regulator indicate the charge phase. The Alpha Pro is designed as a 'fit all' solution. Just one unit is needed for both 12V and 24V applications, with a simple selector switch to set the regulator to the right voltage. The charge regulator can also be used on any other brand of alternator that has a standard Bosch connector, using a Bosch adapter cable (optional).



MasterBus[®] Connectivity

The Alpha Pro is compatible with MasterBus, allowing easy monitoring via an EasyView touchscreen. In a MasterBus system, the voltage drop over the battery cable and the battery temperature is compensated automatically.

Wide range of accessories available



Freewheeling multigroove pulleys are available in various diameters and widths for an optimal pulley ratio and belt alignment.

Performs above 104°F (40°C)



Forced cooling by fan operation of the pulley provides a lot of power in higher temperatures, especially close to the engine.

Alpha Compact Alternators

Specifications





Alpha 14/200



Alpha 28/110



Alpha 28/150

Part #	46214120	46214200	46228110	46228150	
General Specifications					
Mounting	swivel arm	direct mounting	swivel arm	swivel arm	
Pully	no	yes	no	no	
Weight	14.8 lb / 6.7 kg	16.5 lb / 7.5 kg	16.3 lb / 7.4 kg	17.4 lb / 7.9 kg	
Rotational direction	clockwise	clockwise	clockwise	clockwise	
Galvanic isolation	non-isolated	non-isolated	non-isolated	non-isolated	
Isolated operation	yes, with optional isolation bushings				
Cooling	integrated dual fan	integrated dual fan	integrated dual fan	integrated dual fan	
Temperature sensor	integrated, RJ12 connection	integrated, RJ12 connection	integrated, RJ12 connection	integrated, RJ12 connection	
Technical Specifications					
System voltage	12V	12V	24V	24V	
Nominal current (at 6000 rpm, 77 °F)	120A	200A	110A	150A	
Charge current (at 1800 rpm, 77 °F)	70A	106A	41A	28A	
Cut-in speed	1300 rpm	1350 rpm	1400 rpm	1700 rpm	
Max. rotational speed	20000 rpm	20000 rpm	15000 rpm	16000 rpm	
Power Take Off (kW / hp)	3.4 / 4.5	5.6 / 7.6	6.2 / 8.3	8.4 / 11.4	
Max. operating temperature	248°F (120°C)	248°F (120°C)	248°F (120°C)	248°F (120°C)	
Connections					
Positive output stud	2x M8	2x M8	2x M8	2x M8	
W (rpm) signal connection	isolated fast-on	isolated fast-on	isolated fast-on	isolated fast-on	
Field current connection	Mastervolt® plug	Mastervolt plug	Mastervolt plug	Mastervolt plug	

Alpha Alternators Specifications









	Alpha 12/130	Alpha 24/75	Alpha 24/110	Alpha 24/150
Part #	48212130	48224075	48224110	48224152
Delivered with multigroove pulley	48312130	48324075		
General Specifications				
Charge Regulator	for use with alpha Pro regulator 45513000 (order separately, see pg 110)	an Alpha Pro III charge regulator comes standard with all models	an Alpha Pro III charge regulator comes standard with all models	an Alpha Pro MB charge regulator comes standard with all models
Total charge current	130A	75A	110A	150A
Cable length regulator/alternator	1.5 m, oil resistant connection cable, delivered as standard			
Belt section	2xA	2xA	2xA	2xA
Isolated from mass	yes	yes	yes	yes
Directions of revolutions	2	2	2	2
Mounting	six oʻclock	six oʻclock	six oʻclock	five to six, six o'clock & five past six
Dimensions		go to mastervolt.com/a	alternators for drawings	
Weight	22.3 lb / 10.1 kg	22.3 lb / 10.1 kg	22.3 lb / 10.1 kg	28.9 lb / 13.1 kg
Technical Specifications				
Charge voltage absorption	14.25V	28.5V	28.5V	28.5V
Charge voltage float	13.25V	26.5V	26.5V	26.5V
Pulley (double) diameter	3.5" / 89 mm	3.5" / 89 mm	3.5" / 89 mm	3.5" / 89 mm
Options				
Multigroove pulley 48400030	n.a.	n.a.	option	option









Alpha 28/200	Alpha 28/80 VP	Alpha 28/110 VP	Alpha 28/150 VP
46228203	46228082	46228112	46228152
direct mounting	swivel arm	swivel arm	swivel arm
no	yes	yes	yes
16.5lb/7.8kg	15.2 lb / 6.9 kg	16.3 lb / 7.4 kg	17.4 lb / 7.9 kg
clockwise	clockwise	clockwise	clockwise
non-isolated	non-isolated	non-isolated	non-isolated
yes, with optional isolation bushings			
integrated dual fan	integrated dual fan	integrated dual fan	integrated dual fan
integrated, RJ12 connection	integrated, RJ12 connection	integrated, RJ12 connection	integrated, RJ12 connection
24V	24V	24V	24V
200A	85A	110A	150A
50A	45A	40A	30A
1350 rpm	1400 rpm	1400 rpm	1700 rpm
20000 rpm	15000 rpm	15000 rpm	16000 rpm
8.4 / 11.4	4.8 / 6.4	6.2 / 8.3	8.4 / 11.4
248°F (120°C)	248°F (120°C)	248°F (120°C)	248°F (120°C)
2x M8	2x M8	2x M8	2x M8
isolated fast-on	isolated fast-on	isolated fast-on	isolated fast-on
Mastervolt plug	Mastervolt plug	Mastervolt plug	Mastervolt plug

Accessories

,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,								
Clutch Pul	ley							
48420110		6 ribs (Ø 49.8, W = 40.3 mm)	48420120	0	6 ribs (Ø 56.2, W = 42.8 mm)	48420130		6 ribs Ø 55, W = 36.1 mm)
48420100		8 ribs (Ø 57.4, W = 37.4 mm)	48420140		8 ribs (Ø 56, W = 38.9 mm)	48420150	()	8 ribs Ø 50, W = 49.3 mm)
Serpentin	e Pulley							
48400030	9)	6 ribs (Ø 92, W = 31 mm)	48420160		8 ribs (Ø 66.1, W = 34.6 mm)			
48420170		8 ribs (Ø 48.1, W = 39.4 mm)	48420180		2x 8 ribs (Ø 66.1, W = 68.7 mm)			
Misc. Item	ıs							
48420240		6pc Isolating Kit M8x2; M10x4	48420200		Oil Pressure Switch Isolated M10x1	48420220	9	B+ Adapter M10

Alpha Pro Charge Regulators

Specifications



Alpha Pro III				
Part #	45513000			
Part # (with 13ft harness and temperature sensor)	45513040			
General Specifications				
Link to MasterShunt	yes			
Connection to Mastervolt alternator	yes			
Connection to Bosch alternator	yes, using a Bosch adapter cable (part # 45510500)			
Cooling	fanless			
Nominal output voltage	12V / 24V			
Cable length regulator/alternator	5ft / 1.5 m oil resistant connection cable			
Connection plug regulator/alternator	Alpha/Mastervolt			
Display/read-out	LED display			
MasterBus® powering	yes			
Dimensions, hxwxd	3.5" x 4.3" x 1.2" 90 x 109 x 30 mm			
Weight	0.9 lb / 0.4 kg			
Delivered with	battery temperature sensor with 20 ft (6 m) cable			
Approvals	CE			
Technical Specifications				
Charge characteristic	IUoUo, automatic / 3-step+ for Gel/AGM/flooded/ Lithium Ion			
Charge voltage Bulk/ Absorption	default setting for AGM, Gel and Lithium Ion (adjustable)			
Absorption time	4 hours, adjustable from 2 minutes to 12 hours			
Charge voltage Float	default setting for AGM, Gel and Lithium Ion (adjustable)			
Temperature compensation	-17 mV / °F (-30 mV / °C)			
Voltage compensation	voltage drop compensation in DC cables up to 3V			
Alternator type	all alternators with negative excitation			
Field currents	up to 20 amps			
MasterBus compatible	yes			
Options				
Bosch adapter cable 45510500	option* Connection cable for any other brand of alternator that has a standard Bosch connector.			
Alternator temperature sensor 41500400	option* When used in combination with with non-Mastervolt alternators, this alternator temperature sensor may offer additional protection against over heating (see manual for instructions).			

^{*}option only for 45513000. 41500400 is included with 45513040

Benefits of a Mastervolt[®] Charge Regulator

The Alpha Pro charge regulator maximizes the output of Mastervolt Alpha alternators or any other alternator by regulating the alternator in a way that the batteries receive the optimum charge. The proven 3-step+ charge method used by all Mastervolt battery chargers guarantees fast and safe charging of your batteries.

The Alpha Pro helps to cut emissions by requiring less run time because it maximizes the power from any alternator. A battery can be charged quickly even at very low RPM, especially when connected to an Alpha series alternator. By connecting the Alpha Alternator to a Battery Mate or battery isolator, several battery banks can be charged simultaneously.

Does your tachometer sometimes indicate zero while the engine is running? The 'keep alive' function of the Alpha Pro gets rid of this problem forever.



The Alpha Pro comes standard with connection cable and battery temperature sensor.



SOLAR CHARGING



SOLAR CHARGING



SOLAR CHARGING mastervolt.com

Solar ChargeMaster:

114

Using the sun as an additional energy source

Solar cells provide power from daylight. This renewable energy source boosts your independence and also helps keep your battery in optimal condition. Mastervolt Solar ChargeMaster charge regulators maximize yield from the often very irregular supply of sunlight. Robust power electronics convert the energy from the solar panels, taking the charge status of the batteries into account.

Efficient, Reliable and Safe

Mastervolt's solar charge regulators are suitable for energy systems with system voltages of 12V, 24V and 48V (SCM60 MPPT-MB), and charge any battery type, including Mastervolt Lithium Ion (MLI) batteries. They ensure an optimal and efficient charge cycle and are highly reliable. The 3-step+ charging method guarantees an extra-long lifespan for your batteries. A MasterBus connection is available for optimal integration within the energy system.

Versatile and Flexible

Mastervolt solar charge regulators can be used flexibly to complement your energy system, or in places where no electricity is available, such as remote holiday cottages or chalets. In addition, the solar charge regulators are a perfect mobile solution for campers, special vehicles, yachts and traffic & information signs. They are also ideal for professional applications at remote petrol stations, telecom relay stations or offshore units.

Which Solar ChargeMaster is best for your application?

PWM models

The SCM20 and SCM40 PWM models are both suitable for 36-cell panels (12V systems) and 72-cell panels (24V systems). A clear integrated display, suitability for high ambient temperatures and compatibility with negative grounding. Recommended PV power ranges from 360 Wp to 1440 Wp.

MPPT models

The SCM25 MPPT is Mastervolt's smallest MPPT charge regulator. With 200 to 700 Wp in solar panels, switchable output and buzzer, this Solar ChargeMaster is very well suited to small and medium systems. The innovative MPPT technology charges your batteries up to 30% faster than PWM regulators – with the same number of panels.

The SCM60 MPPT-MB is the largest MPPT solar charge regulator in our range. With 600 to 3600 Wp in solar panels, connections for 12V, 24V and 48V battery banks and an integrated MasterBus connection, this Solar ChargeMaster is perfect for large and medium-sized systems. Besides the traditional 36-cell and 72-cell panels, the MPPT models are also ideal for the inexpensive 60-cell panels.



Features of the Solar ChargeMaster range

- · High efficiency: your batteries are charged quickly
- Capacity for solar panel configurations of up to 3600 Wp
- Suitable for AGM, Gel and flooded batteries.
- Fast and flexible setting of battery type
- Battery temperature sensor for long lifespan of your batteries
- Automatic detection 12V, 24V and 48V (SCM60 MPPT-MB)
- Switchable output
- · Noiseless operation
- Large, clear LCD display
- Fully protected against overtemperature, overload, high/low battery voltage, high/low PV voltage, short circuit and reverse polarity

Additional features of the MPPT models

- Charges up to 30% faster with the same number of solar panels
- Fewer cables, quick installation and lower losses
- Suitable for all solar panels, including the inexpensive 60-cell panels
- · Suitable for humid environments (IP23)
- Also suitable for Mastervolt Lithium Ion (MLI) batteries.
- Audible signal (SCM25 MPPT)
- Monitoring and control via MasterBus (SCM60 MPPT-MB)

Solar ChargeMaster **Specifications**









	SCM25 MPPT	SCM60 MPPT-MB	SCM20 PWM	SCM40 PWM				
Part #	131902500	131906000	131822000	131824000				
General Specifications								
Display/read-out	ch		load power, battery voltage, ry state of charge, battery setti	ng				
Dimensions, HxWxD	5.3" x 7.5" x 3.0" 135 x 190 x 75 mm	15.7" x 6.6" x 4.1" 398 x 168 x 104 mm	3.9" x 7.4" x 2.1" 98 x 189 x 2.1 mm	3.9" x 7.4" x 2.1" 98 x 189 x 2.1 mm				
Weight	2.9 lb / 1.3 kg	12.1 lb / 5.5 kg	1.1 lb / 0.5 kg	1.1 lb / 0.5 kg				
Alarms	buzzer	via MasterBus	n.a.	n.a.				
Cooling	passive	passive	passive	passive				
Protection degree	IP23	IP23	IP23	IP23				
Grounding	(-) terminal	(-) terminal	common negative grounding	common negative grounding				
Technical Specifications								
Technology	MPPT (Max. Pow	er Point Tracker)	PWM (Pulse Wi	dth Modulation)				
Temperature range (ambient temp.)	-4°F to 131°F ((-20°C to 55°C)	4 °F to 122 °F, dera (-20 °C to 50 °C, der	ting power > 104 °F ating power > 40 °C)				
Cable size	max. 10 mm² Litz wire	max. 35 mm² Litz wire	max. 16 mm² Litz wire	max. 16 mm² Litz wire				
Protections	hig	over temperature, overloa gh/low PV voltage, short circuit	d, high/low battery voltage, t, reverse polarity & HV transie					
MasterBus® communication	no	yes	no	no				
Relative humidity	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing				
Battery Charger Specifications								
System voltage (battery)	12/24V auto select	12/24/48V auto select	12/24V auto select	12/24V auto select				
Battery types	AGM, Gel, flooded, Lithium Ion (LiFePO4)	AGM, Gel, flooded, Lithium Ion (LiFePO4)	AGM, Gel, flooded,	AGM, Gel, flooded,				
Battery temperature sensor	yes	yes	optional	optional				
Lithium Ion protection	via Multipurpose Contact Output, Part # 77030500	yes, via MasterBus connection	n.a.	n.a.				
Max. charge current at 104°F (40°C)	25A	60A	20A	40A				
Switchable output (max. current)	25A	via MasterBus	20A	40A				
Energy consumption (night)	5 mA	< 1 mA	< 7 mA	< 7 mA				
Solar Input (DC) Specifications								
Nom. PV current at 104°F (40°C)	18A	50A	20A	40A				
PV start voltage (12V/24V)	15V / 27V	n.a.	n.a.	n.a.				
PV start voltage (12V/24V/48V)	n.a.	15V / 27V / 51V	n.a.	n.a.				
Nom. PV voltage (12V)	15-66V	13.2-115V	n.a.	n.a.				
Nom. PV voltage (24V)	30-66V	26.4-115V	n.a.	n.a.				
Nom. PV voltage (48V)	n.a.	52.8-115V	n.a.	n.a.				
Max. PV voltage (Tmin)	75V	145V	n.a.	n.a.				
Max. PV power (12V)	360 Wp	900 Wp	360 Wp	720 Wp				
Max. PV power (24V)	720 Wp	1800 Wp	720 Wp	1440 Wp				
Max. PV power (48V)	n.a.	3600 Wp	n.a.	n.a.				
Max. efficiency	> 98% > 98% n.a. n		n.a.					
Static MPP efficiency	99.9%	99.9%	n.a.	n.a.				
Options								
Temperature Sensors 41500500, 6M 41500800, 15M	included option	included option	option option	option option				



117

PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
131822000	108	28020700	30	35512000	17	43020600	44	48420100	104
131824000	108	28021000	30	35513000	17	44010250	44	48420110	104
131902500	108	28021500	30	35513500	17	44020120	44	48420120	104
131906000	108	28022000	30	35522000	17	44310305	40	48420130	104
21709150	35	28022500	30	35523000	17	44310505	40	48420140	104
21709200	35	28210700	29	35523500	17	44310755	40	48420150	104
21709300	35	28211000	29	35524500	17	44311005	40	48420160	104
24012000	24	28211500	29	35545000	17	44320205	40	48420170	104
24020800	24	28212500	29	36211200	19	44320305	40	48420180	104
24021002	25	28213500	29	36211201	19	44320405	40	48420200	104
24021500	24	28220700	30	36212000	19	44320605	40	48420220	104
24022500	24	28221000	30	36212001	19	44320805	40	48420240	104
24095100	24	28221500	30	38013000	12	44321105	40	55003300	98
24112000	24	28222500	30	38023500	12	45510500	106	55003400	98
24120800	24	28410700	29	38343500	12	45513000	106	55003500	56
24121500	24	28411000	29	38513000	12	45513040	106	55006000	56
24122500	24	28411500	29	38523500	12	46214120	104	55006010	56
24195100	24	28412500	29	40020156	37	46214200	104	55006015	56
25012002	25	28413500	29	40020256	37	46228082	104	55008205	56
26024000	24	28420700	30	40020506	37	46228110	104	55010600	98
28010302	29	28421000	30	40020756	37	46228112	104	55010900	98
28010502	29	28421500	30	40021006	37	46228150	104	55011300	98
28010700	29	28422500	30	40031006	37	46228152	104	55106100	56
28011000	29	28510700	29	40040256	37	46228203	104	61002600	68
28011500	29	28512000	29	40040506	37	48212090	105	61004000	68
28012000	29	28520700	30	40120756	37	48212130	105	62000550	68
28012500	29	28522000	30	40720266	37	48224075	105	62000700	68
28013500	29	35012000	18	41500400	106	48224110	105	62000900	68
28020300	30	35013000	18	41500500	12	48224150	105	62001300	68
28020302	30	35022000	18	41500700	19	48400010	105	62001600	68
28020500	30	35023000	18	41500800	12	48400020	105	62002250	68
28020502	30	35511500	17	43011000	44	48400030	104	62002700	68

PN	Page	PN	Page	PN	Page	PN	Page	PN	Page
63001500	68	70403163	93	77040100	86	81300300	50	85000600	99
63001851	68	70405060	93	77040300	86	81300400	50	85000800	99
6369230060	86	70405070	93	77040600	86	81400100	53	85001000	99
64000250	66	70405080	29	77041000	86	81400200	53	85001300	99
64000550	66	70405080	30	77041500	86	81400300	53	85001800	99
64000850	66	77010310	12	77042500	86	81400330	53	85002200	99
64001200	66	77010600	79	77045000	86	81400400	53	88000355	99
64001400	66	77010700	19	77050000	86	81400500	53	88000705	99
64002000	66	77020115	37	77060050	86	81400600	53		
66011250	64	77020200	40	77060100	86	81400700	53		
66013000	64	77030100	12	77060200	86	81400800	53		
66016000	64	77030300	84	77060500	86	81500100	52		
66021250	64	77030450	50	77061050	86	81500200	52		
66021250	65	77030500	44	77061100	86	81500300	52		
66026000	64	77030700	24	77061200	86	81500350	52		
68000280	67	77030800	82	79007712	64	81500400	52		
68000420	67	77030900	83	79007724	64	81500500	52		
68000500	67	77031100	84	80-911-0072-00	84	81500600	52		
68000580	67	77031200	24	80-911-0090-00	85	81500700	52		
68000750	67	77031500	84	80-911-0095-00	85	83007021	90		
68001000	67	77031550	84	81205100	48	83007030	90		
68001250	67	77031800	83	81205105	48	83012021	90		
68001500	67	77031850	82	81205200	48	83012031	90		
68001651	67	77032400	83	81205205	48	83116025	90		
68002200	67	77032600	82	81205300	48	83116035	90		
68002700	67	77032700	28	81205305	48	83125035	90		
68061100	69	77032900	19	81205400	48	83301202	91		
68061200	69	77040000	86	81205405	48	83302502	91		
68061300	69	77040010	86	81206205	48	83304002	91		
68061400	69	77040015	86	81206405	48	83309002	91		
7032700	82	77040020	86	81300100	50	85000350	99		
70400050	37	77040050	86	81300200	50	85000450	99		

Ingress Protection (IP) Ratings Guide


Example:

An IP65 rating can be determined using the adjacent table and example:

- The first number of the rating example,
 6, in the gray column means the enclosure is dust tight
- The second number of the rating example,
 5, in the blue column means the enclosure is protected against jets of water

The IP rating system was established by the International Electrotechnical Commission (IEC), an organization for international standards and conformity assessment. The IEC collaborates closely with the International Organization for Standardization (ISO). A complete description of the IP ratings and associated tests is found in IEC Publication 529. Although these ratings were initially developed as a way to classify enclosures, they now provide a convenient, practical way to compare levels of sealing. Many electrical products have an Ingress Protection (IP) rating which identifies the environmental factors needing consideration prior to the product's installation.

This is important when deciding when to mount products in a dry and clean environment versus a wet and/or dusty environment. The IP rating indicates the degree of protection provided. The numbers following IP represent levels of sealing and can range from no protection to full protection against dust and water. The table provides a description of the protection at each level.

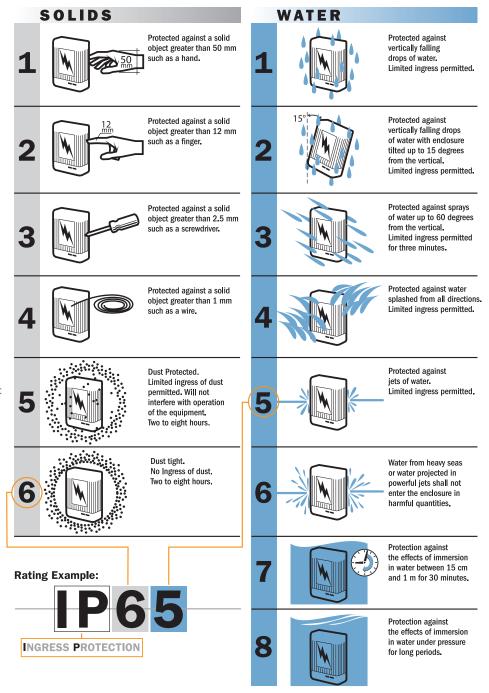







Mastervolt®

N85 W12545 Westbrook Crossing Menomonee Falls, WI 53051 USA p 800.307.6702 f 800.799.3779

New Zealand

42 Apollo Drive Rosedale, Auckland 0632 New Zealand p +64.9.415.7261 f +64.9.415.9327

The Netherlands

Snijdersbergweg 93 1105 AN Amsterdam The Netherlands p +31(0)20 34 22 100 f +31(0)20 69 71 006

mastervolt.com tech.mastervolt@oneasg.com

 $\ensuremath{\mathbb{C}}$ 2023 Navico Group. All Rights Reserved. Navico Group is a division of Brunswick Corporation.

 $\$ Reg. U.S. Pat. & Tm. Off, and $\$ common law marks. Visit www.navico.com/intellectual-property to review the global trademark rights for Navico Group.

Unauthorized copying or reproduction is a violation of applicable laws.

MAS_CAT_008_0523

FSC Details (added by printers)