











MARINE
EMERGENCY VEHICLE
INDUSTRIAL
RV




# TAKING YOU FURTHER

Navico Group is the world's leading supplier of integrated systems and products to industries ranging from marine to recreational vehicle and beyond. We offer an unmatched portfolio comprised of industry-leading brands in power management, digital control & monitoring, networked devices and marine electronics.

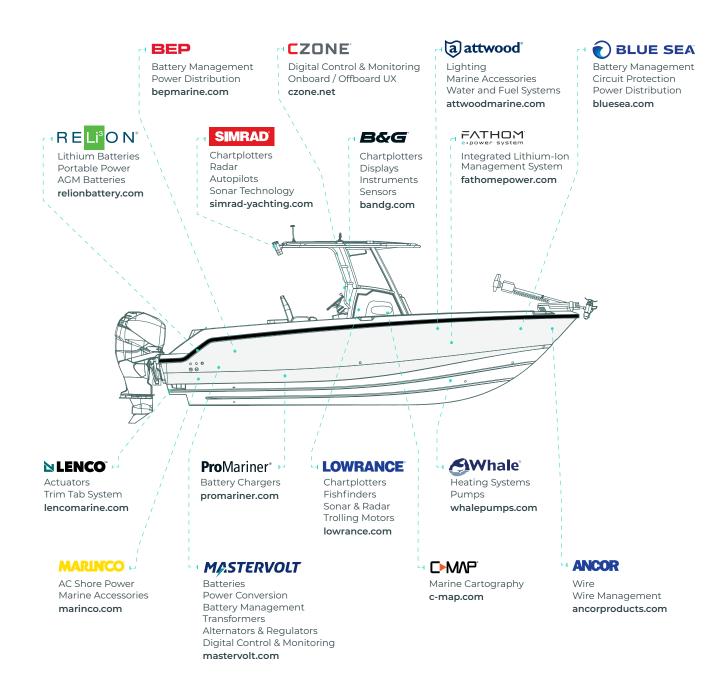

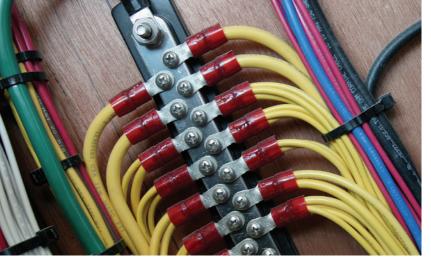

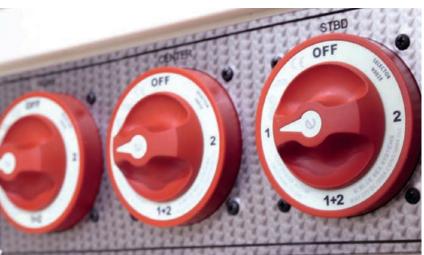





# What makes Blue Sea Systems different:

# I Founder's Vision

Blue Sea Systems was founded in 1992 based on a commitment to create innovative, high quality electrical products to improve the safety, simplicity, and reliability of boating. Since that time the range of product has expanded to over 1,000 items and distributed to customers in over 50 countries including Marine, Industrial, RV, and Specialty Vehicle markets. Products include battery chargers, battery switches, automatic charging relays, fuse blocks, busbars, meters, and both standard and custom power distribution panels. The company is committed to offering quality products that are engineered for the harsh marine environment, built to last, with a guarantee of satisfaction and industry leading technical support.

# **I** Selection

Over 1,000 electrical products are designed to work together as a fully integrated system

# I Fast Delivery

Just in time manufacturing for many products in Bellingham, Washington ensures rapid order fulfillment

## I Worldwide Access to Product

A distribution network in over 50 countries provides access to products when they are needed

## **I** Information

24-hour access to product information, selection tools, and technical articles online at bluesea.com

# I Industry Standards

Industry involvement ensures products meet ABYC, NMMA, and Coast Guard standards

# I Quality

Blue Sea Systems is committed to product quality and is managed in a manner consistent with international business practices with a robust product warranty program.

# **Table of Contents**

# Introduction

System Diagrams

# **Power Conversion & Connection**

Air Brake Compressors	18
P12 Charger	19
P12 Charger Remote	20
EV Remote Display	20
Sure Eject™	21
BatteryLink <sup>®</sup> Chargers	22
Dual USB Chargers	24
12V Socket & Plug System	25
Water-Resistant Accessory Panels	26
DeckHand Dimmers	27

















p. 27

# **Battery Management**

Manual Battery Switches	30, 36
Battery Management Panels	38
Solenoid Switches	39, 52
Low Voltage Disconnect	40, 53
Automatic Timer Disconnect	41, 53
Remote Battery Switches	43, 52
Automatic Charging Relays	46, 50, 53
Add-A-Battery Kits	48









p. 41







p. 48

# **Circuit Protection & Switches**

Fuses	56, 72
Fuse Holders	60, 72
Fuse Blocks	61, 73
Circuit Breaker Blocks	74
Circuit Breakers	75, 90
Surface Mount System	88
Switches	92









p. 74



p. 75



# **Connectors & Insulators**

BusBars	100
Terminal Blocks	103
PowerBars	104
PowerPost Connectors	106
Feed Through Connectors	106
CableCaps	108
CableClams	109



p. 100

p. 104



p. 106







p. 109

# **Power Distribution**

Waterproof & Water-Resistant	112, 113
Contura Switch Water-Resistant	112, 113
WeatherDeck® Waterproof	112, 115
360 Panel System	116
Traditional Metal	117
DC Branch Circuit Breaker	118
AC Main Circuit Breaker	122
AC Branch Circuit Breaker	124
AC RCBO Circuit Breaker	126
AC Source Selection	127
AC/DC Combination	130
Custom 360	132













p. 117

p. 122

p. 126







# Meters

Analog Meters	140, 148
M2 OLED Digital Meters	142, 148
M2 OLED Vessel Systems Monitor	142, 148
Mini OLED Meters	145, 148
Mini Clamp Multimeter	145, 148
Digital Meters	146, 148
DC Shunts	149
Temperature Sensor	149
AC Transformers	149



p. 146



p. 149



p. 149



p. 145



# **Accessories**

Floyd Bell Turbo Series Alarm	152
Insulating Back Covers	152
120V AC Dual Outlet	152
LED Indicators	153
Lockout Slides	153
Toggle Guard	153
Labels	154, 158











p. 153

CABIN LIGHTS

p. 153


p. 153

p. 154

# **Appendix & Index**

Wire Selection Chart	159
Fuse Selection Chart	160
Fuse Holder Selection Chart	161
Wiring Schematics	162
DC Discussion	164
AC Discussion	165
Part Number Index	166





p. 159


p. 162



# **Trailerable Boat System**


2 Battery Bank, 1 Engine




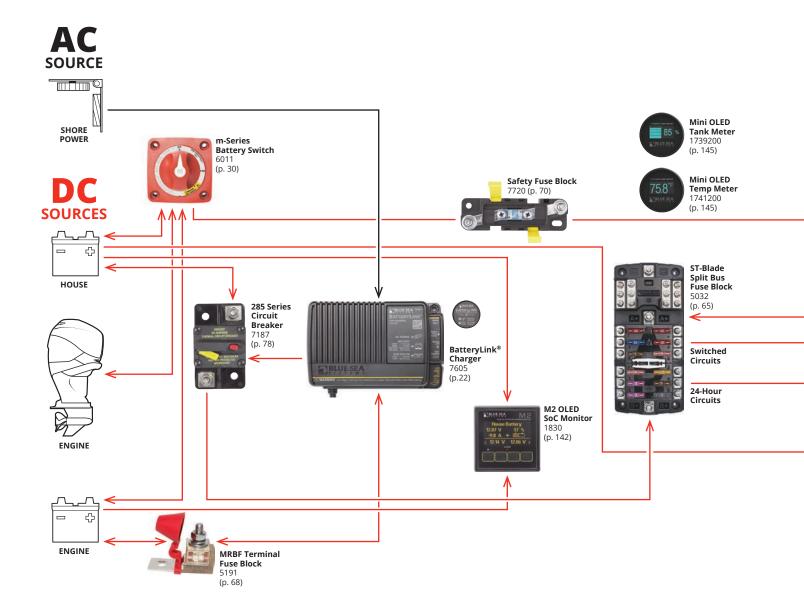

bluesea.com INTRODUCTION 7



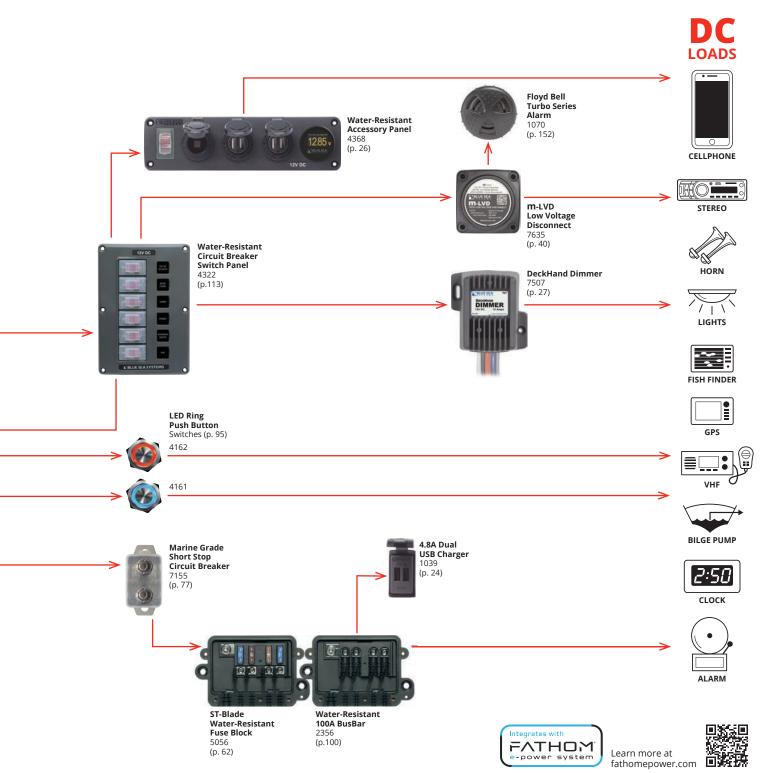

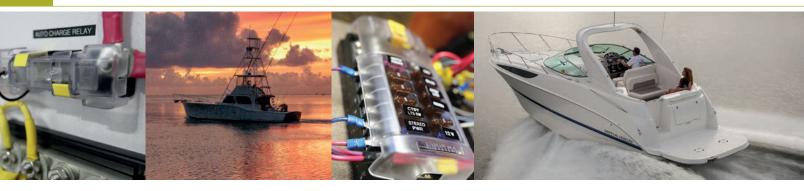


AC Current


DC Current



3 Battery Bank, 1 Engine

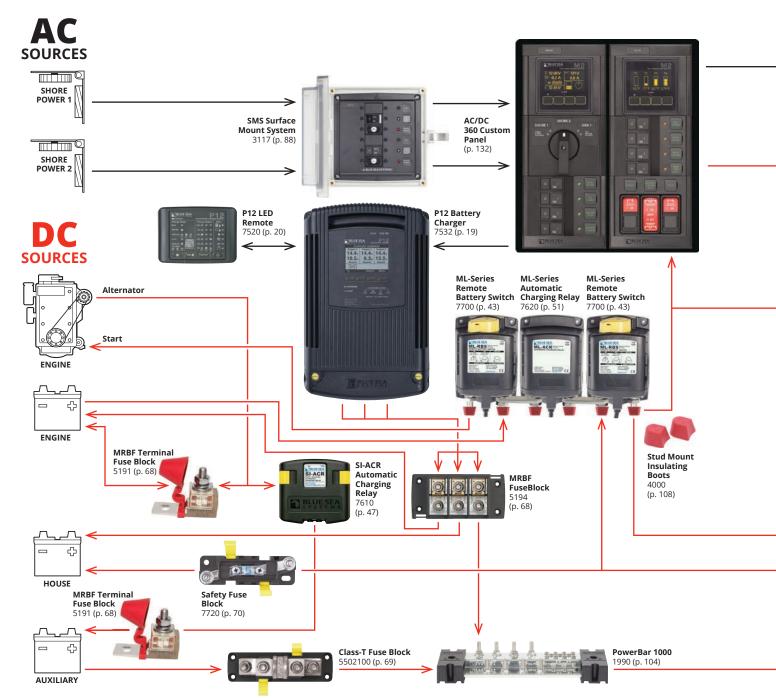



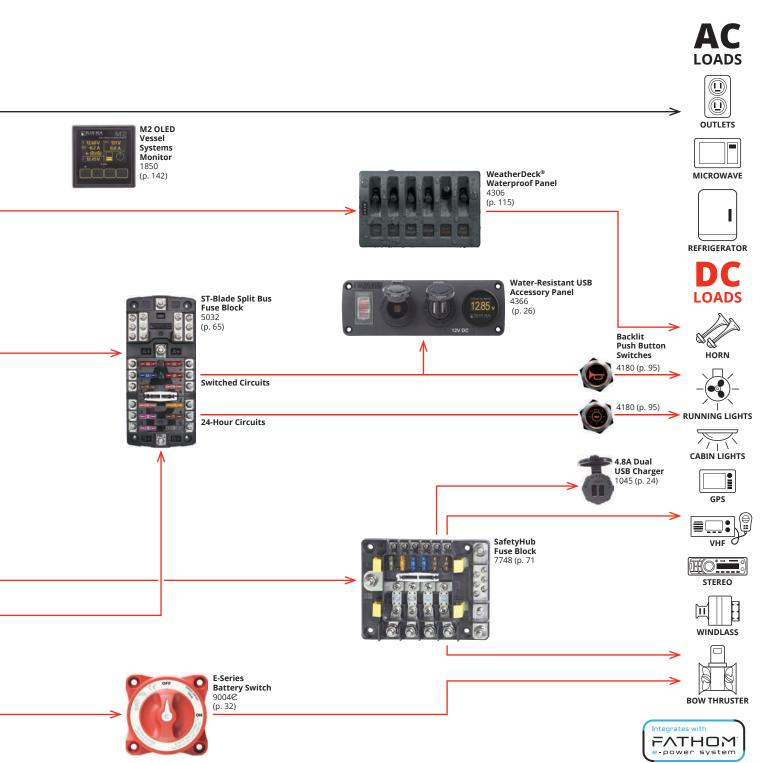





# Van System 2 Battery Bank, 1 Engine

10

AC Current > DC Current >

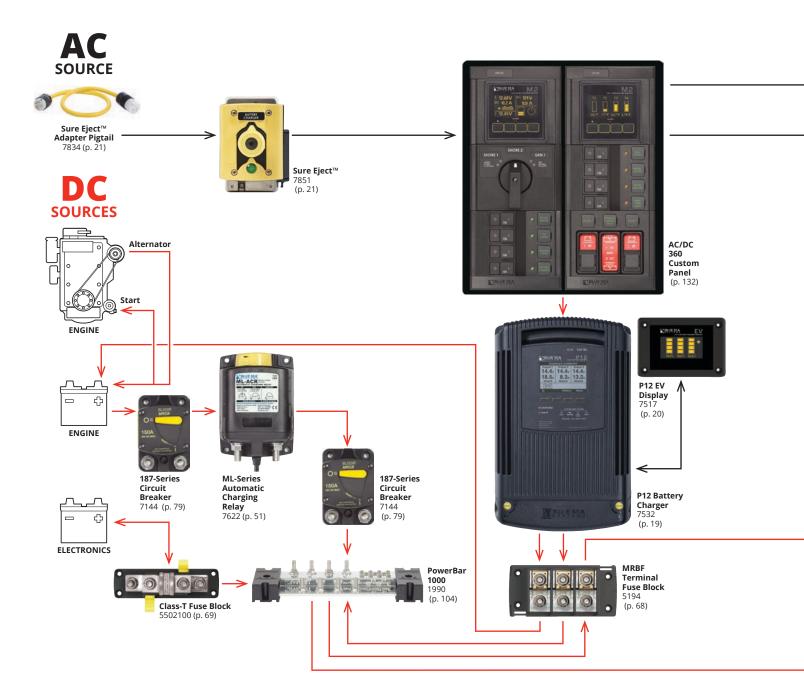



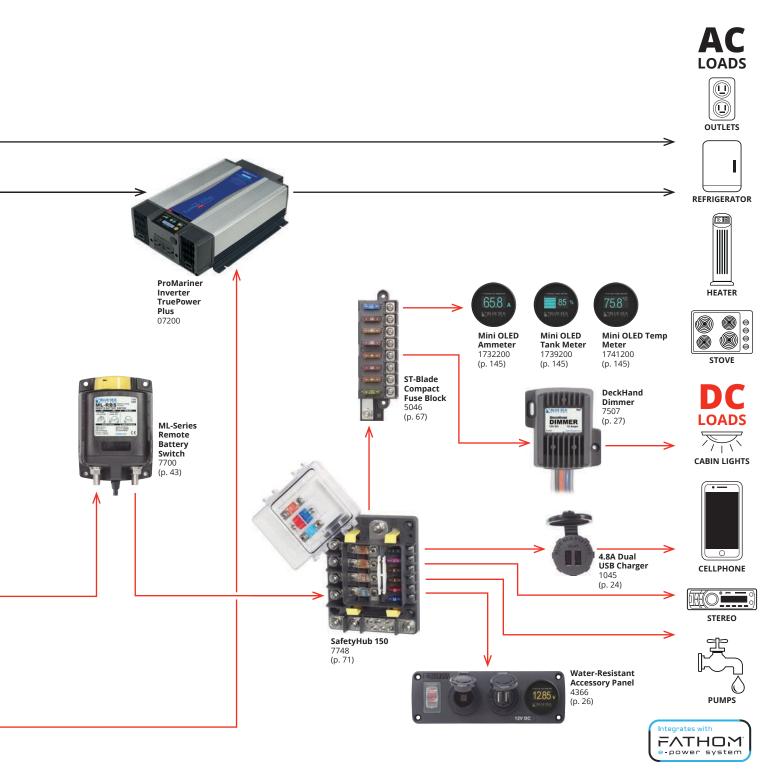




# **Interceptor/Battalion Chief Vehicle**


2 Battery Bank, 1 Engine

12



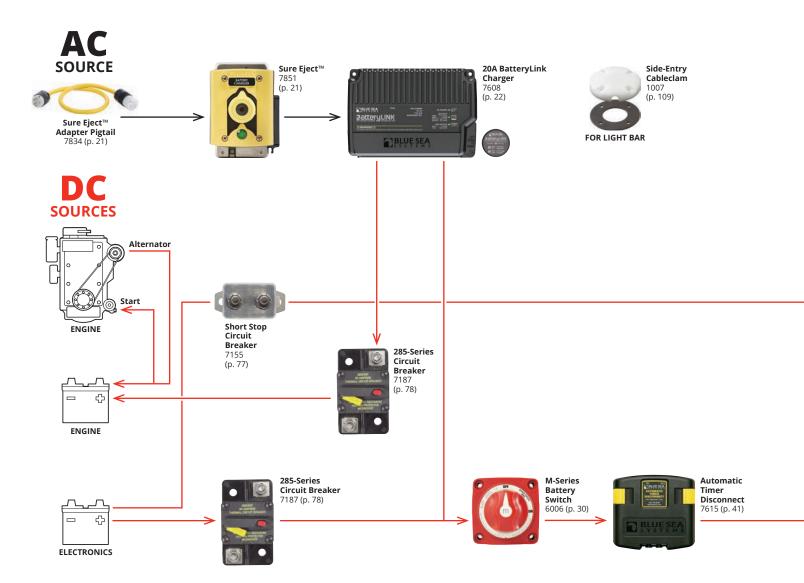




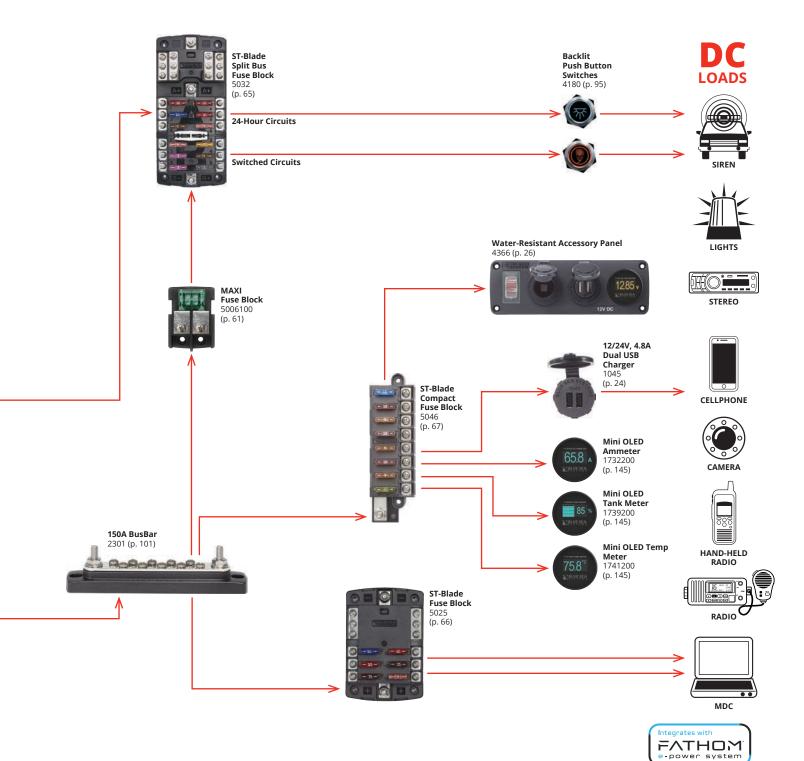




# Fire Apparatus System 2 Battery Bank, 1 Engine



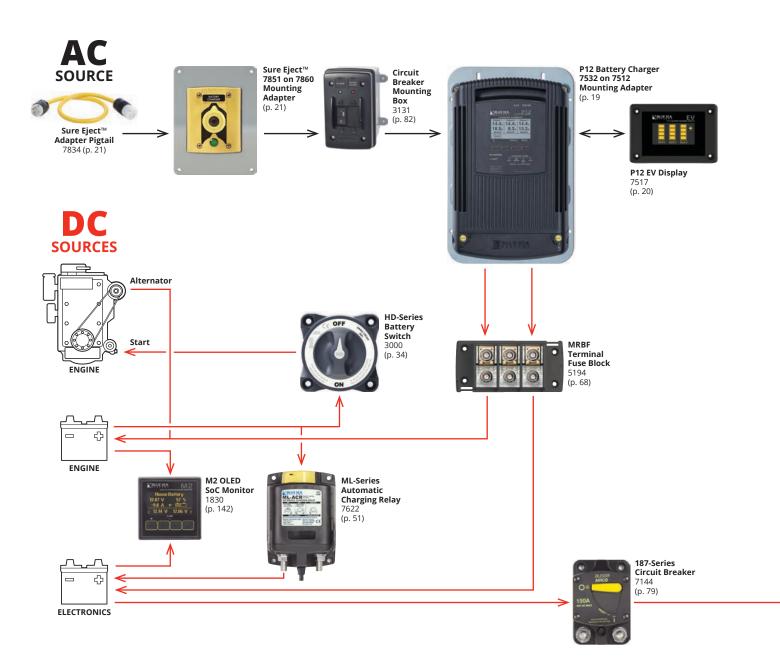



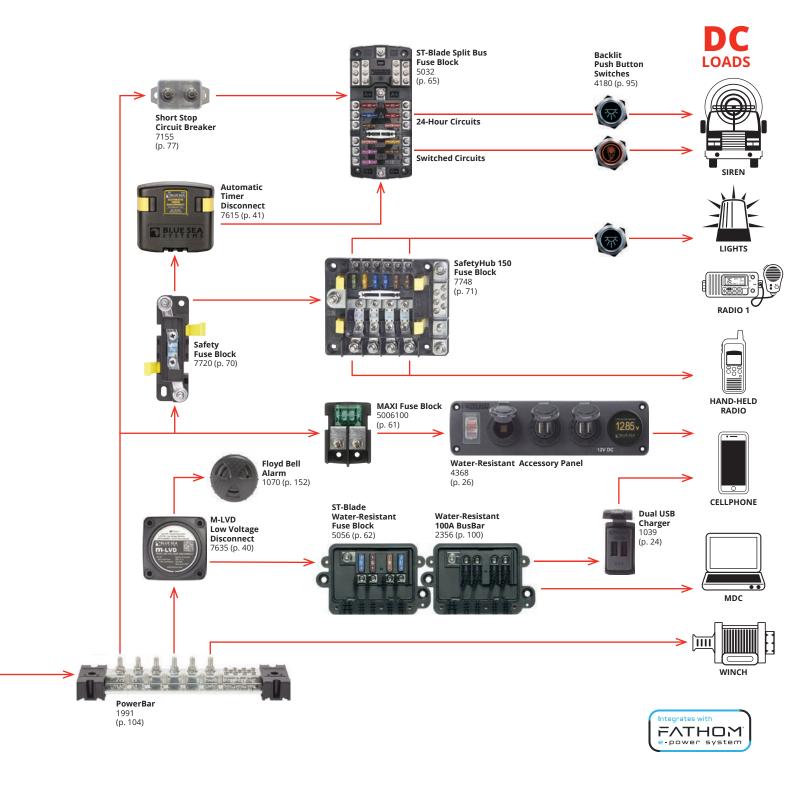

# POWER CONVERSION & CONNECTION

**Air Brake Compressors** 



18

Automatically maintains air brake system at ready status.

**P12 Battery Chargers** 



19

A four stage, three output, dry mount device designed for use in harsh environments. P12 Battery Charger EV Display and Remote

Sure Eject™

ject™ BatteryLink® Chargers



20

Works with the P12 Battery Chargers.




21

Automatic AC disconnect ejects power cords upon ignition to prevent damage.



22

Charge two batteries at or away from the dock or garage.

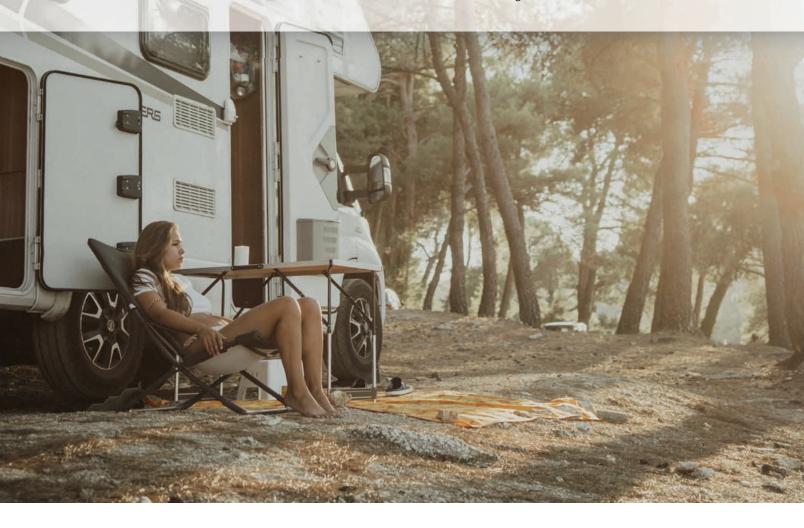

# **POWER CONVERSION & CONNECTION**

**Dual USB Chargers** 

12V Socket & Plugs

Water-Resistant Accessory Panels DeckHand™ Dimmers



24

Intelligent device recognition allows rapid charging of phones, tablets, or other mobile devices.



25

Designed to withstand the rigors of wet environments and constant vibration.




26

Panels offer customizable 12V charging and monitoring options.



27

Digitally controls dimming of non-regulated LED, incandescent, and halogen lights.

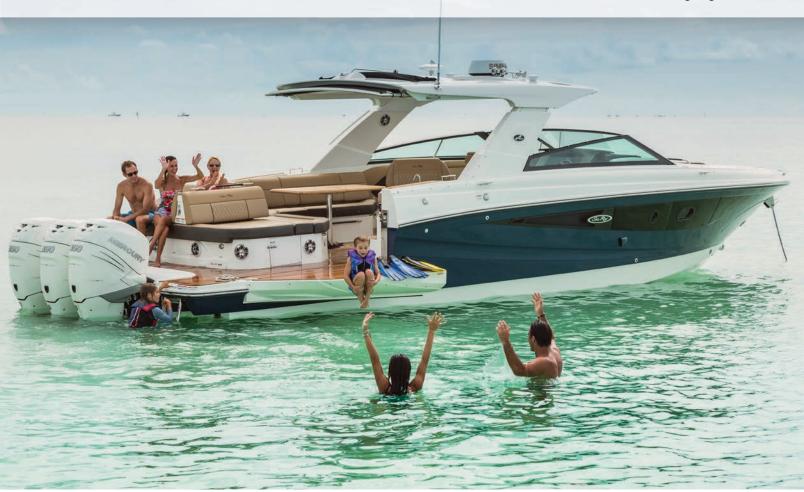

## Batteries are the heart of the electrical system and are often the single largest electrical expense.

Batteries are sensitive to failure and a shortened life if not charged properly. Modern battery chemistries require adherence to manufacturers' charging recommendations. Battery manufacturers agree precise control of voltage, time, and temperature is critical. Batteries may perform poorly and fail prematurely due to a charger's failure to properly manage these functions. A well designed battery charger will allow these variables to be correctly set for the requirements of each battery type and will manage them properly in the charging process.

18 POWER CONVERSION bluesea.com

# **Air Brake Compressors**


Automatically maintains air brake system at ready status, because lives depend on it

- · Designed for emergency vehicle use
- Automatically turns ON at 95 PSI and OFF at 125 PSI
- Industrial grade compressor provides reliable, long term operation
- · Easy installation, no mounting plate required
- · Integrated vibration damping mounts
- · Serviceable air filter and water separator filter
- Works in conjunction with engine driven compressor
- · Integrated auto drain to protect your air system

Nominal Voltage	12V DC
Motor Type	Permanent Magnet
Factory ON-OFF PSI Threshold	ON: 95 PSI, OFF: 125 PSI
Maximum Amp Draw	11A
Operating Temperature Range	4.4°C to 65°C (40°F to 150°F)
Air Outlet	Female 1/4" NPT

Part #	Description
7920	Horizontal Mount Air Brake Compressor
7921	Vertical Mount Air Brake Compressor
7910	Air Filter Assembly - complete
7911	Replacement Air Filter Elements
7912	Replacement Water Separator Filter



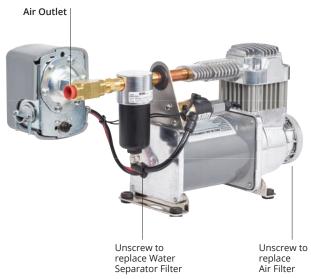

# **TECH TIP**

## **P12 Four Stage Battery Charging**

- 1. Bulk charges batteries to 75-80% of full charge.
- 2. Absorption slowly completes remaining charge.
- 3. PreFloat™ moves each battery individually from Absorption to PreFloat, based on the need of each battery. This prevents overcharging and damage to the batteries. Up to 0.5V difference between Absorption and PreFloat voltages can be achieved.
- 4. Float maintains battery charge.



**Battery Equalization Mode:** User selected battery equalizing provides advanced battery conditioning, revitalizing wet acid batteries.

#### **OTHER BATTERY CHARGERS**

Conventional battery chargers move all batteries from Absorption to the Float stage simultaneously with no ability to adjust for individual battery requirements.



Example of Flooded Lead Acid Battery


Forced Absorption: A period when batteries are potentially over charged.

### **Charge Coordination**

A boat's batteries typically spend less than 2% of their time being charged by the alternator. For the remaining 98% of the time they are being maintained by the AC battery charger. During this time, it is important that the proper charging stage of Bulk, Absorption, PreFloat, or Float be applied to each battery.


#### **UNDERWAY**

When engine is running and alternator is charging batteries, ACRs combine batteries, providing charge to each battery from the engine.

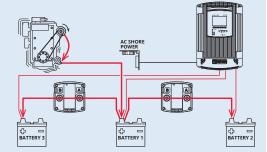

#### AT THE DOCK

When P12 Battery Charger is operating, communication with ACRs isolates batteries so the proper charge is applied to each battery.

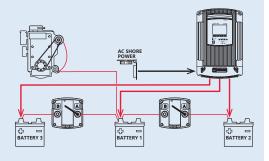

bluesea.com POWER CONVERSION 19

# **P12 Battery Chargers**

Four stage, three output, dry mount design. Rugged, finned aluminum case

- PreFloat<sup>™</sup> stage prevents over charging of start battery
- Power factor corrected for efficient use of AC
- · Intuitive diagnostic screens
- User defined charge profiles and customizable settings
- · Provides charging for up to three battery banks
- · Large, bright display
- Multi-language: English, French, German, Italian, Spanish
- Charge Coordination with Blue Sea Systems Automatic Charging Relays (ACR) controls ACR state ensuring proper float stage for each battery
- Battery Temperature Compensation adjusts charge voltage based on battery temperature
- AC over and under voltage shut down and automatic restart
- Over and under battery temperature protection charger will not operate
  if battery temperature rises above or falls below a set value
- · DC over voltage and reverse polarity protection
- · Surge and short circuit protection

Part #	7531	7532
Total Output Current	25A	40A
Input AC Current	4.5A @ 115V AC 2.25A @ 230V AC	7.5A @ 115V AC 3.75A @ 230V AC
Recommended Battery Bank Sizes*	60Ah Minimum Example: 1 × Group 24 330Ah Maximum Example: 3 × Group 31	60Ah Minimum Example: 1 × Group 24 440Ah Maximum Example: 4 × Group 31
Nominal Output Voltage	12V DC	
Output Connections	3 positive, 1 negative	
Universal AC Input Voltage	90V-265V AC	
Input Frequency Range	45-65 Hz	
Typical Float Voltage	13.5V DC	
Max. Available Voltage	16.0V DC	
Output Voltage Accuracy	0.05V DC	
Operating Temperature	−20°C (−4°F) to 70°C (158°F)	
Storage Temperature	-30°C (-22°F) to 80°C (176°F)	
Battery Types**	Flooded, Gel, AGM, TPPL, User	
Width in (mm)	8.46 (215)	
Height in (mm)	13.00 (330.6)	
Depth in (mm)	4.30 (109)	
Regulatory	CE marked, Designed and constructed for compliance to UL-1236 Marine, CSA 22.2 No. 107.2, and ABYC A-31 standards. Ignition protection per ISO 8846, and SAE J1171. Meets FCC Part 15, Class B requirements. Designed and tested to comply with California Energy Commission (CEC) efficiency requirements, and ship with these settings by default.	

- Battery bank sizes are tested to California Energy Commission compliance (CEC).
   Larger and smaller size banks could charge well, but consume slightly more
- power over the charging cycle.

  \*\* Consult battery manufacturer specifications for other battery types to avoid damage.

  Do not mix battery types.





### **Related Products**







SI-ACR page 47



ML-Series ACRs page 51



MRBF Fuse Blocks page 68





# **Battery Charger Mounting Adapter**

Easily mount any Blue Sea Systems P12 Battery Charger or ProMariner ProNauticP Battery Charger without drilling new holes

- Mounts directly into industry standard mounting holes from existing chargers
- Integrated nuts allow battery charger mounting fasteners to be inserted from either the front or rear
- Fasteners included with the Mounting Adapter: Qty 4: #10-32 x 0.75" pan head machine screws Qty 4: #10-32 Nylock Nuts





Part#	Description
7512	Battery Charger Mounting Adapter

20 POWER CONVERSION bluesea.com

# **EV Battery Charger Display**

Intuitive battery monitoring for emergency vehicle use







- · Designed for emergency vehicle use
- · Drop in replacement for traditional rectangular displays
- · Automatically detects 1-3 battery banks
- AC charge indication verifies that power is connected and the battery charger is charging
- Plain language fault indication relays if there is a fault with the battery charger
- Dip switch selectable screen configuration allows the display to show voltage bar graphs or the P12 Battery Charger summary screen
- · Displays voltage bar graphs even when AC power is not present
- Optional standby mode shuts off screen after 4 hours of inactivity
- · Automatic ON based on motion with integrated knock sensor
- · Bright, daylight readable, OLED display

Part #	7517
Display Size inchs (mm)	2.1 x 1.1 (55 x 28)
Display Type	Yellow OLED
Input Voltage	6V–36V DC, reverse polarity protected
Amperage Draw	50 mA - Maximum
	< 1 mA in Standby Mode - Minimum
Standby Mode	Shuts off screen after 4 hours of inactivity. Will resume normal function upon movement of the vehicle or by tapping the unit several times in succession.
Accuracy	± 1% at 36V DC
Number of Inputs	3 battery inputs with common reference
Width in (mm)	4.7 (119.25)
Height in (mm)	3.2 (80.5)
Depth in (mm)	1.2 (29.7)
Regulatory	Monitor face is IP66 – protected against powerful water jets when installed according to instructions.



# **P12 Battery Charger LED Remote**

Indicates battery charger stage and alerts as well as controlling basic battery charger functions





1521

#### **LED Indicators**

- · Quick check for green light confirms charging
- Displays charging stage including PreFloat for each battery
- Indicates when the charger is in equalization mode
- Indicates charger's internal fan mode
- Displays the percentage of output current for each battery.
   Will also indicate maximum output setting when maximum output is adjusted to accommodate for AC source limitations.
- · Provides warning and alert status for quick diagnostics

#### **Four Control Buttons**

- Fan: User adjustable settings (OFF, LOW, or HIGH)
- **Dim/ Alarm:** Provides adjustment to brightness of LEDs on display as well as Silence function for alarms.
- Output: User adjustable charger output when AC source limitations exist that require lowering the AC current draw.
- Standby: Places P12 Battery Charger into standby mode

Part #	7520	1521
Remote	LED Remote	360 Panel
Width in (mm)	4.15 (105.46	4.88 (123.83)
Height in (mm)	3.01 (76.56)	4.75 (120.65)
Depth in (mm)	.95 (23.91)	.95 (23.91)

#### **Related Product**



P12 Battery Charger page 19

bluesea.com POWER CONVERSION 21

# **Sure Eject**™

# Automatic AC disconnect ejects power cords upon ignition to prevent damage

- · Designed for emergency vehicle use
- Motor driven design ensures years of reliable operation
- The ejection piston is self-recessing, with no cocking required
- Keyed plug design allows for easy one-handed insertion of connector
- · Anti-arcing design on insertion and ejection
- Built in status LED indicates the presence of AC power and ejection alerts
- · Automatically attempts additional ejections if needed
- Compatible with existing 15A and 20A connectors already in the station
- · Standard mounting holes for easy retrofit
- Includes connector, yellow cover, and 5 label kit
- 6 color covers available
- Pigtails offer a secondary method of disconnecting from shore power for added reliability (sold separately)

Operating Voltage Range	8V –16V DC
Nominal Voltage	120V AC
Continuous Rating	7850: 15A, 7851: 20A

Part #	Description
7850	15A Sure Eject
7850001	15A Sure Eject - No Cover
7851	20A Sure Eject
7851001	20A Sure Eject - No Cover
7840	15A Connector
7841	20A Connector
7820	Yellow Cover
7821	Red Cover
7822	Black Cover
7823	White Cover
7824	Blue Cover
7825	Grey Cover
7830	15A Sure Eject Yellow Pigtail
7831	20A Sure Eject Yellow Pigtail
7832	15A Standard Black Pigtail
7833	20A Standard Black Pigtail
7834	15A to 20A Adapter Pigtail



0;

7840 / 7841





7834

#### **Related Products**













# **Sure Eject Mounting Adapter**

Easily install 15A and 20A Sure Eject units from the outside of a vehicle

- Allows one person installation of Sure Eject
- · No special shaped cutouts required
- Threaded backing plate secures Sure Eject to vehicle without added hardware
- Compatible with all 15A and 20A Sure Eject ejection units and covers



Part #	Description
7860	Sure Eject Mounting Adapter

22 POWER CONVERSION bluesea.com

# 10A & 20A BatteryLink® Chargers

### Charge two battery banks with shore power or the engine's alternator

- AC charging at the dock or garage: Use AC shore power to charge two isolated battery banks with the 3 stage battery charger
- DC charging away from the dock or garage: Share the DC power from the alternator with both the start and the auxiliary battery through the integrated ACR
- 20A models only: Emergency jump start by combining batteries if start battery is low.
   single pole/single throw switch required. (sold separately)
- Battery temperature compensation prolongs battery life (1820 included)
- Start isolation protects sensitive electronics from voltage sags and spikes
- Includes LED remote indicator for charge status at the helm
- · Snap-on insulating cover

Nominal Output Voltage	12V DC
Output Connections	2 positive, 1 negative
Universal AC Input	100V-240V AC, 50/60 Hz
Typical Float Voltage (25°C)	13.5V DC
Typical Absorption Voltage (25°C)	14.4V DC
ACR Combine Voltage	13.0V
ACR Open Voltage	12.75V
Terminal Stud Size	1/4"-20 (accepts M6 ring terminal)
Maximum 1/4" Terminal Stud Torque	60 in-lb (6.8 Nm)
Positive Terminal Stud Size (20A model only)	3/8"-16 (accepts M10 ring terminal)
Maximum 3/8" Terminal Stud Torque	140 in-lb (15.8 Nm)
Quick Connect Terminal Size	1/4" x 0.032"
Battery Types	Flooded, AGM, TPPL



#### North American Models

Part #	Total Output Current	ACR Continuous	Plug Style
7605	10A	65A	North American: NEMA 5-15P
7608	20A	170A	North American: NEMA 5-15P

#### Regulatory

Designed and constructed for compliance to UL-1236 Marine, CSA 22.2 No. 107.2 and ABYC A-31 standards. Ignition protected per ISO 8846 and SAE J1171. Meets FCC Part 15, Class B requirements. Designed and tested to comply with California Energy Commission (CEC) efficiency standards. Waterproof IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)

#### **International Models**

Part #	Total Output Current	ACR Continuous	Plug Style
7607	20A	170A	European: CEE 7/7
7606	20A	170A	International: Bare wire

#### Regulatory

CE Certified, Designed and constructed for compliance to EN60335-2-29. Ignition protected per ISO 8846 and SAE J1171.

Waterproof IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)






#### 10A Battery Charger - 65A ACR

**7603** International: Bare wire **7604** European: CEE 7/7 **7605** North American: NEMA 5-15P



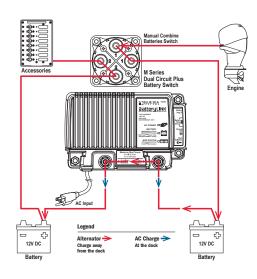

## **Related Products**







**e-**Series Battery Switch page 32



Mini Add-A-Battery Plus page 49

bluesea.com POWER CONVERSION 23



#### 20A Battery Charger - 170A ACR


7606 International: Bare wire


**7607** European: CEE 7/7

7608 North American: NEMA 5-15P


7609 Australia/New Zealand: AS/NZS 3112




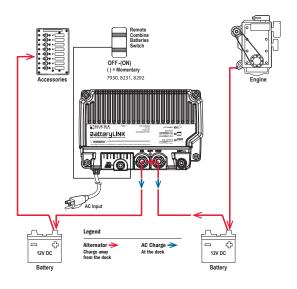



**10A BatteryLink Chargers** 





**20A BatteryLink Chargers** 

# **TECH TIP**

# **AC & DC Battery Charging Explained**

#### DC Charging (Away from the Dock or Garage)

The BatteryLink Charger incorporates DC charging through an integrated Automatic Charging Relay (ACR). An ACR uses a relay combined with a voltage sensing circuit. When a DC charge is applied to the start battery, and causes the voltage to rise above 13.0V, the relay closes and combines the two batteries to share the charge. When the charge is taken away or a load on the battery causes the voltage to drop below 12.75V, the relay will open, isolating the two batteries. This means that even when the BatteryLink Charger is disconnected from AC power you can charge both your battery banks with a DC charging source, like an engine alternator.

#### AC Charging (At the Dock or Garage)

The BatteryLink Charger is powered by AC when the cord is plugged in, and will source current to charge your batteries. However, unlike a typical two bank charger, the BatteryLink Charger will charge both batteries simultaneously using the integrated ACR. This works in the same way as when an external DC charging source is used. When AC power is applied, and the voltage of the start battery rises above 13.0V, the ACR will close. This combines the batteries, allowing charge current to flow to the auxiliary battery as well as the start battery. For this reason, the BatteryLink Charger can only be used in 12V applications.

POWER CONVERSION bluesea.com

# 12/24V Dual USB 2.1A Chargers

Charge two mobile devices on the go





• Compatible with popular mobile devices

· Internal fusing

24

- · Conformal coated circuit board for the harsh marine environment
- · Protective dust cap keeps debris and moisture out
- Mounts in a common 1-1/8" hole

Maximum Output Current	2.1A DC (total)
Input Voltage Range	9V-32V DC
Output Voltage	5V DC ±5%
Port Configuration	D +=2.0V, D-=2.8V
Parasitic Current Draw	15mA
Thermal Overload Protection	Yes
Short Circuit Protection	Yes
Reverse Polarity Protection	Yes
USB	2.0, Type A
Cutout Dimensions	1-1/8" (29 mm) diameter
Regulatory	RoHS, CE certified

Part#	Description	Color
1016	Socket Mount Charger	Black
1016200	Socket Mount Charger	White

#### **Related Products**



Water-Resistant USB Accessory Panels page 26

## **USB Extension**

Control a stereo or other device remotely from a phone or tablet in the cockpit

- USB 2.0 data/voltage port easily mounts at the dash with a prewired connecting cable that conveniently plugs directly into the USB on the stereo.
- Protective dust cap with tether keeps out dust and spray



Part #	1044
Voltage	12V DC
Cable Length	5 ft (1.524M)
<b>Cutout Dimensions</b>	1-1/8" (29 mm) diameter
USB	2.0, Type A
Regulatory	IP45 (with cover closed) - protected against jets of water (see inside back cover)

# 12/24V Dual USB 4.8A Chargers


Intelligent device recognition maximizes charge rate for phones, tablets, or other mobile devices




- · Charges at the speed required by specific devices
- Internal filtering for reduced electronic interference
- · Over temperature protection
- · Conformal coated circuit board for the harsh marine environment
- · Protective dust cap keeps debris and moisture out
- 1039 Mounts in an existing contura switch aperture
- 1045 Mounts in a common 1-1/8" hole

Maximum Output Current	4.8A DC (total)
Input Voltage Range	9V-32V DC
Output Voltage	5V DC ±5%
Port Configuration	Intelligent Device Recognition
Parasitic Current Draw	1mA
Thermal Overload Protection	Yes
Short Circuit Protection	Yes
Reverse Polarity Protection	Yes
USB	2.0, Type A
Cutout Dimensions	1039 - 1.45" × 0.83" (36.83 × 21.08 mm) 1045 - 1-1/8" (29 mm) diameter
Regulatory	RoHS. CE certified

Part #	Description
1039	Switch Mount Charger
1045	Socket Mount Charger





#### **Related Products**



Water-Resistant USB Accessory Panels page 26

# **48V Dual USB 4A Chargers**

Intelligent device recognition maximizes charge rate for phones, tablets, or other mobile devices



- Ideal for golf carts and other 48V systems
- Spring-hinged cover keeps debris and moisture out
- Charges at the speed required by specific devices
- Internal filtering for reduced electronic interference
- Over temperature protection
- Conformal coated circuit board for the harsh marine environment
- 1038 Mounts in an existing contura switch aperture
- 1046 Mounts in a common 1-1/8" hole

Maximum Output Current	4A DC (total)
Input Voltage Range	32V-64V DC
Output Voltage	5V DC ±5%
Port Configuration	Intelligent Device Recognition
Parasitic Current Draw	1mA
Thermal Overload Protection	Yes
Short Circuit Protection	Yes
Reverse Polarity Protection	Yes
USB	2.0, Type A
Cutout Dimensions	1038 - 1.45" × 0.83" (36.83 × 21.08 mm) 1046 - 1-1/8" (29 mm) diameter
Regulatory	RoHS

Part#	Description
1038	Switch Mount Charger
1046	Socket Mount Charger
1035	Spring-hinged cover for 1038 & 1039
1036	Spring-hinged cover for 1046 & 1045

## 360 Panels

Integrates DC Socket and Dual USB Chargers with 360 Panel System





1472 1478

Part #	Description	Width in (mm)	Height in (mm)	Depth in (mm)
1472	2 × 1011	4.88 (123.83)	4.75 (120.65)	1.50 (38.10)
1478	1 × 1011, 1 × 1016	4.88 (123.83)	4.75 (120.65)	1.50 (38.10)

# **12V Socket and Plugs**

Designed to withstand the rigors of wet environments and constant vibration

- · Corrosion resistant materials
- Twist lock system plug locks securely into socket
- · Internal strain relief and cord seal
- current carrying components are nickel plated copper alloy
- Plug has a sealing ring to keep out spray and make it seat firmly in the socket
- Socket features a protective dust cap that keeps debris and moisture out
- 1012 and 1013 heavy duty 18 gauge wire
- 1012 cord reaches up to 6 feet

Voltage Nominal	12V DC
Amperage Max. Operating	15A DC (socket)
Amperage Max. Operating	10A DC (plug)
Socket Cutout Dimensions	1-1/8" (29 mm) diameter

Part #	Description	Dust Cap
1010	Plug	
1011	Black Socket	Yes
1011200	White Socket	Yes
1012	Single Plug with Single Socket Extension	Yes
1014	Mounting Bracket for Sockets	
1015	Plug and Socket Set - Includes 1010 and 1011	Yes



26 **POWER CONVERSION** bluesea.com

# **Water-Resistant Accessory Panels**

Easy to install panels offer customizable 12V charging and monitoring options

- Pre-wired harness included in all panels for easy installation
- Silicon breaker boots and gasket protects against water ingress
- · Illuminated Carling Technologies 15A circuit breaker allows the ability to shut off panel preventing parasitic draw
- Polycarbonate/ABS panel face is UV-stabilized, flame retardant, and will not corrode
- 12V DC only

Part #	Description	Width in (mm)	Height in (mm)	Depth in (mm)
4363	15A Circuit Breaker, 12V Socket, 2.1A Dual USB Charger	4.94 (125.4mm)	2.25 (57.2mm)	2.53 (64.3mm)
4364	15A Circuit Breaker, 2x Blank Apertures	4.94 (125.4mm)	2.25 (57.2mm)	Based on components
4365	15A Circuit Breaker, 12V Socket, 2x 2.1A Dual USB Chargers	6.61 (168.0mm)	2.25 (57.2mm)	2.53 (64.3mm)
4366	15A Circuit Breaker, 12V Socket, 2.1A Dual USB Charger, Mini Voltmeter	6.61 (168.0mm)	2.25 (57.2mm)	2.75 (69.8mm)
4367	15A Circuit Breaker, 3x Blank Apertures	6.61 (168.0mm)	2.25 (57.2mm)	Based on components
4368	15A Circuit Breaker, 12V Socket, 2x 2.1A Dual USB Chargers, Mini Voltmeter	8.29 (210.5mm)	2.25 (57.2mm)	2.75 (69.8mm)
4369	15A Circuit Breaker, 4x Blank Apertures	8.29 (210.5mm)	2.25 (57.2mm)	Based on components

Regulatory 4367, 4364, 4369 Only - CE certified IP45 - protected against water jets (see inside back cover)











4364



4363



4368



#### **Related Products**



2.1A Dual USB Chargers page 24



4.8A Dual USB Chargers page 24



12V Socket



Mini LED Meters page 25 page 145

# **DeckHand™ Dimmers**

Digitally controls dimming of non-regulated LED, incandescent, and halogen lights

- · Illuminated exit with adjustable time delay
- Supports multiple switch locations
- · Memory for last dimmer setting
- Bulb saver prevents bulb aging while batteries are being charged
- Provides continuous voltage control from 0 to 100% of input voltage
- · Offset mounting tabs allow dimmers to be mounted close together
- Retail package includes momentary SPDT (ON)-OFF-(ON) switch 8216 (page 92)


Maximum Parasitic Current	<2mA
Temperature Rating	-40°C to 85°C
Regulatory	CE marked, Meets ISO 8846 and SAE J1171 external ignition protection requirements



Part #	Amps	Volts	Operating Range	Width in (mm)	Height in (mm)	Depth in (mm)
7506	6A	12V DC	9V-16V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)
7504	6A	24V DC	18V-32V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)
7507	12A	12V DC	9V-16V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)
7509	12A	24V DC	18V-32V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)
7508	25A	12V DC	9V-16V	3.23 (82.0)	3.47 (88.1)	1.30 (33.0)

Note: Do not use with regulated LED bulbs.



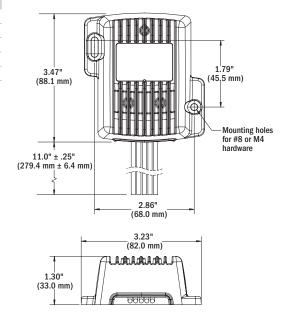


# **TECH TIP**

#### **Illuminated Exit**

The illuminated exit feature allows boaters to safely disembark before the lights automatically turn off. Using the illuminated exit feature:

**One minute delay:** Hold the switch in up position for 2 seconds, lights will flash. Release switch after first flash and the lights will remain on for 1 minute.

**Two to five minute delay:** Hold the switch in up position for 1–4 seconds after the first flash. Release the switch after 2 to 5 flashes. The lights will remain on for 1 minute for each flash up to a maximum of 5 minutes.

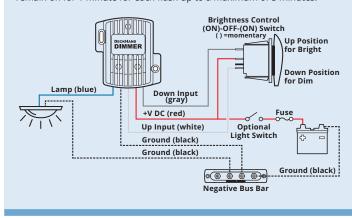



**Example of nested DeckHand Dimmers** 

# BATTERY MANAGEMENT

### **Manual Battery Switches**



30

Commonly used on small boats or vehicles where the batteries are located near the operator.

### **Battery Management Panels**



38

Easily manages multiple battery bank systems.

#### **Solenoid Switches**



39

Electronic switches with no manual control, for circuits where a manual battery disconnect is offered elsewhere in the circuit.

# Low Voltage Disconnect (LVD)



40

Senses low battery voltage and disconnects non-critical loads to save power for engine starting.



# **BATTERY MANAGEMENT**

# Automatic Timer Disconnect (ATD)



41

Adjustable time or voltage based battery disconnect automatically shuts off devices to preserve battery power.

# Remote Battery Switches (RBS)



42

Used when there is not an easily accessible location near the batteries to mount a battery switch, requiring either a long cable run or a battery switch mounted in a difficult to access location.

# Automatic Charging Relays (ACR)



4.7

Automatically combines two battery banks during charging and isolates batteries when discharging. Optionally isolates batteries when starting the engine.

### **Add-A-Battery Kits**



49

Simplify switching and automate charging for two battery bank systems. Simply turn the battery switch On when you arrive and Off when you leave.



## Battery management is central to the safe operation of a boat or vehicle.

All boats and vehicles with an engine have at least one battery with the primary purpose of starting the engine and providing power for loads such as lights, pumps, and electronics. The safe switching between batteries, loads, and charge sources is achieved using products in this section.

30 BATTERY MANAGEMENT bluesea.com

# **M**-Series Battery Switches

## 300A continuous rating for outboards and small gasoline or diesel engines


- Tin-plated copper studs for maximum conductivity and corrosion resistance
- Studs accept 3/8" (M10) ring terminals
- 7/8" (22 mm) stud length accepts multiple cable terminals
- Blue Sea Systems one-piece terminal stud design never loosens over time
- One-piece stainless flange nuts ensure safe and secure connections
- Isolating cover protects rear contacts
- Breakout tabs allow wire access in any direction
- 6 Circuit label set included (not included with 6004, 6005, 6004200, 6005200)
- Icon Circuit Identification Label Kit available 7902 sold separately (p. 158)


Part #	6004, 6005, 6006, 6004200, 6005200, 6006200	6007, 6007200, 6008, 6008200	6010, 6011, 6010200, 6011200
Cranking Rating: 30 sec.	900A	900A	675A per circuit
Intermittent Rating: 5 min.	500A	500A	450A per circuit
Continuous Rating	300A	300A	300A per circuit
Voltage Max. Operating	48V DC	32V DC	32V DC
Regulatory	CE marked, ISO 8846, UL Listed – UL 1107 electric power switches, Meets American Boat and Yacht Council (ABYC) requirements, Meets UL 1500 and SAE J1171 external ignition protection requirements, IP66 – protected agains powerful water jets (see inside back cover)		

# IGNITION PROTECTED

6004       Single Circuit ON-OFF with Locking Key       Red         6004200       Single Circuit ON-OFF with Locking Key       Black         6005       Single Circuit ON-OFF with Key       Red         6005200       Single Circuit ON-OFF with Key       Black         6006       Single Circuit ON-OFF       Red         6006200       Single Circuit ON-OFF       Black         6007       Selector 4 Position       Red         6007200       Selector 4 Position       Black         6008       Selector 3 Position       Red         6008200       Selector 3 Position       Black         6010       Dual Circuit™       Red         6010200       Dual Circuit Plus™       Red         6011       Dual Circuit Plus™       Red         6011200       Dual Circuit Plus™       Black         7903       Removable key for 6004       Red         7903       Removable key for 6005       Red         7900       Removable key for 6005       Red	Part #	Description	Color
6005         Single Circuit ON-OFF with Key         Red           6005200         Single Circuit ON-OFF with Key         Black           6006         Single Circuit ON-OFF         Red           6006200         Single Circuit ON-OFF         Black           6007         Selector 4 Position         Red           6007200         Selector 4 Position         Black           6008         Selector 3 Position         Red           6008200         Selector 3 Position         Black           6010         Dual Circuit™         Red           6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6004	Single Circuit ON-OFF with Locking Key	Red
6005200         Single Circuit ON-OFF with Key         Black           6006         Single Circuit ON-OFF         Red           6006200         Single Circuit ON-OFF         Black           6007         Selector 4 Position         Red           6007200         Selector 4 Position         Black           6008         Selector 3 Position         Red           6008200         Selector 3 Position         Black           6010         Dual Circuit™         Red           6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6004200	Single Circuit ON-OFF with Locking Key	Black
6006         Single Circuit ON-OFF         Red           6006200         Single Circuit ON-OFF         Black           6007         Selector 4 Position         Red           6007200         Selector 4 Position         Black           6008         Selector 3 Position         Red           6008200         Selector 3 Position         Black           6010         Dual Circuit™         Red           6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6005	Single Circuit ON-OFF with Key	Red
6006200         Single Circuit ON-OFF         Black           6007         Selector 4 Position         Red           6007200         Selector 4 Position         Black           6008         Selector 3 Position         Red           6008200         Selector 3 Position         Black           6010         Dual Circuit™         Red           6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6005200	Single Circuit ON-OFF with Key	Black
6007         Selector 4 Position         Red           6007200         Selector 4 Position         Black           6008         Selector 3 Position         Red           6008200         Selector 3 Position         Black           6010         Dual Circuit™         Red           6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6006	Single Circuit ON-OFF	Red
6007200         Selector 4 Position         Black           6008         Selector 3 Position         Red           6008200         Selector 3 Position         Black           6010         Dual Circuit™         Red           6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6006200	Single Circuit ON-OFF	Black
6008         Selector 3 Position         Red           6008200         Selector 3 Position         Black           6010         Dual Circuit™         Red           6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6007	Selector 4 Position	Red
6008200         Selector 3 Position         Black           6010         Dual Circuit™         Red           6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6007200	Selector 4 Position	Black
6010         Dual Circuit™         Red           6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6008	Selector 3 Position	Red
6010200         Dual Circuit™         Black           6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6008200	Selector 3 Position	Black
6011         Dual Circuit Plus™         Red           6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6010	Dual Circuit™	Red
6011200         Dual Circuit Plus™         Black           7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6010200	Dual Circuit™	Black
7903         Removable key for 6004         Red           7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6011	Dual Circuit Plus™	Red
7903200         Removable key for 6004200         Black           7900         Removable key for 6005         Red	6011200	Dual Circuit Plus™	Black
7900 Removable key for 6005 Red	7903	Removable key for 6004	Red
<del>`</del>	7903200	Removable key for 6004200	Black
7000200 Pamovable kov for 6005200 Plack	7900	Removable key for 6005	Red
7900200 Removable key for 0000200 Black	7900200	Removable key for 6005200	Black
<b>7901</b> Removable knob Red	7901	Removable knob	Red
7901200 Removable knob Black	7901200	Removable knob	Black
9159 Paralleling link bus (2 pack) -	9159	Paralleling link bus (2 pack)	-
1139 360 Panel Battery Switch Module -	1139	360 Panel Battery Switch Module	-

For the full list of specifications and operation diagrams see pages 36-37 For the wiring schematics for typical applications see pages 162-163

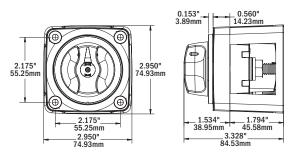



#### **Mounting Options**



# m-Series Battery Switch Mounting Panel



1139 (switch sold separately)
Dimensions (W x H):
4.88 × 4.75 in
(123.83 × 120.65 mm)

- 360 Panel System
- Accepts the m-Series Battery Switch, m-ACR, or m-LVD

#### **Single Circuit ON-OFF**

Switches a single battery to a single load group





6004, 6005, 6006





6005



6006


### **Selector 3 Position**

Switches isolated battery banks to all loads





6008



#### **Related Products**







Add-A-Battery 360 Panel page 38



page 40

m-ACR

page 46



Mini Add-A-Battery page 48



Mini Add-A-Battery Plus page 49





Circuit Identification Label Kit page 158

# **Selector 4 Position**

Switches isolated battery banks to all loads or combines battery banks to all loads





6007

## **Dual Circuit**™

Simultaneously switches two isolated battery banks or circuits. May be used to switch the positive and negative conductors for required applications.





6010

The positive and negative conductors should not be attached to the same battery switch. The only exceptions are the Dual Circuit™ Battery Switches, 6010 and 5510. Since these models have electrically isolated circuits and do not include a combine feature, they can provide disconnect to the positive and negative conductors simultaneously.

#### **Dual Circuit Plus**™

Simultaneously switches two isolated battery banks or combines battery banks to all loads. CAN NOT be used to switch positive and negative conductors because of the combine feature.





6011

32 BATTERY MANAGEMENT bluesea.com

# **⊘-Series Battery Switches**

#### 350A continuous rating for inboard gasoline or diesel engines

- Tin-plated copper studs for maximum conductivity and corrosion resistance
- Accepts up to 4/0 AWG (120 mm²) battery cables
- Studs accept 3/8" (M10) ring terminals
- 7/8" (22 mm) stud length accepts multiple cable terminals
- Blue Sea Systems one-piece terminal stud design never loosens over time
- One-piece stainless flange nuts ensure safe and secure connections
- Fits most standard Perko and Guest battery switch hole patterns
- · Tactile indicator conveys knob position by feel
- Icon Circuit Identification Label Kit available 7902 sold separately (p. 158)

Part #	9003E, 9004E	9001E, 9002E, 11001	5510E, 5511E
Cranking Rating: 30 sec.	1,200A	1,200A	700A per circuit
Intermittent Rating: 5 min.	600A	600A	525A per circuit
Continuous Rating	350A	350A	350A per circuit
Voltage Max. Operating	48V DC	32V DC	32V DC
Regulatory	switches, Meets A	846, UL Listed – UL 1107 American Boat and Yacht eets UL 1500 and SAE J117 Tements, IP66 – protected side back cover)	Council (ABYC) 71 external ignition


# IGNITION PROTECTED


Part #	Description	AFD*
5510E	Dual Circuit™	
5511E	Dual Circuit Plus™	
9001E	Selector 4 Position	
9002E	Selector 4 Position	Yes
9003E	Single Circuit ON-OFF	
9004E	Single Circuit ON-OFF	Yes
11001	Selector 3 Position	Yes

\* Alternator Field Disconnect (AFD) feature protects the diodes in the alternator in the event of the switch being switched to the OFF position while the engine is running. If the AFD is not used to protect the alternator, an LED can be connected to the AFD terminals to indicate when the battery switch is in any position but OFF.

For the full list of specifications and operation diagrams see pages 36-37 For the wiring schematics for typical applications see pages 162-163

#### **Mounting Options**

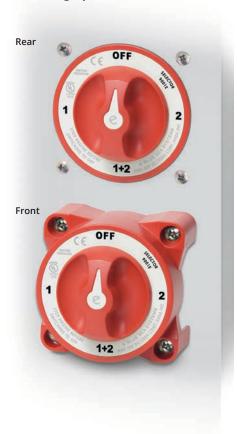

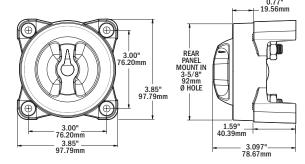

#### **Related Products**



SI-ACR page 47



Add-A-Battery page 48



Circuit Identification Label Kit page 158

# **TECH TIP**

#### Choose the Dual Circuit Plus™

- · Easily manage two battery banks
- When battery bank selection is not necessary
- When using sensitive electronics
- When paired with an Automatic Charging Relay (ACR)

**The Dual Circuit Plus** is a double pole switch that supplies power to devices connected to a specific battery bank.

House electronics are isolated from the Start bank.

This preserves the Start Battery and prevents sensitive electronics from being subjected to voltage sags and spikes during starting. Designed for use with an Automatic Charging Relay (ACR) to provide simultaneous charging of two battery banks from the engine's alternator.

#### How to use the Dual Circuit Plus with an ACR:

- 1. Power is Needed Turn the switch into the ON position.
- 2. No Power Needed (Storage) Select OFF to prevent current draw.
- Emergency Parallel (Jump Starting) Turn the switch to the Combine Batteries position. Once the engine is running, turn the switch to the ON position.

#### **Single Circuit ON-OFF**

Switches a single battery to a single load group





**Selector 3 Position** 

Switches isolated battery banks to all loads





#### **Selector 4 Position**

Switches isolated battery banks to all loads or combines battery banks to all loads







#### **Dual Circuit**™

Simultaneously switches two isolated battery banks or circuits. May be used to switch the positive and negative conductors for required applications.





#### **WARNING**

The positive and negative conductors should not be attached to the same battery switch. The only exceptions are the Dual Circuit™ Battery Switches, 6010 and 5510 c. Since these models have electrically isolated circuits and do not include a combine feature, they can provide disconnect to the positive and negative conductors simultaneously.


#### **Dual Circuit Plus**™

Simultaneously switches two isolated battery banks or combines battery banks to all loads. CAN NOT be used to switch positive and negative conductors because of the combine feature.





**TECH TIP** 

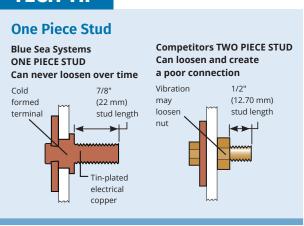

<sup>\*</sup> Includes Alternator Field Disconnect (AFD)

BATTERY MANAGEMENT bluesea.com

# **HD-Series Battery Switches**

Up to 600A continuous rating for large diesel engines

- Tin-plated copper studs for maximum conductivity and corrosion resistance
- Accepts up to 4/0 AWG (120 mm²) battery cables
- Studs accept 1/2" (M12) ring terminals
- 7/8" (22 mm) stud length accepts multiple cable terminals
- Blue Sea Systems one-piece terminal stud design never loosens over time
- One-piece stainless flange nuts ensure safe and secure connections
- Fits most Perko and Guest low amperage battery switch hole patterns
- · Case design allows surface or rear mounting options
- Tactile indicator conveys knob position by feel
- Icon Circuit Identification Label Kit available 7902 sold separately (p. 158)

Part #	3000, 3001	3002, 3003, 11003		
Cranking Rating: 30 sec.	1,750A	1,600A		
Intermittent Rating: 5 min.	900A	700A		
Continuous Rating	600A	500A		
Voltage Max. Operating	32V DC	32V DC		
Regulatory	CE marked, ISO 8846, UL Listed – UL 1107 electric power switches, Meets American Boat and Yacht Council (ABYC) requirements, Meets UL 1500 and SAE J1171 external ignition protection requirements IP66 – protected against powerful water jets (see inside back cover)			

#### IGNITION PROTECTED

34


Part #	Description	AFD*
3000	Single Circuit ON-OFF	
3001	Single Circuit ON-OFF	Yes
3002	Selector 4 Position	
3003	Selector 4 Position	Yes
11003	Selector 3 Position	Yes

\* Alternator Field Disconnect (AFD) feature protects the diodes in the alternator in the event of the switch being switched to the OFF position while the engine is running. If the AFD is not used to protect the alternator, an LED can be connected to the AFD terminals to indicate when the battery switch is in any position but OFF.

For the full list of specifications and operation diagrams see pages 36-37 For the wiring schematics for typical applications see pages 162-163

## **Mounting Options**



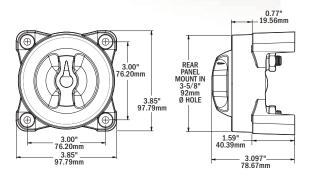



#### **Related Product**



Circuit Identification Label Kit page 158

## **Single Circuit ON-OFF**

Switches a single battery to a single load group





#### **Selector 4 Position**

Switches isolated battery banks to all loads or combines battery banks to all loads







### **Selector 3 Position**

Switches isolated battery banks to all loads






# **TECH TIP**

# **HD-Series Connections**

**3000 and 3001 HD-Series ON-OFF battery switches have three studs;** one stud for the battery connections and two studs for the common load terminations.


**3002** and **3003** HD-Series Selector battery switches also have three studs; but the configuration is different with one stud for Battery 1, one stud for Battery 2, and one stud for the common load terminations.

#### 3000 and 3001 Connections



014-011

3002, 3003, and 11003 Connections





<sup>\*</sup> Includes Alternator Field Disconnect (AFD)

**BATTERY MANAGEMENT** bluesea.com

# **Manual Battery Switch Specification Table**

36

















Part #	6004	6005	6006	9003E, 9004E	3000, 3001	6008	11001	11003	
Page #		30		32	34	30	32	34	
Switch Type	Single Circuit ON-OFF				Selector 3 Position				
Switch Family	m-Series		e-Series	HD-Series	m-Series	e-Series	HD-Series		
Function		Switches a sir	gle battery to	a single load group		Switches eith	ner isolated battery	bank to loads	
Battery Inputs			1			2	2		
Switch Positions	2				3	3			
Battery Combine									
Make Before Break	N/A N/A			N/A	N/A				
Cranking Rating (30 sec.)		900A		1,200A	1,750A	900A	1,200A	1,600A	
Intermittent Rating (5 min.)		500A		600A	900A	500A	600A	700A	
Continuous Rating		300A		350A	600A	300A	350A	500A	
Voltage Max. Operating		48V DC		48V DC	32V DC	32V DC	32'	V DC	
Width		2.83" (72 mm)		3.85" (9	8 mm)	2.83" (72 mm)	3.85" (	(98 mm)	
Height		2.83" (72 mm) 3.85" (98 mm)		8 mm)	2.83" (72 mm)	3.85" (98 mm)			
Mounting Centers	2	2.18" (55 mm) 3.00" (76 mm)		'6 mm)	2.18" (55 mm)	3.00" (76 mm)			
Mounting Hardware	#	#10 (M5) Screws 1/4" (M6) Screws		) Screws	#10 (M5) Screws	1/4" (M6) Screws			
Terminal Stud Size		3/8"-16	5 (M10)		1/2" (M12)	3/8"-16 (M10)	3/8"-16 (M10)	1/2" (M12)	
Terminal Stud Length			7/8" (22 mr	n)		7/8" (22 mm)			
Max. Terminal Stud Torque	120	in-lb (13.56 N-m	)	140 in-lb (15.82 N-m)	220 in-lb (24.86 N-m)	120 in-lb (13.56 N-m)	140 in-lb (15.82 N-m)	220 in-lb (24.86 N-m)	
Terminal Stud Material	Tin-plated copper				Tin-plated copper				
Cable Size to Meet Ratings *			4/0 AWG (120	mm²)		4/0 AWG (120 mm²)			
Cable Clearance for 4/0 Cables	1	.12" (28.4 mm)		1.10" (27	7.9 mm)	1.12" (28.4 mm)	" (28.4 mm) 1.10" (27.9 mm)		
Ignition Protected	UL 1500, SAE J1171			UL 1500, SAE J1171					
Ingress Protected			IP66**			IP66**			
These diagrams are intended for reference of how the switches operate and are not wiring diagrams. Consult an ABYC certified marine electrical professional for system design and circuit protection.	Switch set to ON			Switch set to 2					

<sup>\*</sup> Reducing cable size will reduce current rating

<sup>\*\*</sup> See inside back cover



bluesea.com



9001E, 9002E













30	32	34	30	32	30	32	
Selector 4 Position		Dual Circuit <sup>™</sup>		Dual Circuit Plus™			
m-Series	e-Series	HD-Series	m-Series	e-Series	m-Series	e-Series	
	d battery banks to all load pattery banks to all loads	ds or combines	Simultaneously switches two isolated battery banks			Simultaneously switches two isolated battery banks or combines battery banks to all loads	
	2		2	2	2		
	4		2	2		3	
	Yes		_	_	Y	es	
	Yes		_	_	Y	es	
900A	1,200A	1,600A	675A per circuit	700A per circuit	675A per circuit	700A per circuit	
500A	600A	700A	450A per circuit	525A per circuit	450A per circuit	525A per circuit	
300A	350A	500A	300A per circuit	350A per circuit	300A per circuit	350A per circuit	
32V DC			32V DC		32\	/ DC	
2.83" (72 mm)	3.85" (9	98 mm)	2.83" (72 mm)	3.85" (98 mm)	2.83" (72 mm)	3.85" (98 mm)	
2.83" (72 mm)	3.85" (9	98 mm)	2.83" (72 mm)	3.85" (98 mm)	2.83" (72 mm)	3.85" (98 mm)	
2.18" (55 mm)	3.00" (7	76 mm)	2.18" (55 mm)	3.00" (76 mm)	2.18" (55 mm)	3.00" (76 mm)	
#10 (M5) Screws	1/4" (M6	s) Screws	#10 (M5) Screws	1/4" (M6) Screws	#10 (M5) Screws	1/4" (M6) Screws	
3/8"-16 (M10)	3/8"-16 (M10)	1/2" (M12)	3/8"-16	6 (M10)	3/8"-1	6 (M10)	
7/8" (22 mm)		7/8" (2	2 mm)	7/8" (2	22 mm)		
120 in-lb (13.56 N-m)	140 in-lb (15.82 N-m)	220 in-lb (24.86 N-m)	120 in-lb (13.56 N-m)	140 in-lb (15.82 N-m)	120 in-lb (13.56 N-m)	140 in-lb (15.82 N-m)	
	Tin-plated copper		Tin-plate	d copper	Tin-plate	ed copper	
	4/0 AWG (120 mm²)		4/0 AWG (	120 mm²)	4/0 AWG	(120 mm²)	
1.12" (28.4 mm)	1.10" (2	7.9 mm)	1.12" (28.4 mm)	1.10" (27.9 mm)	1.12" (28.4 mm)	1.10" (27.9 mm)	

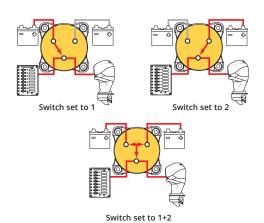


UL 1500, SAE J1171

IP66\*\*




UL 1500, SAE J1171

IP66\*\*



UL 1500, SAE J1171

IP66\*\*



Switch set to COMBINE BATTERIES

BATTERY MANAGEMENT bluesea.com

# **Battery Management Panels**

Easily manage multiple battery bank systems

- Isolates the Start circuit from the House circuit
- Allows emergency cross connect between isolated battery banks
- Protects electronics from sags and spikes caused by engine cranking

Regulatory

38

Meets UL 1500 and SAE J1171 external ignition protection requirements







**Related Products** 



m-ACR page 46



SI-ACR page 47

Part #	8280	8080
Description	Dual Battery Bank-Traditional Metal	Dual Battery Bank-Traditional Metal
Voltage Max. Operating	48V DC	48V DC
Circuit Breakers		1 × C-Series Flat Rocker, MAIN 100A
Battery Switch	3 × 6006	2 × 6006
Width x Height in (mm)	6.25 (158.75) × 7.50 (190.50)	5.25 (133.35) × 6.50 (165.10)
Depth in (mm)	2.25 (57.15)	3.00 (76.20)
Labels Included	Square Format Label Set 4218	Square Format Label Set 4218







Part #	1408	8686	8690
Description	Dual Battery Bank - 360 Panel	Dual Battery Bank - Traditional Metal	Dual Battery Bank - Traditional Metal
Nominal Voltage	12V DC	12V / 24V DC	12V / 24V DC
24-Hour Circuits	3 unswitched	2 unswitched	2 unswitched
Circuit Breakers	1 × C-Series Flat Rocker, MAIN 100A 3 × Push Button Reset-Only - BRANCH 15A	1 × C-Series Flat Rocker, MAIN 100A 2 × Push Button Reset-Only - BRANCH 15A, spare apertures for additional breakers	1 × C-Series Flat Rocker, MAIN 100A 2 × Push Button Reset-Only - BRANCH 15A, spare apertures for additional breakers
Battery Switch	6011200	6011	5511E
Width x Height in (mm)	4.88 (123.83) × 7.75 (196.85)	4.50 (114.30) × 7.50 (190.50)	5.25 (133.35) × 8.00 (203.20)
Depth in (mm)	3.50 (88.90)	3.25 (82.55)	3.00 (76.20)
LEDs	ON Indicating LEDs in all circuits	ON Indicating LEDs in all circuits	ON Indicating LEDs in all circuits
Labels Included	Square Format Label Set 4218	24-hour Round Label Set & Square Format Label Set 4218	24-hour Round Label Set & Square Format Label Set 4218







Part #	1494	8689	8693
Description	Mini Add-A-Battery - 360 Panel	Triple Battery Bank - Traditional Metal	Triple Battery Bank - Traditional Metal
Nominal Voltage	12V DC	12V / 24V DC	12V / 24V DC
24-Hour Circuits		3 unswitched	4 unswitched
Circuit Breakers		1 × C-Series Flat Rocker, MAIN 100A 3 × Push Button Reset-Only - BRANCH 15A, spare apertures for additional breakers	1 × C-Series Flat Rocker, MAIN 100A 4 × Push Button Reset-Only- BRANCH 15A, spare apertures for additional breakers
Battery Switch	6011	2 × 6011	2 × 5511E
Automatic Charging Relay	7601		
Width x Height in (mm)	4.88 (123.83) × 7.75 (196.85)	7.25 (184.15) × 8.00 (203.20)	10.50 (266.70) × 8.00 (203.20)
Depth in (mm)	3.25 (82.55)	3.25 (82.55)	3.50 (88.90)
LEDs		ON Indicating LEDs in all circuits	ON Indicating LEDs in all circuits
Labels Included		24-hour Round Label Set & Square Format Label Set 4218	24-hour Round Label Set & Square Format Label Set 4218

# **L-Series Solenoid Switches**

150A or 250A switches are remotely activated using a low amp switch and smaller gauge wire

- Continuous duty, SPST Normally Open
- · Hermetically sealed contacts
- Activated by a remote ON-OFF switch 8230 sold separately (p. 92)
- · Coil control circuit minimizes heating and amperage draw

Part #	7765	9012
Description	150A L-Series Solenoid Switch	250A L-Series Solenoid Switch
Operating Temperature	-40°C to +85°C	-55°C to +85°C
Coil Circuit Connection	22 AWG Tinned Wire	20 AWG Tinned Wire
Voltage Nominal	12/24V DC	12/24V DC
Coil Function	Normally Open	Normally Open
Operating Current Changing State	3.8A	3.6A
Operating Current Continuous	0.13A @ 12V, 0.07A @ 24V	0.13A @ 12V, 0.07A @ 24V
Voltage Input	9V-36V DC	9V-36V DC
Terminal Studs	M8 (accepts 5/16" terminals)	M8 (accepts 5/16" terminals)
Terminal Stud Torque	90 in-lb (10 Nm) max.	90 in-lb (10 Nm) max.
Mounting Screws	#10 or M5	#10 or M5
Mounting Screw Torque	15-30 in-lb (1.7-3.4 Nm)	15-35 in-lb (1.7-4 Nm)
Weight	0.95 lb (0.43 kg)	0.9 lb (0.41 kg)
Contact Rating		
Continuous Rating	150A*	250A**
Intermittent Rating (5 min.)	225A*	275A**
Cranking Rating (30 sec.)	600A*	1000A**
Voltage Maximum	320V DC	800V DC



Regulatory

CE marked, IP67-protected against immersion up to 1 meter for 30 minutes (see inside back cover) Ignition protected - ISO 8846 and SAE J1171.


9012 ONLY - UL Certified - UL 508 Industrial Control Equipment




#### 9012 Wire Size and Current Ratings (50°C Ambient)

Wire Size	Cranking 30 sec.	Intermittent 5 min.	Continuous
1/0 AWG	1000A	275A	250A
2/0 AWG (70 mm²)	1000A	400A	300A

For the full list of specifications see page 52





# **TECH TIP**

#### **Solenoid vs Remote Battery Switch**

**Solenoid:** An electronic switch with no manual control, for circuits where a manual battery disconnect is offered elsewhere in the circuit.

7765

**Remote Battery Switch:** A solenoid or relay with a manual control switch allowing for switching if control circuit is compromised and for service lockout.



<sup>\*2</sup> AWG Cable in 50°C ambient

<sup>\*\*1/0</sup> AWG Cable in 50°C ambient

40 BATTERY MANAGEMENT bluesea.com

#### **ML-Series Solenoid Switches**

500A magnetic latching solenoid provides switching under load where manual control is not required



Remote Control Contura Switch included in retail package



Duetch DTM Cable End now offered for both retail and bulk units. Other connector plugs are available for high volume OEM applications.

- Silver alloy contacts provide high reliability for switching live loads
- LED output to remotely indicate switch state - requires optional LED (p. 153) or Remote Control Contura Switch with integrated LED (included in retail package)
- 3/8"-16 tin-plated copper studs for maximum conductivity and corrosion resistance
- One-piece stainless flange nuts for safe and secure connections
- · Label recesses for circuit identification
- Retail package includes Remote Control Contura Switch (p. 93)

Regulatory

CE marked, meets ISO 8846 and SAE J1171 external ignition protection requirements, IP66 - protected against powerful water jets (see inside back cover)

7701

ML MANUE SEA SOLENOID

# IGNITION PROTECTED

Part #	Contact Voltage	Control Voltage	Control Signal	Cable End
7701	0-64V	9-16V	12V Momentary	Stripped Wire
7701100	0-64V	9-16V	12V Momentary	Deutsch DTM
7703	0-64V	18-32V	24V Momentary	Stripped Wire
7703100	0-64V	18-32V	24V Momentary	Deutsch DTM
7718	9-16V	9-16V	12V Continuous	Stripped Wire
7718100	9-16V	9-16V	12V Continuous	Deutsch DTM
7719	18-32V	18-32V	24V Continuous	Stripped Wire
7719100	18-32V	18-32V	24V Continuous	Deutsch DTM

#### Wire Size and Current Ratings

Wire Size	Cranking 30 sec.	Intermittent 5 min.	Continuous (UL 1107)
2/0 AWG (70 mm²)	1,000A	400A	225A
4/0 AWG (120 mm²)	1,100A	400A	300A
2× 4/0 AWG (2x 120 mm²)	1,450A	700A	500A

For the full list of specifications see page 52 For the dimensioned drawing see page 43

# **m-LVD Low Voltage Disconnect**

Senses low battery voltage and disconnects non-critical loads, saving power to start engine





Remote Control Contura Switch included in retail package



- Status light provides warning of low voltage state prior to disconnect
- Alarm output for audible warning of low voltage state prior to disconnect (optional alarm required)
- One-piece stainless flange nuts for safe and secure connections
- · Remote Control Switch functions:
- Adjusts disconnect voltage
- Temporarily delays circuit disconnect for 10 minutes
- Temporarily disconnects circuits until voltage rises
- Silences alarm (optional alarm required)
- Retail package includes Remote Control Contura Switch 7928 (p. 93)

Part #	7635
Intermittent Rating: 5 min.	115A
Continuous Rating	65A
Nominal Voltage	12V DC
Cable Size (to meet current ratings)	6 AWG (16mm²)
Terminal Stud Size	1/4"-20 (M6)
Disconnect Voltage	11.3V-12.1V Adjustable
Reconnect Voltage	13V DC
Regulatory	Meets ISO 8846 and SAE J1171 external ignition protection requirements

# IGNITION PROTECTED

For the full list of specifications see page 53

#### **System Diagram**



#### **Related Products**



Paralleling Link Bus page 43 (see table)



Remote Control LEDs Contura Switches page 153 page 93



Stud Mount Insulators page 108







Floyd Bell Turbo Series Alarm page 152



LEDs page 153

# **Automatic Timer Disconnect (ATD)**

Select from 4 methods to manage your batteries: Timer Disconnect, Low Voltage Disconnect, Automatic Charging Relay, or Solenoid

- 12V signal triggers relay to connect battery power to devices
- When signal is removed the timer is activated and will disconnect devices after a preset time
- Timer ranges from 15 minutes to 4 hours
- Optional charge sense can be used instead of 12V signal to reduce wiring
- Test mode disconnects devices after 5 seconds to confirm relay and timer are operational

#### **Low Voltage Disconnect**

- · Senses low battery voltage and automatically disconnects devices to save power
- Adjustable voltage setting at 11.0V, 11.5V, or 12.0V
- Low voltage setting can be used in conjunction with timer disconnect
- · Low voltage will disconnect devices prior to preset time to preserve battery power

#### **Automatic Charging Relay**

- · Automatically combines two battery banks for charging off a single charging source (i.e. alternator)
- Isolates batteries when charging source is not present or discharging
- Single side sensing design only monitors the voltage of the start battery
- Ideal for auxiliary batteries that are AGM or larger than the start battery

#### Solenoid

• 12V signal will connect or disconnect relay without any time delay

Part #	7615
Nominal Voltage	12V DC
Input Voltage Range	9.5-16V
Continuous Rating	120A
Intermittent Rating: 5 min.	210A
Amperage Operating Current (Combine)	175mA
Amperage Operating Current (Open)	4mA
Cable Size (to meet current ratings)	1 AWG (50mm²)
Maximum Cable Size	1/0 AWG (50mm²)
Terminal Stud Size	3/8"-16 (M10)
Terminal Stud Torque	140 in-lb (15.82Nm)
Time Range	15 Minutes – 4 Hours
Regulatory	CE marked, Meets ISO 8846 and SAE J1171 external ignition protection requirements IP67-protected against immersion up to 1 meter for 30 minutes (see inside back cover)




For the full list of specifications see page 53













#### **Related Products**



MRBF Terminal page 68



LEDs page 153


42 BATTERY MANAGEMENT bluesea.com

# **Remote Battery Switches**

A Remote Battery Switch (RBS) is a 500A relay and remote control switch connected by small gauge single wire. High amperage switching is achieved with the relay mounted next to the batteries and controlled either manually by a switch on the remote battery switch or by the remote switch mounted in an accessible location. Read the TECH Tip, Solenoid vs Remote Battery Switch RBS Explained on page 39.

The installed cost of a remote battery compared to manual battery switch may not be that different. The cost savings from eliminating long runs of expensive large gauge battery cables and replacing them with light gauge control wires can often offset the cost of a remote battery switch.


#### **4 Position Selector Switch**

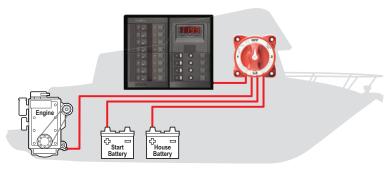

#### Traditional Battery Switch (40' of 4/0 AWG Cable)

- · Long runs of large cable create voltage drop
- · Decreased power to engine
- Increases weight
- More expensive

# ML-Series Remote Battery Switches and Automatic Charging Relay

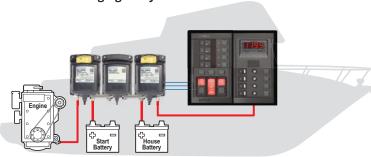


# Remote Battery Management with small control wire (5' of 4/0 AWG Cable)

- Minimizes cable run and voltage drop
- · Maximizes power to engine
- · Reduces weight
- Saves money

# **TECH TIP**

#### **Mastervolt Lithium Ion Battery System**

Mastervolt utilizes Blue Sea Systems ML Remote Battery Switches (ML-RBS) on their Lithium Ion Battery systems. The advanced Lithium Ion Batteries have a built in Battery Management System (BMS) with active cell balancing. The ML-RBS is utilized for its rapid ability to disconnect the batteries under full load. At any time the Mastervolt BMS can trigger the ML-RBS to safely disconnect the batteries. Once the system is restored the ML-RBS can be re-connected for quick operation. The latching operation of the ML-RBS means that no amperage is consumed during an open or closed state, which further prolongs the available power in the Lithium Ion Batteries. The override knob allows the ML-RBS to be manually disconnected for safe servicing of the battery system. With a rating of 500A continuous, the ML-RBS pairs perfectly with all of the Mastervolt Lithium Ion Batteries.

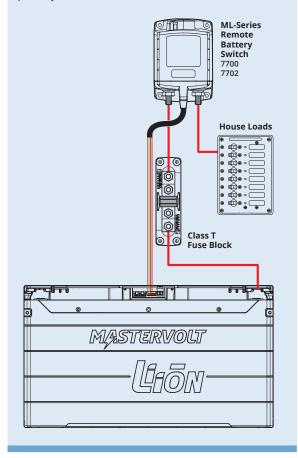

# **ML-Series Remote Battery Switches**

500A magnetic latching switch provides high amperage switching under load, manually or from remote locations

- Silver alloy contacts provide high reliability for switching live loads
- LED output to remotely indicate switch state requires optional LED (p. 153) or Remote Control Contura Switch with integrated LED (included in retail package)
- 3/8"-16 tin-plated copper studs for maximum conductivity and corrosion resistance
- One-piece stainless flange nuts ensure safe and secure connections
- · Label recesses for circuit identification
- Retail package includes a Remote Control Contura Switch (p. 93)

Terminal Stud Size	3/8"-16 (M10)
Maximum Terminal Stud Torque	140 in-lb (15.8 N•m)
Cable Size (to meet current ratings)	4/0 AWG (120mm²)
Terminal Ring Diameter Clearance	1.12" (28.4 mm)
Regulatory	CE marked, meets ISO 8846 and SAE J1171 external ignition protection requirements IP66 - protected against powerful water jets (see inside back cover)


# IGNITION PROTECTED

#### **Wire Size and Current Ratings**

Wire Size	Cranking 30 sec.	Intermittent 5 min.	Continuous (UL 1107)
2/0 AWG (70 mm <sup>2</sup> )	1,000A	400A	225A
4/0 AWG (120 mm²)	1,100A	400A	300A
2× 4/0 AWG (2x 120 mm²)	1,450A	700A	500A

Part #	Contact Voltage	Control Voltage	Signal Voltage	Cable End
7700	0-64V	9-16V	12V Momentary	Stripped Wire
7700100	0-64V	9-16V	12V Momentary	Deutsch DTM / Amphenol ATM
7702	0-64V	18-32V	24V Momentary	Stripped Wire
7702100	0-64V	18-32V	24V Momentary	Deutsch DTM / Amphenol ATM
7713	9-16V	9-16V	12V Continuous	Stripped Wire
7713100	9-16V	9-16V	12V Continuous	Deutsch DTM / Amphenol ATM
7717	18-32V	18-32V	24V Continuous	Stripped Wire
7717100	18-32V	18-32V	24V Continuous	Deutsch DTM / Amphenol ATM
9160	Paralleling li	nk bus		

For the full list of specifications see page 52





Remote Control Contura Switch included in retail package



Duetch DTM Cable End now offered for both retail and bulk units. Other connector plugs are available for high volume OEM applications.

#### **Related Products**



Paralleling Link Bus 9160 see table



ML-Series ACR page 51



Remote Control Switch 360 Panels page 94



LEDs page 153



Stud Mount Insulators page 108





# **TECH TIP**

#### **ML-Series Solenoid & RBS Rating**

A number of ML-Series Solenoids and Remote Battery Switches are rated to 64V DC, making them ideal for use in 36V DC and 48V DC nominally-rated systems. The 64V DC rating applies only to the contact voltage, while maintaining the existing 12V DC or 24V DC signal voltage, making them ideal for use in multivoltage systems like solar or golf-carts. The higher voltage rating was tested to 2,000 live-switching cycles at maximum operating voltage per UL 1107 requirements.


BATTERY MANAGEMENT bluesea.com

# **Intro to Automatic Charging Relays**

**Automatic Charging Relay Operation** 

#### BATTERY TERMINAL VOLTAGE

**LEGEND** 

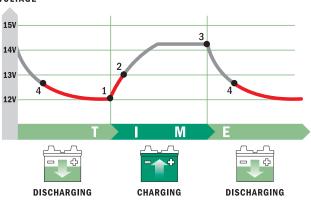

ACR OPEN - Batteries are isolated.

ACR COMBINED - Batteries are connected and are both charging.

- ACR relay is open and batteries are isolated. Voltage begins to rise slowly after engine starts or battery charger is turned on.
- 2. When voltage rises to COMBINE voltage 13.0V in this example, ACR relay closes, connecting and charging both batteries.
- 3. When engine stops or battery charger is turned off, voltage rapidly begins falling.
- 4. When voltage falls to ISOLATE voltage 12.75V in this example ACR relay opens, isolating batteries while discharging.





# **TECH TIP**

#### **Automatic Charging Relays**

In a boat or vehicle with two battery banks, it is useful to be able to charge both banks while underway. Charge management devices allow two battery banks to be charged from a single source, such as an alternator, but keep batteries isolated when not charging. If one battery becomes depleted, there will be a charged bank available for emergency starting.

#### There are two types of charge management devices:

Automatic Charging Relays (ACR) use a relay combined with a voltage sensing circuit. When a charge is being applied to a battery and the voltage rises over 13V DC, the relay closes and combines the two batteries. When the charge is taken away or the load on the battery is greater than the charging input causing the voltage to drop to 12.75V DC, the relay opens and isolates the two batteries.

#### Isolators

- 1. Battery Isolators are one-way electrical check valves that allow current to flow to, but not from, the battery. Their disadvantage is that they use diodes, which cause a voltage drop that consumes charging energy, creates heat, and causes batteries to be undercharged. Although alternators with external voltage sensing can correct for undercharging, voltage drop and heat remain a problem.
- Zero Drop Isolators have more recently been developed to address the voltage drop issue of the traditional isolator but often have a higher price than either of the other two options mentioned above.

#### **Automatic Charging Relay vs. Battery Isolator**


#### **Automatic Charging Relay**

Passes the current from one battery to the other resulting in a lower voltage drop than battery isolators. .05V Drop - Batteries Fully Charged



#### **Battery Isolator**

Splits the current between batteries. 6V Drop - Batteries Under Charged

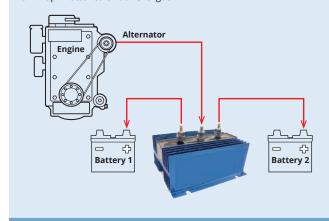

#### **Selection Chart**

Choose the right Automatic Charging Relay for your application

1. Select an ACR that has a Continuous rating above the maximum alternator output rating and an Intermittent rating that is above the largest load on the auxiliary battery.











2. Review the	PRESET	ACR SETTINGS
---------------	--------	--------------


3. Select the ACR with the desired **PRODUCT FEATURES** 

Part #	7601	7611	7610	7620	7622
Continuous	65A	120A	120A	500A	500A
Intermittent	115A	210A	210A	700A	700A

#### PRESET ACR SETTINGS

#### **Combine Voltage**

- Charge present and loads do not exceed charge input
- Voltage of either battery is ≥13.0V for 2 min.
- Relay will close, combining batteries
- Combined batteries share charge












#### **Open Voltage**

- No charge present or loads exceed charge input
- Combine voltage is ≤12.75V for 30 sec.
- Relay will open, isolating batteries
- Isolated batteries do not share charge












#### **Under Voltage Lockout**

- Charge may or may not be present
- Voltage of either battery is ≤9.5V (ML-ACR 9.6V)
- Relay will not close even with charge on other battery, protecting ACR and wiring from high surge current
- Isolated batteries do not share charge











#### **PRODUCT FEATURES**

#### **Auxiliary Battery Priority (optional)**

#### Condition: Engine running

- Open voltage is lowered to 12.25V from 12.75V
- Relay remains closed longer, combining batteries, to allow use of auxiliary loads for a longer period of time

# Auxiliary Start







#### Start Isolation (optional) **Condition: Engine starting**

#### - Relay is open, isolating batteries

- Batteries are isolated to protect sensitive electronics from voltage sags and spikes

#### ¢. ACR Start Auxiliary










#### Start Assist

#### Condition: Engine starting - (Press Contura Switch)

- Relay is closed, combining batteries
- Batteries are combined to share power in the event of a low start battery








#### **Engine Isolation**

#### Condition: Two engines are running - One relay is open and one relay is closed

- Engine 1 Start and Engine 2 Start batteries are isolated to protect engine electronics
- If requested by engine manufacturer







#### **Manual Override**

Manual override knob provides an added level of safely allowing manual control of ON-OFF





46 BATTERY MANAGEMENT bluesea.com

# **m**-ACR Automatic Charging Relay

#### **With Optional Start Isolation**


Automatically combines batteries during charging, isolates batteries when discharging and when starting engines


- · 65A continuous rating
- 12V/24V DC auto ranging voltage input
- Senses charging on two battery banks
- · Case design allows surface, rear, or front panel mounting options
- Snap-on cover insulates terminal connections
- One-piece stainless flange nuts ensure safe and secure connections
- Integrated LED indicates ACR states
- Quick connect terminals for ground and start isolation
- Optional Start Isolation allows temporary isolation of House loads from Engine circuit during engine cranking to protect sensitive electronics from sags and spikes


Part #	7601	
Intermittent Rating: 5 min.	115A	
Continuous Rating	65A	
Amperage Operating Current (Combine)	90mA	
Amperage Operating Current (Open)	15mA	
Nominal Voltage	12V / 24V DC	
Cable Size (to meet current ratings)	6 AWG (16mm <sup>2</sup> )	
Maximum Cable Size	1/0 AWG (50mm²)	
Terminal Stud Size	1/4"-20 (M6)	
Terminal Stud Length	7/16" (11 mm)	
Relay Contact Position	12V DC	24V DC
Combine (30 sec.)	13.6V DC	27.2V DC
Combine (2 min.)	13.0V DC	26.0V DC
Open (10 sec.)	12.35V DC	24.7V DC
Open (30 sec.)	12.75V DC	25.5V DC
Over Voltage Lockout	16.0V DC	
Under Voltage Lockout	9.5V DC	19.0V DC
Under Voltage Recovery	10.0V DC	20.0V DC
Regulatory	CE marked, ISO 8846, meets SAE J1171 external ignition protection requirements IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)	


# IGNITION PROTECTED

For the full list of specifications see page 53













#### **Mounting Options**





m-Series Battery Switch page 30



Mini Add-A-Battery 360 Panel page 38



Mini Add-A-Battery page 48



MRBF Terminal Fuse Blocks page 68



WeatherDeck OFF-ON Toggle Switch page 96

# **SI-ACR Automatic Charging Relay**

#### **With Optional Start Isolation**

Automatically combines batteries during charging, isolates batteries when discharging and when starting engines

- 120A continuous rating to support high output alternators
- 12V/24V DC auto ranging voltage input
- · Senses charging on two battery banks
- Side and bottom knockouts for cable connections
- Clip-on cover insulates terminal connections
- Studs accept multiple cable terminals
- One-piece stainless flange nuts ensure safe and secure connections
- Integrated LED indicates ACR status
- · Quick connect terminals for ground and optional features
- Optional Start Isolation allows temporary isolation of House loads from Engine circuit during engine cranking to protect sensitive electronics from sags and spikes
- Remote LED indicates ACR states requires optional LED (p. 153)

Part #	7610	
Intermittent Rating: 5 min.	210A	
Continuous Rating	120A	
Amperage Operating Current (Combine)	175mA	
Amperage Operating Current (Open)	15mA	
Nominal Voltage	12V / 24V DC	
Cable Size (to meet current ratings)	1 AWG (50mm²)	
Maximum Cable Size	1/0 AWG (50mm <sup>2</sup> )	
Terminal Stud Size	3/8"-16 (M10)	
Relay Contact Position	12V DC	24V DC
Combine (30 sec.)	13.6V DC	27.2V DC
Combine (2 min.)	13.0V DC	26.0V DC
Open (10 sec.)	12.35V DC	24.7V DC
Open (30 sec.)	12.75V DC	25.5V DC
Over Voltage Lockout	16.0V DC	30.0V DC
Under Voltage Lockout	9.5V DC	19.0V DC
Under Voltage Recovery	10.0V DC	20.0V DC
Regulatory	CE marked, ISO 8846, meets UL 1500 and SAE J1171 external ignition protection requirements IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)	





For the full list of specifications see page 53 For the dimensioned drawing see page 41



€-Series Battery Switch page 32



Add-A-Battery page 48



MRBF Terminal Fuse Blocks page 68



WeatherDeck OFF-ON Toggle Switch page 96



LEDs page 153

48 **BATTERY MANAGEMENT** bluesea.com

# Mini Add-A-Battery Kit

Simplifies switching and automates charging for a 65A, two battery bank solution for outboard powered boats

- For alternators up to 65A
- Includes the m-Series Dual Circuit Plus Battery Switch 6011 (p. 30) and the m-ACR Automatic Charging Relay 7601 (p. 46)

#### m-Series Dual Circuit Plus™ Battery Switch

- · Switches two battery banks simultaneously while maintaining battery bank isolation
- · Can combine two battery banks in the event of a low start battery
- IP66 protected against powerful water jets (see inside back cover)

#### m-ACR Automatic Charging Relay

- · Automatically combines battery banks when charging and isolates when discharging
- Start isolation protects sensitive electronics
- · Dual Sensing senses charge on two battery banks
- IP67 protected against immersion up to 1 meter for 30 minutes (see inside back cover)

Part #	Description	Retail Package
7649	Mini Add-A-Battery Kit	Clam
7649003	Mini Add-A-Battery Kit	Box

# BLUE SEA 7649 7649003

#### Related Products

VIDEO (







m-ACR page 46



WeatherDeck OFF-ON Toggle Switch page 96



Add-A-Battery 360 Panel page 38

# **Add-A-Battery Kit**

Simplifies switching and automates charging for a 120A, two battery bank solution for inboard and outboard powered boats

- For alternators up to 120A
- Includes the e-Series Dual Circuit Plus Battery Switch 5511E (p. 32) and the SI-ACR Automatic Charging Relay 7610 (p. 47)

#### **C-Series Dual Circuit Plus™ Battery Switch**

- · Switches two battery banks simultaneously while maintaining battery bank isolation
- · Can combine two battery banks in the event of a low start battery
- IP66 protected against powerful water jets (see inside back cover)

#### **SI-ACR Automatic Charging Relay**

- · Automatically combines battery banks when charging and isolates when discharging
- · Start isolation protects sensitive electronics
- Dual Sensing senses charge on two battery banks
- IP67 protected against immersion up to 1 meter for 30 minutes (see inside back cover)

Part #	Description	Retail Package
7650	Add-A-Battery Kit	Clam
7650003	Add-A-Battery Kit	Box







#### Related Products



€-Series **Battery Switch** page 47 page 32

SI-ACR



MRBF Terminal Fuse Blocks page 68



WeatherDeck OFF-ON Toggle Switch page 96

# **TECH TIP**


#### **Add-A-Battery Kits Explained**

Avoid the inconvenience and cost of a tow by adding a second battery to your electrical system.


The Add-A-Battery Kits include a Dual Circuit Plus™ Battery Switch and an Automatic Charging Relay. These components simplify switching and automate charging. Simply turn the battery switch ON when you arrive and OFF when you leave.

Adding a second battery prevents getting stranded with a dead battery by isolating the Start battery from the House loads that can quickly discharge a battery. The Add-A-Battery Kits offer a simple way to control switching with the Dual Circuit Plus™ Battery Switch and automatically shares a single source of charging between two batteries with the Automatic Charging Relay.

#### **Engine On**

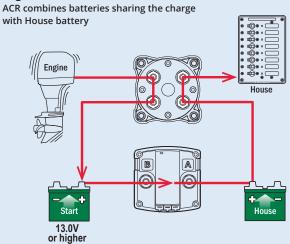

#### **Engine Off**

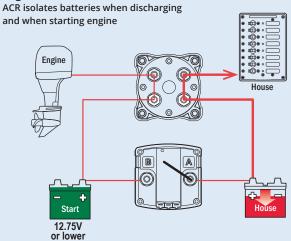

# DC Current

The diagrams above illustrate how the 7650 and 7649 Add-A-Battery Kits work and are intended for reference only. Consult an ABYC certified marine electrical professional for system design and circuit protection.

# **Mini Add-A-Battery Plus Kits**

A complete small boat battery management system. Charge two batteries at or away from the dock

- For alternators up to 65A
- Includes an m-Series Dual Circuit Plus™ Battery Switch 6011 (p. 30) and a BatteryLink® Charger (p. 22)

#### m-Series Dual Circuit Plus Battery Switch

- Switches two battery banks simultaneously while maintaining battery bank isolation
- Can combine two battery banks in the event of a low start battery
- IP66 protected against powerful water jets (see inside back cover)

#### **BatteryLink Charger**

- Integrated ACR provides DC charging from engine alternator
- · AC plug-in while at the dock
- Battery temperature compensation prolongs battery life
- · Includes a remote LED indicator
- · Start isolation protects sensitive electronics
- IP67 protected against immersion up to 1 meter for 30 minutes (see inside back cover)

Part #	Description	Plug Style
7655	Mini Add-A-Battery Plus Kit	North American: NEMA 5-15P





For the AC & DC Battery Charging Explained TECH Tip see page 22





50 BATTERY MANAGEMENT bluesea.com

# **BatteryLink® Automatic Charging Relay (ACR)**

#### **With Optional Auxiliary Battery Priority**

Automatically shares single source of charge with Auxiliary Battery

- 120A continuous rating to support high output alternators
- 12V/24V DC auto ranging voltage input
- · Senses charging on two battery banks
- Side and bottom knockouts for cable connections
- Clip-on cover insulates terminal connections
- Studs accept multiple cable terminals
- One-piece stainless flange nuts ensure safe and secure connections
- · Integrated LED indicates ACR status
- Quick connect terminals for ground and optional features
- Optional Auxiliary Battery Priority connection shares the alternator charge with the Auxiliary battery longer when the engine is running to allow the use of auxiliary loads for an extended period of time
- Remote LED remotely indicates ACR states requires optional LED (p. 153)

Part #	7611	
Intermittent Rating: 5 min.	210A	
Continuous Rating	120A	
Amperage Operating Current (Combine)	175mA	
Amperage Operating Current (Open)	15mA	
Nominal Voltage	12V / 24V DC	
Cable Size (to meet current ratings)	1 AWG (50mm <sup>2</sup> )	
Maximum Cable Size	1/0 AWG (50mm²)	
Terminal Stud Size	3/8"-16 (M10)	
Maximum Battery Size	850 CCA	
Relay Contact Position	12V DC	24V DC
Combine (30 sec.)	13.6V DC	27.2V DC
Combine (2 min.)	13.0V DC	26.0V DC
Open Low (30 sec.)	12.75V DC	25.5V DC
Over Voltage Lockout	16.0V DC	
Optional Auxiliary Priority		
Open Low (30 sec.)	12.25V DC	24.5V DC
Regulatory	CE marked, ISO 8846, UL 1500, meets SAE J1171 external ignition protection requirements IP67 - protected against immersion up to 1 meter for 30 minutes (see inside back cover)	





#### PROTECTED

For the full list of specifications see page 53 For the dimension drawing see page 41









MRBF Terminal Fuse Blocks page 68



WeatherDeck OFF-ON Toggle Switch page 96



LEDs page 153

ENGINE

ML-ACR

ENGINE

# **ML-Series Automatic Charging Relays (ACR)**

500A magnetic latching relay automatically combines batteries during charging and isolates batteries when discharging and when starting engine

- Magnetic Latching (ML) relay draws very low current in the ON state
- Start Isolation (SI) can be configured for temporary isolation of House loads from Engine circuit during engine cranking to protect sensitive electronics
- Engine Isolation (EI) can be configured for isolation of two engines while both are running to protect engine electronics and maximize alternator output
- Manual override knob provides an added level of safety allowing control with or without power and offering LOCKED OFF capability for servicing
- · Senses charging on two battery banks
- LED output to remotely indicate switch state requires optional LED (p. 153) or Remote Control Contura Switch with integrated LED (included in retail package)
- 3/8"-16 tin-plated copper studs for maximum conductivity and corrosion resistance
- One-piece stainless flange nuts ensure safe and secure connections Silver alloy contacts provide high reliability for live switching
- Retail packaging includes a Remote Control Contura Switch (p. 93)

Live Current Switching	300A @ 12V DC-10,000 Cycles		
Relay Contact Position	12V DC	24V DC	
Combine (30 sec.)	13.5V DC	27.0V DC	
Combine (2 min.)	13.0V DC	26.0V DC	
Open (10 sec.)	12.35V DC	24.7V DC	
Open Low (30 sec.)	12.75V DC	25.5V DC	
Over Voltage Lockout	16.2V DC	32.4V DC	
Under Voltage Lockout	9.6V DC	19.2V DC	
Under Voltage Recovery	10.0V DC	20.0V DC	
Regulatory	CE marked, meets ISO 8846 and SAE J1171 external ignition protection requirements IP66 - protected against powerful water jets (see inside back cover)		



Remote Control Contura Switch included in retail package



IGNITION PROTECTED

#### **Wire Size and Current Ratings**

Wire Size	Cranking 30 sec.	Intermittent 5 min.	Continuous (UL 1107)
2/0 AWG (70 mm²)	1,000A	400A	225A
4/0 AWG (120 mm²)	1,100A	400A	300A
2× 4/0 AWG (2x 120 mm²)	1,450A	700A	500A

Part #	Coil Volts	Cable End	Manual Control
7620	12V DC	Stripped Wire	No
7620100	12V DC	Deutsch DTM / Amphenol ATM	No
7622	12V DC	Stripped Wire	Yes
7622100	12V DC	Deutsch DTM / Amphenol ATM	Yes
7621	24V DC	Stripped Wire	No
7621100	24V DC	Deutsch DTM / Amphenol ATM	No
7623	24V DC	Stripped Wire	Yes
7623100	24V DC	Deutsch DTM / Amphenol ATM	Yes

For the full list of specifications see page 53 For the dimension drawing see page 43



Duetch DTM Cable End now offered for both retail and bulk units. Other connector plugs are available for high volume OEM applications.



MI -Series Remote Battery Switches páge 43



MRRF Terminal Fuse Blocks page 68



Remote Control Switch 360 Panels page 94



Paralleling Link Bus page 43 (see table)



I FDs page 153




Stud Mount Insulators page 108



BATTERY MANAGEMENT bluesea.com

# **Solenoid and Remote Battery Switch Specification Table**

52

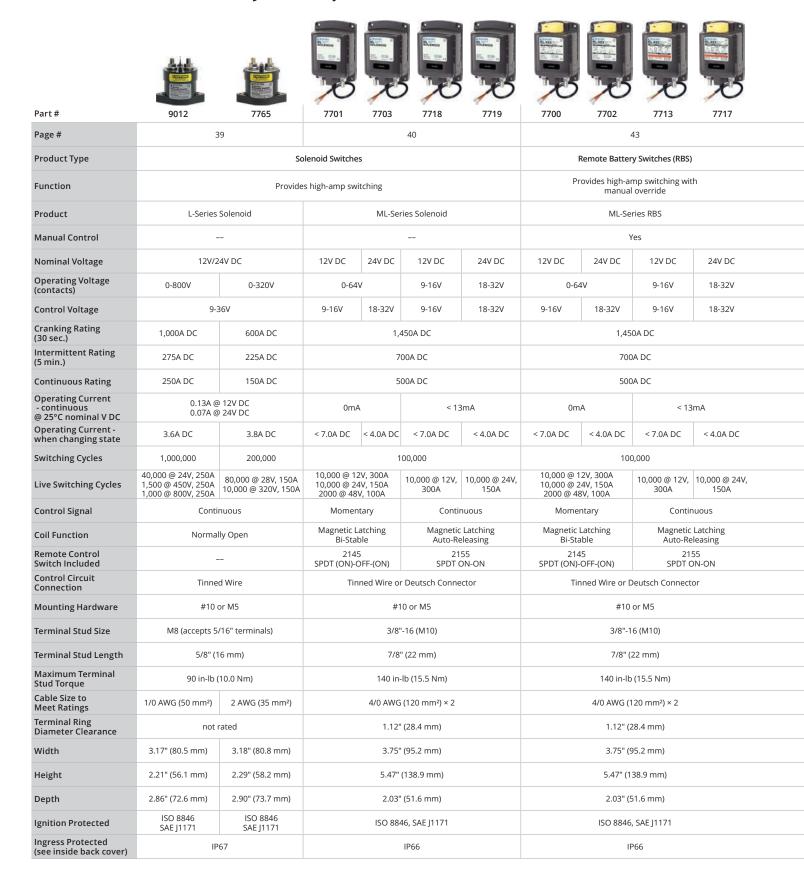

# Non-Critical Load Disconnect and Automatic Charging Relay Specification Table

	RIVERA .		DINN FO	DINA PA	NAME OF THE PARTY			
7635	7615	7601	7610	7611	7620	7622	7621	7623
40	41	46	47	50		ţ	51	
	oad Disconnects			Autor	matic Charging Relay	rs (ACR)		
Disconnects non- critical loads after a set voltage	Disconnects non- critical loads after a set time		A	llows charging of mu	ultiple batteries fron	n a single charge sou	rce	
m-LVD	ATD	m-ACR	SI-ACR	BatteryLink ACR		ML-Se	ries ACR	
						Yes		Yes
12'	V DC		12V/24V DC		12V	DC	24	4V DC
						1,45	0A DC	
115A DC	210A DC	115A DC	210	A DC		700	A DC	
65A DC	120A DC	65A DC	65A DC 120A DC			500	A DC	
4mA open 95mA connected	15mA open 175mA connected	15mA open 15mA open 90mA combined 175mA combined			< 1	3mA		
				< 7.0A DC < 4.0A DC		.0A DC		
				100,000				
				<del></del>				
		Normally Open				Magnetic Lat	ching Bi-Stable	
SPDT (ON)-OFF-(ON)					2146 SPDT ON-OFF-ON			
(014)-077-(014)	1/4" Quick Connect Tinned Wire or Deutsch Connector							
#10 or M5	#8 or M4	#10 or M5	#8 01	r M4		#10	or M5	
1/4"-20 (M6)	3/8"-16 (M10)	1/4"-20 (M6)	3/8"-16	5 (M10)		3/8"-1	6 (M10)	
7/16" (11 mm)	7/8" (22 mm)	7/16" (11 mm)	7/8" (22 mm)			7/8" (2	22 mm)	
60 in-lb (6.8 Nm)	140 in-lb (15.8 Nm)	60 in-lb (6.8 Nm)				140 in-lb	(15.8 Nm)	
6 AWG (16 mm²)	1/0 AWG (50 mm²)	6 AWG (16 mm²)	1/0 AWG	(50 mm²)		4/0 AWG (1	20 mm²) × 2	
0.80" (20.3 mm)	1.05" (26.7 mm)	0.80" (20.3 mm)	1.05" (26	5.7 mm)		1.12" (2	28.4 mm)	
2.85" (72.3 mm)	3.89" (98.7 mm)	2.85" (72.3 mm)	3.89" (98	3.7 mm)	3.75" (95.3 mm)			
2.85" (72.3 mm)	3.50" (89.0 mm)	2.85" (72.3 mm)	3.50" (89	9.0 mm)		5.47" (1	38.9 mm)	
2.57" (65.2 mm)	1.98" (50.3 mm)	2.57" (65.2 mm)	1.98" (50	0.3 mm)		2.03" (5	51.6 mm)	
,	, ,				ISO 8846, SAE J1171			
ISO 8846 SAE J1171	ISO 8846 SAE J1171	ISO 8846 SAE J1171	ISO 8846 SAE J	, UL1500 1171		ISO 8846	, SAE J1171	

# CIRCUIT PROTECTION & SWITCHES

#### **Fuses**

#### **Fuses Holders**

#### **Fuse Blocks**

#### ST-Blade Water-Resistant Fuse Block

## Circuit Breaker Blocks



56

For .25A to 750A circuit protection.



60

In-line fuse holders are compact and hold a single low-amperage fuse.



61

Fuse blocks mount to a solid surface and may hold a single fuse or multiple fuses.



62

Provides water-resistant circuit protection for ATO/ATC fuses & circuit breakers in a compact footprint.



7

Innovative block designed for Push-Button CLB Circuit Breakers with quick connect terminals.



# **CIRCUIT PROTECTION & SWITCHES**

# ATO/ATC-Style Circuit Breakers

Use a manually

resettable circuit

breaker instead of

an ATO or ATC fuse.

Thermal Circuit Breakers



78


Circuit breakers offer the ability to reset instead of replace the device after a fault.



81

**UL-489** 

Expanded line of circuit breakers that meet CFR 46 / Coast Guard requirements.





88


Panel enclosure for ELCI Main circuit breakers and other large frame devices.

**Switches** 



92

Switching options for different apertures and configurations.

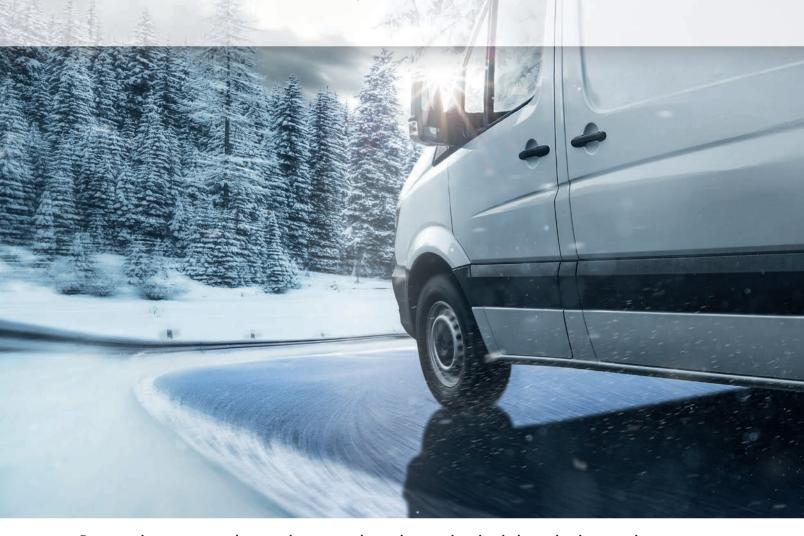

#### Best practices recommend every wire, except the engine starting circuit, have circuit protection.

When excessive current flows in an electrical circuit, wire insulation can melt and possibly start a fire. Circuit breakers and fuses protect the wire in electrical circuits. Blue Sea Systems' selection of circuit breakers, fuses, fuse holders, and fuse blocks offer a range of choices for main and branch circuit protection. To help in the selection process, Blue Sea Systems developed the Circuit Wizard to determine the correct size wire and fuse or circuit breaker for the application. Go to circuitwizard.bluesea.com to download the app.

56 **CIRCUIT PROTECTION** bluesea.com

# **TECH TIP**

#### **Color Coding**

The circuit protection color coded packaging matches fuses with the corresponding fuse holder or fuse block for easier component selection. Look for color rectangles on the packaging of each fuse holder and fuse block, and match the color with the fuse packaging to find the correct fuse type. Some fuse blocks require two different fuse types.



# **CIRCUIT WIZARD**

#### **Determine Your Circuit Requirements**

Use the Blue Sea Systems Circuit Wizard to select the correct wire size, circuit breaker, or fuse and fuse holder.

www.circuitwizard.bluesea.com



# **GMA®** and AGA® Fuses

#### Fast-acting glass fuses

- · Visible indication of blown condition
- Used for 12V/24V DC applications

Blow Time Delay See bluesea.com





Part #	Fuse Type	Amps	DC Volts	AC Volts	Retail Pack
5280	GMA	1A	24V DC	250V AC	3
5281	GMA	2A	24V DC	250V AC	3
5282	GMA	3A	24V DC	250V AC	3
5283	GMA	5A	24V DC	125V AC	3
5284	GMA	7A	24V DC	125V AC	3
5285	GMA	10A	24V DC	125V AC	3
5275	AGA	20A	32V DC		5

Protect your boat with the correct size wire and fuse, see p. 159

# **AGC® and MDL® Fuses**

AGC - Fast-acting glass fuses MDL - Slow-blow glass fuses

· Visible indication of blown condition

Voltage Max. Operating 32V DC / See table for AC Blow Time Delay See bluesea.com

250V AC

250V AC

250V AC

250V AC 5

250V AC 25

250V AC 5

250V AC 25

5

25

5

25

5

25

5

25

5

40



#### **AGC Fuses**

5210100

6A

7A

7.5A

7.5A

10A

10A

15A

15A

20A

25A

25A

30A

30A

1A, 3A, 5A,

1A, 2A, 3A, 5A, 7.5A, 10A,15A. 20A, 25A.

10A,15A

4 each

5211

5212

5213

5215

5217

5218

5219

5220

5288

5289

5213100

5215100

5217100

5218100

5219100

5220100

#### **MDL Fuses**

Part#	Amps	Volts	Retail Pack	Part #	Amps	Volts	Retail Pack
5202	.5A	250V AC	5	5226	3A	250V AC	2
5204	1A	250V AC	5	5227	5A	250V AC	2
5204100	1A	250V AC	25	5228	6.25A	250V AC	2
5205	1.5A	250V AC	5	5229	7.5A	250V AC	2
5206	2A	250V AC	5	5230	10A		2
5206100	2A	250V AC	25	5231	15A		2
5207	2.5A	250V AC	5	5232	20A		2
5208	3A	250V AC	5	5233	25A		2
5208100	3A	250V AC	25	5234	30A		2
5209	4A	250V AC	5				
5210	5A	250V AC	5				



5289 Includes a Heavy Duty In-Line Fuse Holder 5063 p. 60

#### **Related Products**







**Fuse Blocks** page 61

Protect your boat with the correct size wire and fuse, see p. 159

bluesea.com CIRCUIT PROTECTION 57

#### **ATM®** Fuses

#### Mini blade-type fuse

- · Color-coded for easy identification
- Visible indication of blown condition
- Tin-plated connector blades for corrosion resistance

Interrupting Capacity	1,000A
Voltage Max. Operating	32V DC
Blow Time Delay	See bluesea.com

Part #	Amps	Retail Pack
5261	2A	2
5262	3A	2
5263	4A	2
5270	5A	2
5264	7.5A	2
5271	10A	2
5272	15A	2
5273	20A	2
5265	25A	2
5274	30A	2
5286	5A, 10A, 15A, 20A, 30A	5

Protect your boat with the correct size wire and fuse, see p. 159

#### **ATO® or ATC® Fuses**

#### Fast-acting blade fuse

- · Color-coded for easy identification
- Visible indication of blown condition
- Tin-plated connector blades for corrosion resistance

Interrupting Capacity	1,000A
Voltage Max. Operating	32V DC
Blow Time Delay	See bluesea.com

Part #	Amps	Retail Pack
I di C #	Allips	Tuck
5235	1A	2
5236	2A	2
5237	3A	2
5238	4A	2
5239	5A	2
5240	7.5A	2
5241	10A	2
5242	15A	2
5243	20A	2
5244	25A	2
5245	30A	2
5246	40A	2
5287	5A, 10A, 15A, 20A, 25A, 30A	6

Part #	Amps	Retail Pack
5235100	1A	25
5236100	2A	25
5237100	3A	25
5239100	5A	25
5240100	7.5A	25
5241100	10A	25
5242100	15A	25
5243100	20A	25
5244100	25A	25
5245100	30A	25

Protect your boat with the correct size wire and fuse, see p. 159

#### **Related Products**







ST-Blade Fuse Blocks page 62-67



SafetyHub Fuse Blocks page 71



WeatherDeck Waterproof Fuse Panels page 115

# easyID<sup>™</sup> ATC<sup>®</sup> Fuses

Fast-acting easyID™ illuminated blade fuses use Light Emitting Diode (LED) technology to show when a fuse has blown

- Color-coded for easy identification
- · Visible indication of blown condition
- Tin-plated connector blades for corrosion resistance

Interrupting Capacity	1,000A
Voltage Max. Operating	32V DC
Blow Time Delay	See bluesea.com

Part #	Amps	Retail Pack
5291	3A	2
5292	5A	2
5293	7.5A	2
5294	10A	2
5295	15A	2
5296	20A	2
5297	25A	2
5298	30A	2
5299	40A	2
5290	3x 3A, 3x 5A, 3x 7.5A, 3x 10A, 6x 15A, 3x 20A, 3x 25A, 3x 30A, 3x 40A	30



5290

Protect your boat with the correct size wire and fuse, see p. 159

#### **MAXI®** Fuses

Provides economical branch circuit protection

- · Color-coded for easy identification
- Silver-plated connector blades for corrosion resistance
- · Visible indication of blown condition

Interrupting Capacity	1,000A
Voltage Max. Operating	32V DC
Blow Time Delay	See bluesea.com

Part#	Amps	Retail Pack
5138	30A	1
5139	40A	1
5140	50A	1
5141	60A	1
5142	70A	1
5143	80A	1

Protect your boat with the correct size wire and fuse, see p. 159



MAXI In-Line Fuse Holder p. 60



MAXI Fuse Block p. 61

58 CIRCUIT PROTECTION bluesea.com

# AMI® or MIDI® Fuses

Compact fuse for main or branch 30A to 200A circuit protection

- · Color-coded for easy identification
- · Visible indication of blown condition
- Tin-plated connector blades for corrosion resistance



Interrupting Capacity	5,000A @ 16V DC 2,000A @ 32V DC
Voltage Max. Operating	32V DC
Regulatory	Meets SAE J1171 external ignition protection requirements when used with Blue Sea Systems' fuse blocks, IP66 – protected against powerful water jets (see inside back cover)

# IGNITION PROTECTED

Part #	Amps	Color	Retail Pack
5250	30A	Orange	2
5251	40A	Green	2
5252	50A	Red	2
5253	60A	Yellow	2
5254	70A	Brown	2
5255	80A	White	2
5256	100A	Blue	2
5257	125A	Pink	2
5258	150A	Lt Blue	2
5259	175A	Tan	2
5260	200A	Purple	2

#### **Related Products**



Safety Fuse Block 7720 p. 70



SafetyHub Fuse Blocks p. 71

#### **MEGA® or AMG® Fuses**

Economical fuse for 100A to 300A circuit protection

Interrupting Capacity	1,000A
Voltage Max. Operating	32V DC
Trip Time Delay	See bluesea.com
Regulatory	Meets SAE J1171 external ignition protection requirements when used with Blue Sea Systems' Safety Fuse Block 7721 IP66 – protected against powerful water jets (see inside back cover)

#### IGNITION PROTECTED

Part#	Amps	Retail Pack
5101	100A	1
5102	125A	1
5103	150A	1
5104	175A	1
5105	200A	1
5107	250A	1
5108	300A	1

Protect your boat with the correct size wire and fuse, see p. 159

#### **Related Products**







page 70

**MRBF Fuses** 

MRBF—Marine Rated Battery Fuse Space-saving ignition protected fuse for 30A to 300A loads. Must use with MRBF Fuse Blocks (p. 68)

- · Color-coded for easy identification
- · Visible indication of blown condition

Interrupting Capacity	10,000A @ 14V DC 5,000A @ 32V DC 2,000A @ 58V DC
Voltage Max. Operating	58V DC
Fuse Hole Opening	M8 (5/16")
Trip Time Delay	See bluesea.com
Regulatory	Meets SAE J1171 external ignition protection requirements, IP66 – protected against powerful water jets

## IGNITION PROTECTED

**ABYC E-11.10.1.1.1.** Overcurrent Protection Device Location - Ungrounded conductors shall be provided with overcurrent protection within a distance of seven inches (175mm) of the point at which the conductor is connected to the source of power measured along the conductor

Part #	Amps	Color	Retail Pack
5175	30A	LT Green	1
5176	40A	LT Blue	1
5177	50A	Red	1
5178	60A	Gold	1
5180	75A	Brown	1
5181	80A	Lime	1
5182	90A	Purple	1
5183	100A	Yellow	1
5184	125A	Green	1
5185	150A	Orange	1
5186	175A	White	1
5187	200A	Blue	1
5189	250A	Pink	1
5190	300A	Gray	1

Protect your boat with the correct size wire and fuse, see p. 159






MRBF Fuse Blocks page 68

#### **Class-T Fuses**

High interrupt capacity for large battery banks including Lithium-Ion and TPPL batteries



· Recommended by most inverter manufacturers

Interrupting Capacity	20,000A @ 125V DC
Voltage Max. Operating	125V DC
Trip Time Delay	See bluesea.com
Regulatory	UL listed to standard 248-15


Part #	Amps	Retail Pack
5112	110A	1
5113	125A	1
5114	150A	1
5115	175A	1
5116	200A	1
5117	225A	1
5118	250A	1
5119	300A	1
5120	350A	1
5121	400A	1


Protect your boat with the correct size wire and fuse, see p. 159

#### **Related Products**



Class-T Fuse Blocks page 69





#### **ANL Fuses**

For 35A to 750A circuit protection



· Visible indication of blown condition

Interrupting Capacity	6,000A @ 32V DC
Voltage Max. Operating	32V DC
Trip Time Delay	See bluesea.com
Regulatory	<b>35-500A ONLY</b> – Meets SAE J1171 external ignition protection requirements


# IGNITION PROTECTED

Part#	Amps	Retail Pack	Part #	Amps	Retail Pack
5164	35A	1	5129	200A	1
5165	40A	1	5131	250A	1
5122	50A	1	5133	300A	1
5123	60A	1	5135	350A	1
5124	80A	1	5136	400A	1
5125	100A	1	5137	500A	1
5126	130A	1	Not Ignit	ion Prot	ected
5127	150A	1	5161	600A	1
5128	175A	1			1
			5163	750A	I

Protect your boat with the correct size wire and fuse, see p. 159  $\,$ 



ANL Fuse Blocks page 69

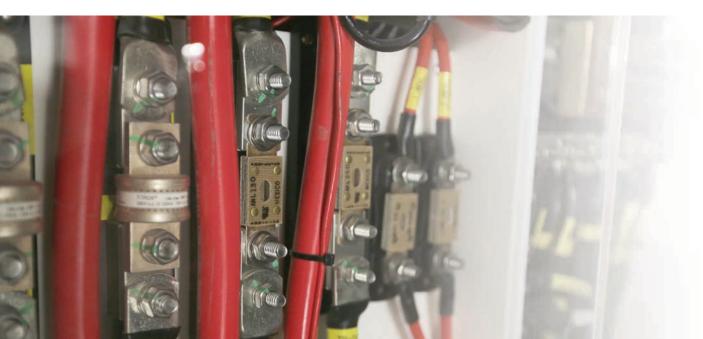

60 **CIRCUIT PROTECTION** bluesea.com

#### AGC® or MDL® In-Line Fuse Holders

#### Crimpable In-Line Fuse Holder

- Accepts 12-16 AWG wire
- 30A Max. fuse amperage
- Fuse sold separately (p. 56)

Part#	Description
5060	AGC or MDL In-Line Fuse Holder

#### Waterproof In-Line Fuse Holder

- · Accepts 12-18 AWG wire
- 30A Max. fuse amperage
- Fuse sold separately (p. 56)



Part #	Description
5061	Waterproof In-Line Fuse Holder

#### Waterproof In-Line Fuse Holder

- · Accepts 12-16 AWG wire
- 20A Max. fuse amperage
- Fuse sold separately (p. 56)



Part#	Description
5062	Waterproof In-Line Fuse Holder

#### Heavy Duty In-Line Fuse Holder

- · Accepts 12-18 AWG wire
- 30A Max. fuse amperage
- Fuse sold separately (p. 56)



Part #	Description
5063	Heavy Duty In-Line Fuse Holder

#### Water-Resistant Fuse Holder **Panel Mount**

- Rated IP66 on front protected against powerful water jets
- · 20A Max. fuse amperage
- 0.50" (12.70 mm) mounting hole
- Fuse sold separately (p. 56)

5022 Replacement cap for 5021



Part #	Description
5021	Water-Resistant Panel Mount Fuse Holder
5022	Replacement Cap

#### **Related Products**





AGC Fuses page 56

MDL Fuses page 56

#### ATO® or ATC® In-Line Fuse Holders

#### In-Line Fuse Holder

- · Supplied with 12 AWG pigtails
- 30A Max. fuse amperage
- Fuse sold separately (p. 57)



#### Waterproof In-Line Fuse Holder

- Supplied with 12 AWG pigtails
- · 30A Max. fuse amperage
- Fuse sold separately (p. 57)



Part #	Description
5064	ATO or ATC In-Line Fuse Holder
5065	ATO or ATC Waterproof In-Line Fuse Holder

#### **Related Products**







MAXI® In-Line Fuse Holder

In-line fuse holder for MAXI Fuses



- Supplied with 5 inch #6 lead wires and two adhesive lined sealing shrink wrap tubes for sealed terminations
- Firewall mounting hole permits two or more holders to be mounted together
- Protective cover with retaining strap
- Fuse sold separately (p. 57)

Voltage Max. Operating	32V DC
Amperage Max. Continuous	8A
Fuse Max. Amperage	60A
Mounting Hole	1/4", m6, or #12 Screws

Part #	Description
5068	MAXI In-Line Fuse Block



MAXI Fuses page 57

bluesea.com CIRCUIT PROTECTION 61

#### **MAXI®** Fuse Block

Ignition protected fuse block allows for installation in a gasoline engine compartment



NOTE: 5006100 replaces 5006


- Snap-on terminal cover insulates all conductive parts, satisfying ABYC/USCG requirements
- · Cover breakouts allow wires from sides or bottom
- Terminal screws compress fuse blades within blocks for low resistance connections
- Label recess accepts large format label (p. 154)
- Fuses sold separately (p. 57)

Voltage Max. Operating	32V DC
Amperage Max. Operating	80A
Wire Size	14-4 AWG
MAXI® Fuses available	30A-80A
Screw Terminal Torque	25 in-lb
Mounting	#10 Screws
Regulatory	CE & UKCA certified, meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is securely latched and all mounting screws are installed.

# IGNITION PROTECTED

Part #	Description
5006100	MAXI Fuse Block

For the full list of specifications see page 73  $\,$ 



#### **Related Products**



#### **ST-Glass Fuse Blocks**

Innovative design allows for labeling, spare fuse storage, and easy fuse removal




5015

- · Can be used for 24-hour circuits
- · Screw terminals for securing wires
- Integrated fuse ejector levers
- Clear insulating cover satisfies ABYC/USCG insulation requirements, accepts Large Format Labels (p. 154), and provides storage for spare fuses
- Tin-plated phosphor bronze fuse clips are encapsulated and cannot be sprung
- One-piece stainless flange nuts ensure safe and secure connections
- Fuses sold separately (p. 56)

Voltage Max. Operating	32V DC
Amperage Max. Operating	30A per circuit
Amperage Max. Operating	100A per block
Fuse Type	AGC or MDL Fuses
Screw Terminal	#8-32 with captive star lock washer
Mounting	#8 Screw (M4)

Part #	Circuits	Tin-plated copper negative bus
5015	6	#10-32 stud
5018	6	

For the full list of specifications see page 73

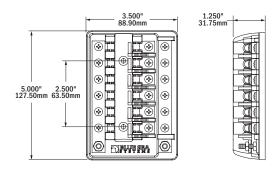

**Related Products** 



62 CIRCUIT PROTECTION bluesea.com

#### ST-Blade Water-Resistant Fuse Block


Provides water-resistant circuit protection for ATO/ATC fuses & circuit breakers in a compact footprint

- · Water-resistant IP66 design
- Accepts standard ring or fork type terminals to allow for simple wiring with standard tools
- · Accepts a wide range of wire sizes
- Integral plugs maintain water-resistant rating if less than four loads are required
- Accepts ATO, ATC and EasyID fast-acting blade fuses (p. 57)
- Accepts ATO/ATC-Style Low Profile Circuit Breakers (p. 77)
- Nests with ST-Blade Water-Resistant Fuse Block (5056 or 5056100) and Water-Resistant 100A Bus Bar (2356 or 2356100)
- · Tin-plated copper busses and fuse clips
- · Includes four write-on circuit labels
- · Small format standard and custom labels available
- · Spare fuse and fastener storage in cover
- Fuses (p. 57) and circuit breakers (p. 77) sold separately

Voltage Max. Operating	32V DC
Amperage Max. Operating	80A per block / 25A per circuit
Fuse Type	ATO or ATC fuses & circuit breakers
Input Wire Size	(1) 8 AWG to 4 AWG
Load Wire Size	(4) 16 AWG to 10 AWG
Bus Material	Tin-Plated Copper C11000
Mounting Thru-hole	Accepts 1/4" (6mm) screws
Screw Terminal	4x #8-32 Screws with captive star lock washer
Stud Terminal	1x #10-32
Regulatory	CE & UKCA certified. For an ABYC/USCG compliant design use (5056100) CE marked, IP66 - protected against powerful water jets (see inside back cover)

Part #	Description	Cover
5056	ST-Blade Water-Resistant Fuse Block	Screw Cover
5056100	ST-Blade Water-Resistant Fuse Block	Manual Cover

For the full list of specifications see page 73 For the mounting diagram see page 100

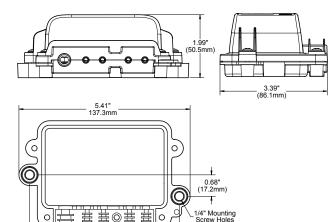

#### Related Products



4.73" -(120.1mm)





ATO, ATC & EasyID Fuses page 57



ATO/ATC Circuit Breakers page 77





# **TECH TIP**

#### **ST-Blade Water-Resistant Fuse Block**

The difference between our new ST-Blade Water-Resistant Fuse Blocks and Busbars are how the fuses and terminations are accessed: Part numbers 5056 / 2356 utilize #8 screws to secure the cover to the rest of the housing, requiring a screwdriver – or tool – for access, and do not meet ABYC requirements for panel boards. Part numbers 5056100 / 2356100 utilize yellow wing-screws that can be manipulated by hand, and comply to the following:

#### ABYC E-11.4.23 states:

Panelboard - an assembly of devices for the purpose of controlling and/or distributing power on a boat. It may include devices such as circuit breakers, fuses, switches, instruments, and indicators.

#### ABYC E-11.4.27 states:

Readily Accessible - capable of being reached quickly and safely for effective use under emergency conditions without the use of tools.

#### ABYC E-11.9.1.2 states

A panelboard shall be installed in a readily accessible location and shall be weatherproof or be protected from weather and water splash.

The ST-Blade Water-Resistant Fuse Blocks and Busbars are rated IP66 and withstand water from heavy seas or projected in powerful jets, allowing for flexible installations anywhere on boats or vehicles.

bluesea.com CIRCUIT PROTECTION 63

# ST-Blade Battery Terminal Mount Fuse Block



Easily add 4 fused circuits to the terminal of a battery to provide power to new accessories


- · Mounts on the battery terminal stud
- Screw terminals for securing wires
- Nylon insulated ring terminals included for each screw terminal
- Insulating cover meets ABYC/USCG insulation requirements
- Ignition protected for use in a gasoline engine compartment
- Includes four 16-14 AWG and four 12-10 AWG Nylon insulated ring terminals
- Includes four write-on circuit labels
- Small format standard and custom labels available
- Fuses sold separately (p. 57)


Voltage Max. Operating	32V DC
Amperage Max. Operating	100A per block / 30A per circuit
Fuse Type	ATO or ATC Fuses
Bus Material	Tin-Plated Copper C11000
Mounting Thru-hole	Clearance for 3/8" [M10] stud
Screw Terminal	#8-32 Screws with captive star lock washer
Regulatory	CE & UKCA certified, meets ISO 8846 and SAE J1171 external ignition protection requirements



Part #	Description
5023	ST-Blade Battery Terminal Mount Fuse Block protection
5024	ST-Blade Battery Terminal Mount Fuse Block Kit

For the full list of specifications see page 73

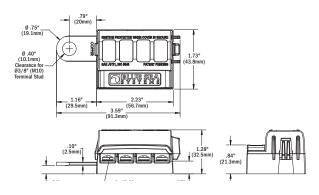



#### Related Products










Nylon insulated ring terminals




#### 5024

• Includes a 4-circuit negative busbar see page 105



5023 Installed

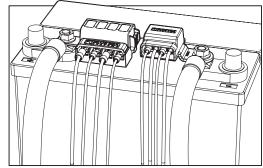

5024 Installed

64 CIRCUIT PROTECTION bluesea.com

#### **ST-Blade Fuse Blocks**

#### **Independent Source**


#### Consolidates branch circuits and eliminates in-line fuses


- Independent source fuse block
- Can be used for 24-hour circuits and switched circuit in same block
- Screw terminals for securing wires accept ring terminals
- Clear insulating cover with label recesses and storage for one fuse, satisfies ABYC/USCG insulation requirements
- Easy to open, push button latch for easy access to fuses
- · Tin-plated copper buses and fuse clips
- Fuse Block with cover includes 20 write-on circuit labels and two Terminal Block Jumpers Part # 9217 (p. 103)
- · Small format standard and custom labels available
- Fuses sold separately (p. 57)

Voltage Max. Operating	32V DC
Amperage Max. Operating	30A per circuit
Amperage Max. Operating	40A per jumped circuit group
Fuse Type	ATO or ATC Fuses
Screw Terminal	#8-32 Screws with captive star lock washer
Mounting	#8 Screw (M4)

Part #	Circuits	Cover	
5035	6	Yes	
5037	6	-	

For the full list of specifications see page 73

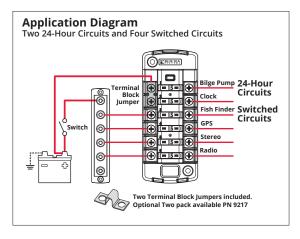



#### Related Products







page 57





5035



5037

# **TECH TIP**

#### **Fuse Sizing Best Practices - 80% Rule**

It is a common misconception that a fuse should be rated for the same amperage as the circuit. Fuses include a metal component designed to heat up when current runs through them. The more current, the hotter the metal gets. When too much current runs through the fuse, the metal heats up enough to separate, breaking the circuit. This means that rating a fuse at the same amperage as the circuit will produce the maximum heat in the fuse without actually breaking the circuit. For this reason the National Electrical Code recommends limiting the amount of current in a circuit to 80% of the fuse rating in that circuit. In other words a 40A fuse would be appropriate for a circuit with a maximum of 32A continuous. This is why you will see many fuse blocks with maximum continuous amperage ratings around 80% of the largest available fuse.

bluesea.com CIRCUIT PROTECTION 65

# **ST-Blade Split Bus Fuse Block**

#### **Common and/or Independent Source**


For use when a mix of switched and 24-hour circuits are desired in the same block

- Common and/or independent source fuse block
- Provides two isolated groups of six ATO/ATC circuits
- For use with either two isolated batteries or with a single battery providing a mix of 24-hour and switched circuits
- Clear insulating cover satisfies ABYC/USCG insulation requirements and provides storage for two spare fuses
- · Accepts ring terminals
- Easy to open, push button latch provides easy access to fuses
- Tin-plated copper buses and fuse clips
- Includes 20 write-on circuit labels
- Fuses sold separately (p. 57)

Voltage Max. Operating	32V DC
Amperage Max. Operating	30A per circuit, 100A total (not to exceed 80A per load group)
Fuse Type	ATO or ATC Fuses
Screw Terminal	#8-32 Screws with captive star lock washer
Mounting	#8 Screw (M4)
Recommended Wire Size	Positive Feed: 4-6 AWG (25-16 mm²) Branch Circuits: 10-16 AWG (6-15 mm²)
Recommended Torque	#10 Stud: 24 in-lb (2.71 N-m) #8 Screw: 18 in-lb (2.03 N-m)

Part #	Circuits	Cover	Negative Bus	Positive Bus
5032	12	Yes	#10-32 stud	#10-32 stud

For the full list of specifications see page 73

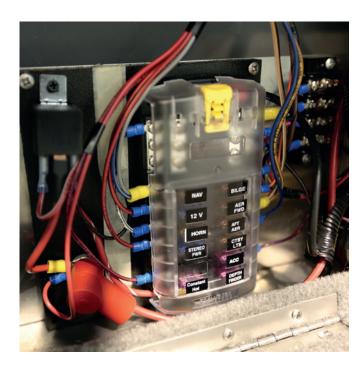













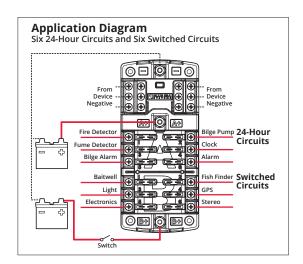



66 CIRCUIT PROTECTION bluesea.com

#### **ST-Blade Common Source Fuse Blocks**

#### **Common Source**


#### Consolidates branch circuits and in-line fuses


- · Common source fuse block
- Screw terminals for securing wires accept ring terminals
- One-piece stainless flange nuts ensure safe and secure connections
- Clear insulating cover with label recesses and storage for two fuses, satisfies ABYC/USCG insulation requirements
- · Easy to open, push button latch for easy access to fuses
- Tin-plated copper buses and fuse clips
- Fuse blocks with covers include 20 write-on circuit labels small format standard and custom labels available
- Fuses sold separately (p. 57)

Voltage Max. Operating	32V DC
Amperage Max. Operating	30A per circuit 100A per block
Fuse Type	ATO or ATC Fuses
Screw Terminal	#8-32 Screws with captive star lock washer
Mounting	#8 Screw (M4)

Part #	Circuits	Cover	Negative Bus	Positive Bus	[A] Width in (mm)	[B] Mounting Centers in (mm)	[C] Height in (mm)	[D] Mounting Centers in (mm)
5025	6	Yes	#10-32 stud	#10-32 stud	3.32 (84.20)	2.50 (63.50)	4.89 (124.31)	3.88 (95.58)
5028	6	Yes		#10-32 stud	3.32 (84.20)	2.50 (63.50)	3.65 (92.76)	2.64 (67.03)
5030	6		#10-32 stud	#10-32 stud	3.32 (84.20)	2.50 (63.50)	4.89 (124.31)	3.88 (95.58)
5033	6			#10-32 stud	3.32 (84.20)	2.50 (63.50)	3.65 (92.76)	2.64 (67.03)
5026	12	Yes	#10-32 stud	#10-32 stud	3.32 (84.20)	2.50 (63.50)	6.47 (164.39)	5.46 (138.66)
5029	12	Yes		#10-32 stud	3.32 (84.20)	2.50 (63.50)	5.23 (132.84)	4.22 (107.11)
5031	12		#10-32 stud	#10-32 stud	3.32 (84.20)	2.50 (63.50)	6.47 (164.39)	5.46 (138.66)
5034	12			#10-32 stud	3.32 (84.20)	2.50 (63.50)	5.23 (132.84)	4.22 (107.11)

For the full list of specifications see page 73



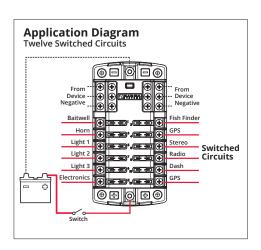



5028 with cover 5033 without cover



5025 with cover 5030 without cover



5029 with cover 5034 without cover



5026 with cover 5031 without cover

#### **Related Products**



page 57





WeatherDeck Switch Only page 115

bluesea.com CIRCUIT PROTECTION 67

# **ST-Blade Compact Fuse Blocks**

#### **Common Source**

Provides surface mount circuit protection for ATO or ATC Fuses in a compact footprint. The single side design allows wire entry from one side to maximize space


- Compact common source fuse blocks
- · Accepts ATO and ATC fast acting blade fuses
- · Single side entry wiring
- Ignition Protected for use in a gasoline engine compartment
- Insulating cover meets ABYC/USCG insulation requirements
- Tin-plated copper buses and fuse clips
- Accepts ring or snap fork type terminals
- Includes write-on circuit labels for each circuit
- Small format standard and custom labels available
- Fuses sold separately (p. 57)

Voltage Max. Operating	32V DC
Amperage Max. Operating	30A per circuit 100A per block
Fuse Type	ATO or ATC Fuses
Screw Terminal	#8-32 Screws with captive star lock washer
Mounting	#8 Screw (M4)
Regulatory	CE & UKCA certified. Meets ISO 8846 & SAE J1171 external ignition protection requirements

# IGNITION PROTECTED

Part #	Circuits	Cover
5045	4	Yes
5046	8	Yes

For the full list of specifications see page 73

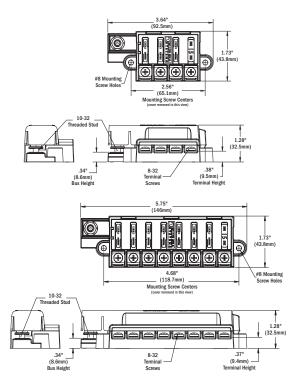

#### **Related Products**








5045



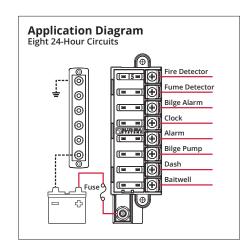

**CIRCUIT PROTECTION** 68 bluesea.com

#### **MRBF Surface Mount Fuse Blocks**

#### **MRBF**—Marine Rated Battery Fuse

- Surface mount fuse blocks accommodate three MRBF fuses for consolidated high amperage circuit protection
- The independent source fuse block (5194) is ideal for 3 output battery chargers
- The common source fuse block (5196) provides 3 loads from a single source
- Clip-on cover insulates terminal connections
- Versatile wiring options allow all wires to come out a single side
- · Label recesses for easy circuit identification
- One-piece stainless flange nuts ensure safe and secure connections
- · Ignition protected when used with MRBF fuses
- Fuses sold separately (p. 58)

Part #	5194	5196
Block Type	Independent Source	Common Source
Fuses	3	3
Voltage Max. Operating	58V DC	58V DC
Amps Max. Operating (using 4/0 cables)	300A per block	300A per block 240A per circuit
Terminal Fuses Available	30A-300A	30A-300A
Terminal Stud Size	5/16" -18 (8mm)	5/16" -18 (8mm)
Mounting Hole Size	#10 (5mm)	#10 (5mm)
Regulatory	Meets ISO 8846 and SAE J1171 external ignition protection requirements when used with MRBF fuses and cover is securely latched	

For the full list of specifications see page 73





#### **Related Products**



## **MRBF Terminal Fuse Blocks MRBF**—Marine Rated Battery Fuse

Satisfies ABYC 7" circuit protection rule by mounting on a 3/8" battery post, battery switch, or bus bar

- · Appropriate for DC Main, inverter, windlass, and bow thruster circuit protection
- · Weatherproof suitable for small open-cockpit boats and other harsh environments
- · Insulating cap prevents accidental shorts
- Ignition protected when used with MRBF fuses
- Fuses sold separately (p. 58)

Part #	5191	2151
Fuses	1	2
Voltage Max. Operating	58V DC	58V DC
Amps Max. Operating (using 4/0 cables)	300A	300A
Terminal Fuses Available	30A-300A	30A-300A
Terminal Stud Size	M8 (5/16"-18)	M8 (5/16"-18)
Mounting Hole Size	3/8"	3/8"
Regulatory	Meets ISO 8846 and SAE J1171 external ignition protection requirements	



For the full list of specifications see page 73





**Related Products** 



MRRF Fuses page 58

#### MEGA® or AMG® Fuse Block

Provides an economical system for 100A to 300A fusing

- · Insulating cover with breakouts satisfies ABYC/USCG insulation requirements
- · Stainless steel studs provide resistance to corrosion and allow high torque
- · UL 94-V0 base resists high heat
- Fuses sold separately (p. 58)



Part #	5001
Voltage Max. Operating	32V DC
Amperage Max. Operating	300A
Wire Size to Meet Rating	4/0 AWG (120mm²)
Terminal Stud Size	5/16"-18 (M8)
Mounting	#10 (M5) Screws
Fuse Type	MEGA or AMG
Fuses available	100A-300A

For the full list of specifications see page 73




MEGA or AMG Fuses page 58

bluesea.com CIRCUIT PROTECTION 69

#### **Class-T Fuse Blocks**

Allows the use of Class T fuses for fast acting circuit protection of inverters and other electronics







- Four stud design provides ample access around connecting stud to install large cable lugs without obstruction from the fuse
- Insulating cover satisfies ABYC/USCG insulation requirements
- · Cover breakouts allow wire access in any direction
- Stud design ensures secure fuse mounting even with high heat
- Stainless steel studs provide resistance to corrosion and high torque
- One-piece stainless flange nuts ensure safe and secure connections
- UL 94-V0 base resists high heat
- Fuse sold separately (p. 59)

Voltage Max. Operating	160V DC
Mounting	1/4" (M6) Screws
Fuse Mounting Blocks	Tin-Plated Copper
Regulatory	<b>5007100 &amp; 5502100</b> Meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure

# IGNITION PROTECTED

5007100 & 5502100 ONLY

Part #	Class T Fuses	Terminal Stud Size	Amps Max. Operating
5502	225A-400A	3/8"-16 (M10)	320A
5007100	110A-200A	1/4"-20 (M6)	160A
5502100	225A-400A	5/16"-18 (M8)	320A

For the full list of specifications see page 73

#### **Related Products**



Class-T Fuses

#### **ANL® Fuse Blocks**

Accepts a wide range of ANL fuse amperages for versatile fusing



- Swing out design allows replacement of the fuse without removing fasteners
- Insulating cover satisfies ABYC/USCG insulation requirements
- · Cover breakouts allow wire access in any direction
- · Insert molded studs ensure secure fuse mounting
- Stainless steel studs provide resistance to corrosion and high torque
- One-piece stainless flange nuts ensure safe and secure connections
- · UL 94-V0 base resists high heat
- Fuse sold separately (p. 59)

Part #	5503	5505		
Fuses	1	1		
Voltage Max. Operating	32V DC	32V DC		
Amps Max. Operating	750A	300A		
ANL Fuses Available	35A-750A	35A-300A		
Terminal Stud Size	5/16"-18 (M8)	5/16"-18 (M8)		
Mounting	1/4" (M6) Screws	#10 (M5) Screws		
Regulatory	Meets ISO 8846 and SAE J1171 external ignition protection requirements			

For the full list of specifications see page 73

#### **Related Products**



page 59

# **TECH TIP**

#### **ABYC guidelines and Ignition Protection**

**Blue Sea Systems fuse blocks marked ignition protected** are designed and tested for ignition protection, enabling them to be installed in a compartment where gasoline or other explosive fumes may be present.

Blue Sea Systems' fuse blocks that meet the U.S. Coast Guard ignition protection requirements include the MAXI®, ST-Blade Battery Terminal Mount, ST-Blade Compact, Terminal MRBF, some Class-T models, Safety, and SafetyHub Fuse Blocks.

#### The U.S. Coast Guard states:

An electrical component that is "ignition protected" is capable of operating in an explosive environment without igniting that environment. "Ignition protection" of electrical devices is accomplished by the use of seals, flame arrestors and potting (sealing), or a combination of such means.

70 CIRCUIT PROTECTION bluesea.com

# Safety Fuse Block AMI® or MIDI®

Ignition protected for use on gasoline powered boats with 30A to 200A circuits



- Sealed cover protects fuses from the harsh marine environment and satisfies ABYC/USCG insulation requirements
- · Cover breakouts allow wire access in three directions
- Cover accommodates a spare fuse
- · One-piece stainless flange nuts ensure safe and secure connections
- · Accepts square format standard or custom label
- Fuses sold separately (p. 58)

Part #	7720
Fuse Type	AMI or MIDI
Fuse Amperages Available	30A-200A
Voltage Max. Operating	32V DC
Wire Size to Meet Rating	2/0 AWG (70 mm²)
Mounting holes	Accept 1/4" (M6) Screws
Terminal Stud Size	M8
Terminal Screw Size	M5 Stainless Steel
Regulatory	CE & UKCA certified,, meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure, IP66 – protected against powerful water jets (see inside back cover)



For the full list of specifications see page 73

#### **Related Products**



# Safety Fuse Block MEGA® or AMG®

Ignition protected for use on gasoline powered boats with 30A to 300A circuits





- Sealed cover protects fuses from the harsh marine environment and satisfies ABYC/USCG insulation requirements
- · Cover breakouts allow wire access in three directions
- · One-piece stainless flange nuts ensure safe and secure connections
- · Accepts square format standard or custom label
- Fuses sold separately (p. 58)

Part #	7721
Fuse Type	MEGA or AMG
Fuse Amperages Available	100A-300A
Voltage Max. Operating	32V DC
Wire Size to Meet Rating	2/0 AWG (70 mm²)
Mounting holes	Accept 1/4" (M6) Screws
Terminal Stud Size	M8
Regulatory	CE & UKCA certified,, meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure, IP66 – protected against powerful water jets (see inside back cover)



For the full list of specifications see page 73  $\,$ 

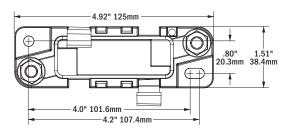





bluesea.com CIRCUIT PROTECTION 71

## SafetyHub 100 Fuse Block

The SafetyHub 100 combines an ignition protected fuse block and integrated connecting plugs. It is safe for use on gasoline powered boats, reduces wiring connections, and consolidates up to seven fused circuits



- Accepts three AMI or MIDI Fuses for high-amp circuits including panel feeds, windlasses, and stereo amplifiers
- Accepts four ATO or ATC Fuses for circuits including bilge pumps, electronics and lights
- Sealed cover protects fuses from the harsh marine environment and satisfies ABYC/USCG insulation requirements
- Integrated connector plug eliminates loose wires and provides a secure, waterproof connection
- Fuses sold separately (p. 57-58)

Part #	7725			
Amperage Max. Operating (combined)	280A			
Voltage Nominal Operating	12V DC			
Minimum Cable Size to Meet Ratings	4/0 AWG (120 mm²)			
Recommended Ring Terminal	M8 (5/16")			
MIDI or AMI Fuse Block				
Amperage Max. Operating (per block)	240A†			
Amperage Max. Operating (per circuit)	170A†			
Fuse Amperages Available	30-200A			
Minimum Cable Size to Meet Ratings	2/0 AWG (70 mm)			
ATO or ATC Fuse Block				
Amperage Max. Operating (per block)	50A†			
Amperage Max. Operating (per circuit)	20A†			
Fuse Amperages Available	1A-20A			
Regulatory	CE & UKCA certified,, meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure, IP66 – protected against powerful water jets (see inside back cover)			

<sup>&</sup>lt;sup>†</sup> Ratings are dependent on input cable sized for appropriate amperages



For the full list of specifications see page 73

#### Related Products





page 57



# SafetyHub 150 Fuse Block

The SafetyHub 150 is an ignition protected fuse block with screw termination. It is safe for use on gasoline powered boats, reduces wiring connections, and consolidates up to



- Accepts four AMI or MIDI Fuses for high-amp circuits including panel feeds, windlasses, and stereo amplifiers
- Accepts six ATO or ATC Fuses for circuits including bilge pumps, electronics and lights
- Sealed cover protects fuses from the harsh marine environment and satisfies ABYC/USCG insulation requirements
- Negative bus provides common location for negative connection
- · Circuit identification label with write-on capability
- · Fuse puller to remove ATO or ATC Fuses
- Cover provides storage space for spare fuses and mounting screws
- One-piece stainless flange nuts ensure safe and secure connections
- Fuses sold separately (p. 57-58)

Part #	7748
Amperage Max. Operating (combined)	280A
Voltage Max. Operating	32V DC
Minimum Cable Size to Meet Ratings	4/0 AWG (120 mm²)
Recommended Ring Terminal	M8 (5/16")
Stud Size	M8
MIDI or AMI Fuse Block	
Amperage Max. Operating (per block)	280A†
Amperage Max. Operating (per circuit)	170A†
Fuse Amperages Available	30-200A
Minimum Cable Size to Meet Ratings	2/0 AWG (70 mm)
Screw Size	M5
ATO or ATC Fuse Block	
Amperage Max. Operating (per block)	50A†
Amperage Max. Operating (per circuit)	25A†
Fuse Amperages Available	1A-20A
Screw Size	#8-32
Regulatory	CE & UKCA certified,, meets ISO 8846 and SAE J1171 external ignition protection requirements when cover is secure, IP66 – protected against powerful water jets (see inside back cover)

<sup>†</sup> Ratings are dependent on input cable sized for appropriate amperages



For the full list of specifications see page 73

72 CIRCUIT PROTECTION bluesea.com

# **Fuse Specification Table**

	4	44	4 11	4	150	A THE		
Page #	56	56	56	56	57	57	57	57
Product	GMA	AGA	AGC	MDL	ATM	ATO or ATC	easylD	MAXI
Interrupting Capacity DC					1,000A DC	1,000A DC	1,000A DC	1,000A DC
Maximum Voltage DC	24V DC	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC
Maximum Voltage AC	5–10A: 125V AC 1–3A: 250V AC	-	.25–10A: 250V AC	3-7.5A: 250V AC				
Amperage Range	1-10A	20A	.5-30A	3-30A	2-30A	1-30A	3-40A	30-80A
Quantity Per Package	3	5	5 or 25	2	2	2 or 25	2	1

<sup>\*</sup> Certain amperages of GMA®, AGC®, and MDL® fuses are AC/DC rated. See product page for specific ratings



# **In-Line Fuse Holder Specification Table**



# **Fuse Block Specification Table**

















Part #	5006100	5015 & 5018	5056 & 5056100	5023	5035 & 5037	5032	5028, 5025, 5029 & 5026	5045 & 5046
Page #	61	61	62	63	64	65	66	67
Product	MAXI	ST-Glass			ST-B	lade		
For use with	MAXI	AGC or MDL	ATO or ATC	ATO or ATC	ATO or ATC	ATO or ATC	ATO or ATC	ATO or ATC
Maximum Voltage	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC	32V DC
Maximum Amperage per circuit	80A	30A	25A	30A	30A	30A	30A	30A
Maximum Amperage per block	80A	100A	80A	100A	40A per jumped circuit group	100A (not to exceed 80A per load group)	100A	100A
Available Fuses	30-80A	.25-30A	1-30A	1-30A	1-30A	1-30A	30-300A	1-30A
Ingress Protected			IP66-protected against powerful water jets.					IP66-protected against powerful water jets.
Ignition Protected	ISO 8846, SAE J1171 when cover is secure.			ISO 8846, SAE J1171 when cover is secure.				ISO 8846, SAE J1171 when cover is secure.













2151 & 5191	5194	5196	5001	5502	5007100	5502100
68	68	68	69	69	69	69
MRBF Terminal	MRBF Surface	MRBF Surface	MEGA or AMG	Class-T	Class-T	Class-T
Terminal (MRBF)	Terminal (MRBF)	Terminal (MRBF)	MEGA or AMG	Class-T	Class-T	Class T
58V DC	58\	/ DC	32V DC	160V DC	160V DC	160V DC
300A	240A	240A	300A	320A	160A	320A
300A		300A	300A	320A	160A	320A
30-300A	30-300A	30-300A	100-300A	225-400A	110-200A	225-400A
IP66 when used with Blue Sea Systems' Terminal (MRBF) Fuses.						
					ISO 8846, SAE J1171 when cover is secure.	ISO 8846, SAE J1171 when cover is secure.
	68 MRBF Terminal Terminal (MRBF) 58V DC 300A 300A 30-300A IP66 when used with Blue Sea Systems' Terminal (MRBF) Fuses.	68 68  MRBF Terminal MRBF Surface  Terminal (MRBF) Terminal (MRBF)  58V DC 58V  300A 240A  300A  30-300A 30-300A  IP66 when used with Blue Sea Systems' Terminal (MRBF) Fuses.  SAE J1171 when used	68         68         68           MRBF Terminal         MRBF Surface         MRBF Surface           Terminal (MRBF)         Terminal (MRBF)         Terminal (MRBF)           58V DC         58V DC         300A           300A         240A         240A           300A          300A           30-300A         30-300A         30-300A           IP66 when used with Blue Sea Systems' Terminal	68         68         68         69           MRBF Terminal         MRBF Surface         MRBF Surface         MEGA or AMG           Terminal (MRBF)         Terminal (MRBF)         MEGA or AMG           58V DC         58V DC         32V DC           300A         240A         240A         300A           30-300A          300A         300A           30-300A         30-300A         30-300A         100-300A           IP66 when used with Blue Sea Systems' Terminal (MRBF) Fuses.	68         68         68         69         69           MRBF Terminal         MRBF Surface         MRBF Surface         MEGA or AMG         Class-T           Terminal (MRBF)         Terminal (MRBF)         MEGA or AMG         Class-T           58V DC         58V DC         32V DC         160V DC           300A         240A         240A         300A         320A           300A          300A         300A         320A           30-300A         30-300A         30-300A         100-300A         225-400A           IP66 when used with Blue Sea Systems' Terminal (MRBF) Fuses.               SAE J1171 when used         SAE J1171 when used	68         68         68         69         69         69           MRBF Terminal         MRBF Surface         MEGA or AMG         Class-T         Class-T           Terminal (MRBF)         Terminal (MRBF)         MEGA or AMG         Class-T         Class-T           58V DC         58V DC         32V DC         160V DC         160V DC           300A         240A         240A         300A         320A         160A           300A          300A         300A         320A         160A           30-300A         30-300A         30-300A         100-300A         225-400A         110-200A           IP66 when used with Blue Sea Systems' Terminal (MRBF) Fuses.            ISO 8846, SAE J1171 when used











Part #	5005	5503	7720 & 7721	7725	7748
Page #	69	70	70	7	71
Product	ANL	ANL	Safety	SafetyHub 100	SafetyHub 150
For use with	ANL	ANL	7720: AMI or MIDI 7721: MEGA or AMG	AMI or MIDI a	nd ATO or ATC
Maximum Voltage	32V DC	32V DC	32V DC	12V DC	32V DC
Maximum Amperage per circuit	300A	750A	7720: 200A 7721: 300A	AMI or MIDI: 250A ATO or ATC: 30A	AMI or MIDI: 170A ATO or ATC: 25A
Maximum Amperage per block	300A	750A	7720: 200A 7721: 300A	ATO or ATC: 50A	AMI or MIDI: 280A ATO or ATC: 50A
Maximum Total Amperage (combined)	35-300A			280A	280A
Available Fuses		35-750A	7720: 30-200A 7721: 100-300A	AMI or MIDI: 30-200A ATO or ATC: 1-30A	AMI or MIDI: 30-200A ATO or ATC: 1-30A
Ingress Protected			IP66-	protected against powerful wat	er jets.
Ignition Protected			ISO	8846, SAE J1171 when cover is s	ecure.


# **ST-CLB Circuit Breaker Blocks**


Compact surface mount solution providing secure screw termination where Push Button Reset-Only CLB Circuit Breakers are desired

- Clear insulating cover with square format label recesses, satisfies ABYC/USCG insulation requirements
- · Quick connect clips allow circuit breakers to snap easily into place
- Tin-plated copper busses and screw terminals
- · Breakouts allow wire access in two directions
- · Accepts ring terminals
- · Optional push button waterproof boots or dress nuts can be installed over cover
- · Accepts square labels
- Optional jumper 5049, for use with 5050 and 5051
- · Circuit breakers sold separately (p. 75)

Voltage Max. Operating	32V DC
Amperage Max. Operating	32A (per circuit)
Amperage Max. Operating	100A (per block - common source)
Amperage Max. Operating	40A (per jumped circuit group - independent source)
Temp. Operating Range	-10°C to 60°C
Breaker Type	Push Button Reset-Only Circuit Breaker with Quick Connect Terminals
Screw Terminal	#8-32 Screws with Captive Star Lock Washer
Ring Terminals	Screw Terminals #8 (M4), Negative Bus #10 (M5)
Mounting	#8 Screw (M4) or #8 Nut

Part #	Positions	Negative Bus	Source	[A] Mounting Centers in (mm)	[B] Mounting Centers in (mm)	[C] Height in (mm)
5050	6		Independent	5.63 (142.9)	1.40 (35.6)	6.69 (169.9)
5051	12		Independent	10.13 (257.2)	1.71 (43.4)	11.19 (284.2)
5052	6	#10-32 stud	Common	5.63 (142.9)	1.40 (35.6)	6.69 (169.9)
5054	12	#10-32 stud	Common	10.13 (257.2)	1.71 (43.4)	11.19 (284.2)
5049	ST CLB Block Jumper, 5 per pack					

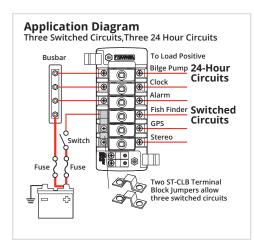







#### **Related Products**









CLB Circuit Breaker Boots page 75



Push Button Reset-Only CLB Circuit Breakers page 75



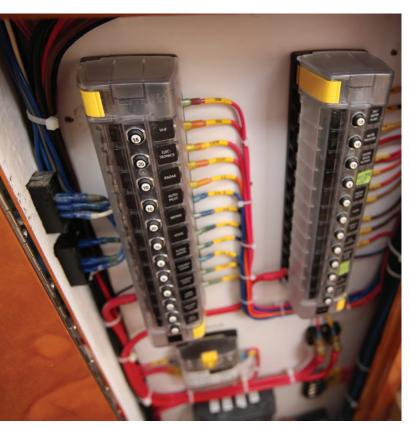

True North Yachts installs ST-CLB blocks aboard their boats, including the True North 38.

# **CLB Circuit Breaker Waterproof Boots**

Protects push button circuit breakers in wet environments

- Used on waterproof panels (p. 114-115)
- Replaces dress nut mounting on circuit breakers

Thread Material	Nickel-Plated Brass
Thread	3/8"-27
Regulatory	IP67 – protected against immersion up to 1 meter for 30 minutes







Part #	Description	Retail Pack
4135	Clear	2
4136	White	2
4137	Black	2

#### **Related Products**



Contura Circuit Breaker Panels page 114



WeatherDeck Circuit Breaker Panels page 115



DC Branch Circuit Breaker Panels page 118



360 Panel Adapter page 96

# Push Button Reset-Only CLB Circuit Breakers

Provides economical circuit protection for 3A to 40A loads when switching is provided elsewhere or not required



- · Quick connect or screw terminal style
- Compact design enables high density circuit protection configurations
- Push-to-reset operation
- Trip Free design cannot be held ON during fault current condition
- · Optional push button waterproof boot

Interrupting Capacity	3,000A @ 14.7V DC / 2,500A @ 28V DC
Voltage Max. Operating	32V DC
Temperature Min. Operating	-10°C
Temperature Max. Operating	60°C
Туре	Thermal trip, manual reset
Terminals	#8 Screw Terminals (ST) or 1/4" Male Quick Connect (QC) Terminals
Screw Terminal Torque	6 in-lb max.
Trip Time Delay	See bluesea.com
Thread	3/8"-27 UNS
Regulatory	CE marked, UL Recognized – UL 1077 – UL/cUL (USA and Canada), TUV certified, EN 60934, meets UL 1500 and ISO 8846 external ignition protection require- ments


#### IGNITION PROTECTED

Screw Terminals Part #	QC Terminals Part #	Amps
2129	7050	3A DC
2130	7052	5A DC
2131	7053	7A DC
2132	7054	10A DC
2133	7056	15A DC
2134	7057	20A DC
2135	7058	25A DC
2136	7059	30A DC
2137	7061	40A DC





Cutout Dimensions

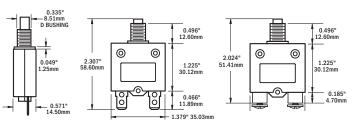

1/4" Male Quick Connect Terminals

#8 Screw Terminals

# Medium Duty Push Button Reset-Only Circuit Breakers

Provides circuit protection for 15A to 60A loads when switching is provided elsewhere or not required


- · Weatherproof
- · Can be used as Main or Branch
- · Push-to-reset operation
- Trip Free design cannot be held ON during fault current condition
- Captive star lock washers meet requirements for anti-rotation and eliminate handling of small, easily dropped parts




Interrupting Capacity	5,000A @ 32V DC 3,000A @ 120V AC
Voltage Max. Operating	32V DC / 120V AC
Temperature Min. Operating	-54°C
Temperature Max. Operating	74°C
Туре	Thermal trip, manual reset
Terminal Stud	#10-32 Stainless Steel
Terminal Stud Torque	30 in-lb max.
Trip Time Delay	See bluesea.com
Mounting Thread	#8 -32
Regulatory	SAE J553, UL 1077, meets UL 1500 external ignition protection requirements

# IGNITION PROTECTED

Part#	Amps
2138	15A DC
2139	20A DC
2140	30A DC
2141	40A DC
2142	50A DC
2143	60A DC



See p. 164 for ABYC Interrupting Capacity Requirements.

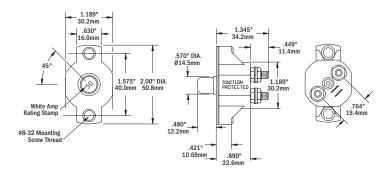

# Carling C1005B Circuit Breaker

Combination switch and thermal circuit breaker with illuminated On indication

- Illuminated 15A circuit breaker provides switching and overcurrent protection
- Used with Blue Sea Systems'
   Water-Resistant Accessory and Circuit Breaker Switch Panels
- Compact design fits industry-standard aperture
- · Quick connect tabs make wiring simple
- Trip free cannot be held closed after trip

Part #	7069
Interrupting Capacity	1,000A AC 1,000A DC
Voltage Max. Operating	250V AC / 32V DC
Temperature Min. Operating	-10°C
Temperature Max. Operating	65°C
Туре	Thermal trip, manual reset
Terminals	1/4" Male Quick Connect
Trip Time Delay	See bluesea.com
Regulatory	UL 1107, UL 1363, IEC 60934

See p. 164 for ABYC Interrupting Capacity Requirements.

## **Water-Resistant Circuit Breaker Boot**


Protects Carling C1005B Circuit Breaker 7069 in wet environments

- Used on Water-Resistant Accessory Ppanels and Water-Resistant Circuit Breaker Switch Panels
- Fits 7069 circuit breaker switches

Part #	4134	
Quantity	6	
Material	Clear Silicone	







Top View

#### Related Products



Water-Resistant Circuit Breaker Switch Panels page 113




Water-Resistant Accessory Panels page 26

# Marine Grade Short Stop Circuit Breakers

#### Use a circuit breaker instead of a fuse


- Designed with corrosion resistant materials to withstand harsh environments
- IP64 water-resistant boot protects against dust and splashing water
- Push-to-reset operation only disconnects when tripped
- Stainless steel nyloc nuts for secure connections
- Red insulating boot included in retail package only

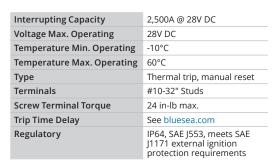

#### IGNITION PROTECTED

Part#	Amps
7151	10A DC
7152	15A DC
7153	20A DC
7154	25A DC
7155	30A DC
7156	40A DC
7157	50A DC
7160	Insulating Boot

See p. 164 for ABYC Interrupting Capacity Requirements.



# ATO°/ATC°-Style Low Profile Circuit Breakers

Use a manually resettable circuit breaker instead of an ATO or ATC fuse

- Drop in replacement for ATO and ATC blade style fuses
- Manual push button reset complies with ABYC circuit protection requirements
- Compatible with Water-Resistant ST-Blade Fuse Block (5056) with cover secured (p. 62)
- Compatible with all other ST-Blade Fuse blocks without cover


Interrupting Capacity	2,000A @ 28V DC
Voltage Max. Operating	32V DC
Temperature Min. Operating	-40°C (-40°F)
Temperature Max. Operating	85°C (185°F)
Туре	Thermal trip, manual reset
Trip Time Delay	See bluesea.com
Regulatory	SAE J553, UL 1500, ISO 10924-4, meets SAE J1171 external ignition protection requirements

#### IGNITION



Part #	Amps	Color	Retail Pack
7062	5A	LT. Brown	2
7063	7.5A	Moss Green	2
7064	10A	Red	2
7065	15A	Blue	2
7066	20A	Yellow	2
7067	25A	White	2
7068	30A	Green	2

See p. 164 for ABYC Interrupting Capacity Requirements.

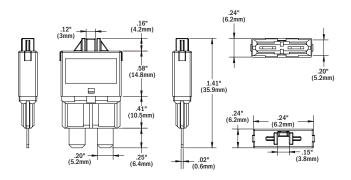

Related Product



ST-Blade Water-Resistant Fuse Block page 62

# **285-Series Circuit Breakers**

Provides circuit protection for 25A to 150A loads when switching and circuit protection are both required

- Visible yellow reset lever shows open condition
- Trip-free design cannot be held closed after trip
- Drop in replacement for 185-Series Circuit Breakers
- 3,000A AIC for medium battery banks

Interrupting Capacity	3,000A @ 48V DC†
Voltage Max. Operating	48V DC
Temperature Operating	-40°C to 85°C (-40°F-185°F)
Type	Thermal
Class	Thermal Reset – Trip Free
Terminal Stud	M6 (accepts 1/4" Ring Terminal)
Terminal Stud Torque	50 in-lb (7.9 Nm)
Mounting Hole	Accepts 1/4" screw (M6)
Regulatory	CE marked, meets SAE J1171 external ignition protection requirements, IP67 – protected against immersion up to 1 meter for 30 minutes (see inside back cover)



†AIC ratings achieved using SAE J1625

Panel Mount Part #	Surface Mount Part #	Amps
7080	7180	25A DC
7081	7181	30A DC
7082	7182	40A DC
7083	7183	50A DC
7084	7184	60A DC
7085	7185	70A DC
7086	7186	80A DC
7087	7187	100A DC
7088	7188	120A DC
7089	7189	150A DC

See p. 164 for ABYC Interrupting Capacity Requirements.

#### **Related Product**



2719 Enclosure

# **Circuit Breaker Mounting Options**

Provides mounting for Cooper Bussmann® Klixon, 285-Series or 185-Series Panel Mount

**Circuit Breakers** 







Height in (mm)

3.31 (84.07)

198	7098	1477
Part #	Description	Width in (mm)
7198	Self-trimming molded rubber bezel	2.44 (61.90)

	· ·	, ,	, ,
7098	Circuit breaker adapter bezel allows circuit breaker mounting in a 2-1/8" round hole	2.44 (61.90)	3.31 (84.07)
1477	Provides circuit breaker mounting in the 360 Panel System	4.88 (123.83)	4.75 (120.65)




Main circuit protection for battery banks up to














7187

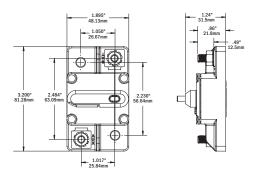

# **187-Series Circuit Breakers**

Provides circuit protection for 25A to 200A loads when switching and circuit protection are both required

- Self-trimming case eliminates need for mounting panels or trim bezels
- · Visible yellow reset lever shows open condition
- Trip-free design cannot be held closed after trip
- Large clearance around terminal studs accepts up to 1/0 AWG lugs
- Recessed mounting holes for clean appearance
- Robust 5/16"-18 terminals provide high torque connections
- 5,000A AIC for large battery banks

Interrupting Capacity	5,000A @ 14V DC 3,000A @ 28V DC 1,500A @ 48V DC
Voltage Max. Operating	48V DC
Temperature Operating	-40°C to 85°C (-40°F-185°F)
Туре	Thermal
Class	Type III – Switchable/Manual Reset – Trip Free
Terminal Stud	5⁄16"-18
Terminal Stud Torque	75 in-lb max.
Trip Time Delay	See bluesea.com
Mounting Hole	Accepts #10 (M5) Screw
Regulatory	CE marked, meets SAE J1171 exter- nal ignition protection require- ments, IP66 – protected against powerful water jets (see inside back cover)

# IGNITION PROTECTED

Panel Mount Part #	Surface Mount Part #	Amps
7035	7135	25A DC
7036	7136	30A DC
7038	7138	40A DC
7039	7139	50A DC
7040	7140	60A DC
7041	7141	70A DC
7042	7142	80A DC
7043	7143	90A DC
7044	7144	100A DC
7046	7146	120A DC
7047	7147	135A DC
7048	7148	150A DC
7049	7149	200A DC

See p. 164 for ABYC Interrupting Capacity Requirements.




Main circuit protection for battery banks up to










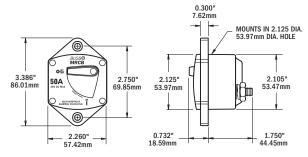







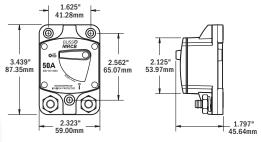


# **COTS Circuit Breakers** Water-Resistant


Suitable for use when government specifications are required

Interrupting Capacity DC	5,000A @ 32V DC, UL 1077-U2, OL1 7,500A @ 65V DC, UL 1077-U1, OL1
Interrupting Capacity AC	2,000A @ 125V AC UL 1077-U2, OL1 5,000A @ 250V AC, UL 1077-U1, OL1
Voltage Max. Operating	65V DC / 277V AC
Temperature Operating	-40°C to 85°C (-40°F-185°F)
Switching Cycles	6000 Electrical, 4000 Mechanical
Туре	Magnetic Hydraulic – Trip free A-Series, metal Toggle
Terminal Screw	#10-32 SS
Terminal Screw Torque	14-15 in-lb
Mounting Screw	#6-32 SS
Mounting Screw Torque	7-9 in/lb
Mounting Boss	1/2-32 Hex Nut SS
Mounting Nut Torque	30 in-lb max.
Regulatory	UL 1077, CSA accepted, Water Resistant - designed and tested in accordance with the MIL-PRF-55629 and MIL—STD-202 specifications

Part #	Amps	Poles	Actuator Style
7310	5A	2	Toggle
7311	10A	2	Toggle
7312	15A	2	Toggle
7313	20A	2	Toggle
7314	25A	2	Toggle
7315	30A	2	Toggle
7316	40A	2	Toggle
7317	50A	2	Toggle



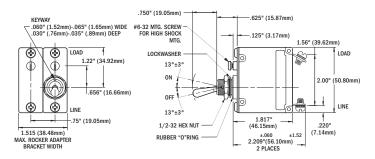





Metal Shark boats builds custom aluminum boats for government agencies. The Custom 360 Panel with Mil-Spec Toggle Circuit Breakers is housed inside the center console and distributes power to critical loads aboard the Relentless 28.



# **UL-489 Circuit Breakers**


#### Expanded line of circuit breakers that meet CFR 46 / CoastGuard requirements

Part #	7440-7446	7454-7459	7461-7467	
Interrupting Capacity	10,000A	5,000A	5,000A	
Voltage Max. Operating	80V DC	240V AC	240V AC	
Temperature Operating	-40°C to 85°C (-40°F–185°F)	-40°C to 85°C (-40°F–185°F)	-40°C to 85°C (-40°F–185°F)	
Туре	C-Series, Magnetic Hydraulic – Trip free	C-Series, Magnetic Hydraulic – Trip free	C-Series, Magnetic Hydraulic – Trip free	
Terminal	#10-32 Screw* Tin-Plated Brass	#10-32 Screw Tin-Plated Brass	1/4"-20 Stud Tin-Plated Brass	
Terminal Torque	15-20 in-lb*	15-20 in-lb	35 in-lb	
Mounting Screw	#6-32 SS	#6-32 SS	#6-32 SS	
Mounting Screw Torque	7-9 in-lb	7-9 in-lb	7-9 in-lb	
Regulatory	UL 489, CSA certified, TUV certified			

<sup>\* 7446 -</sup> Terminal - 1/4"-20 Stud, Terminal Torque - 30-35 in-lb

Part #	Amps	Poles	Actuator Style
7440	5A DC	1	Flat Rocker
7441	10A DC	1	Flat Rocker
7442	15A DC	1	Flat Rocker
7443	20A DC	1	Flat Rocker
7444	30A DC	1	Flat Rocker
7445	50A DC	1	Flat Rocker
7446	100A DC	1	Flat Rocker

Part #	Amps	Poles	Actuator Style
7461	10A AC	2	Flat Rocker
7462	15A AC	2	Flat Rocker
7463	20A AC	2	Flat Rocker
7464	25A AC	2	Flat Rocker
7465	30A AC	2	Flat Rocker
7466	30A AC	2	Raised Rocker
7467	50A AC	2	Raised Rocker



















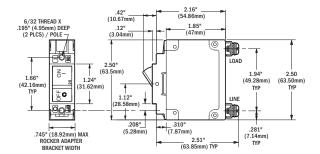



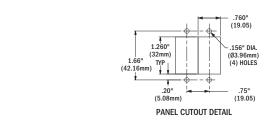

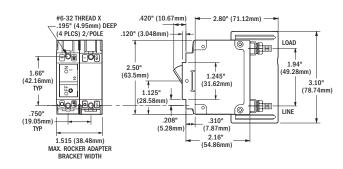

# **A-Series Toggle Circuit Breakers**

Combines switching and circuit protection into a single device










7202


- The standard circuit breaker for Blue Sea Systems Traditional Metal Power Distribution Panels
- Single pole is frequently for AC or DC Branch circuit protection
- Double pole is typically for AC Main circuit protection
- Trip Free cannot be held closed after trip

Voltage Nominal Operating	120/240V AC
Temperature Operating	-40°C to 85°C (-40°F to 185°F)
Switching Cycles	10,000 @ rated amps and volts
Туре	Magnetic Hydraulic – Trip free
Terminal Screw	#10-32 Stainless Steel
Terminal Screw Torque	14–15 in-lb Recommended
Trip Time Delay	See bluesea.com
Mounting Screw	#6-32 Stainless Steel (included)
Mounting Nut Torque	6–8 in-lb Recommended
Regulatory	CE marked, TUV certified, CSA certified, UL 1077 recognized









**Cutout Dimensions** 

#### **Related Products**







Traditional Metal Panel page 117

Part#	Color	Amps	Poles	Max.
7197	White	2.5A	1	65V DC
7200	Black	5A	1	65V DC
7201	Red	5A	1	65V DC
7202	White	5A	1	65V DC
7347	Black	8A	1	65V DC
7299	White	8A	1	65V DC
7204	Black	10A	1	65V DC
7205	Red	10A	1	65V DC
7206	White	10A	1	65V DC
7208	Black	15A	1	65V DC
7209	Red	15A	1	65V DC
7210	White	15A	1	65V DC
7212	Black	20A	1	65V DC
7213	Red	20A	1	65V DC
7214	White	20A	1	65V DC
7216	Black	25A	1	65V DC
7217	Red	25A	1	65V DC
7218	White	25A	1	65V DC
7220	Black	30A	1	65V DC
7221	Red	30A	1	65V DC
7222	White	30A	1	65V DC
7224	Black	40A	1	65V DC
7225	Red	40A	1	65V DC
7226	White	40A	1	65V DC
7228	Black	50A	1	65V DC
7229	Red	50A	1	65V DC
7230	White	50A	1	65V DC

Part #	Color	Amps	Poles	Max.
7232	Black	10A	2	65V DC
7233	White	10A	2	65V DC
7234	Black	15A	2	65V DC
7235	White	15A	2	65V DC
7348	Black	16A	2	65V DC
7294	White	16A	2	65V DC
7236	Black	20A	2	65V DC
7260	White	20A	2	65V DC
7237	Black	30A	2	65V DC
7238	White	30A	2	65V DC
7349	Black	32A	2	65V DC
7295	White	32A	2	65V DC
7239	Black	40A	2	65V DC
7240	White	40A	2	65V DC
7241	Black	50A	2	65V DC
7242	White	50A	2	65V DC

Interrupting Capacity Table (see ABYC Requirements p. 164)

		UL 1077 -	EN60934 - TUV (Europe)		
	Volts	Volts Amps DC Interrupt AC Interrupt		AC Interrupt	
	32V DC		5,000A, U2, OL1		
	65V DC		7,500A, U1, OL1		
1 Pole	125V AC			2,000A, U2, OL1	
	250V AC	2-30A		1,500A, U2, OL0	1,500A
	250V AC	40-50A		3,000A, U1, OL0	1,500A
	32V DC		5,000A, U2, OL1		
	65V DC		7,500A, U1, OL1		
2 Pole	125V AC	1		3,000A, U2, OL1	
	250V AC	2-30A		3,000A, U2, OL1	1.500A
	230V AC	40-50A		3,000A, U2, OL0	1,500A

# **Circuit Breaker Mounting Options**

- 3131, Strain reliefs included, accepts A-Series Toggle and A and C-Series Flat Rocker Circuit Breakers, Square Format Labels (p. 154), and LEDs (p. 153)
- 8072 and 8173, Accepts A-Series Toggle Circuit Breakers, Large Format Labels (p. 154), and LEDs (p. 153)







8072

Part #	Description	Width in (mm)	Height in (mm)	Depth in (mm)
3131	Enclosure	3.95 (100.36)	4.92 (124.91)	4.07 (103.40)
8072	1 Pole mounting panel	2.63 (66.80)	3.75 (92.25)	0.125 (3.175)
8173	2 Pole mounting panel	2.63 (66.80)	3.75 (92.25)	0.125 (3.175)

# **A-Series Rocker Circuit Breakers**

Combines switching and circuit protection into a single device



#### 7403 Flat Rocker

- Standard circuit breaker used on the 360 Panel System (1200 Series)
- Flat actuator resists accidental switching by being flush in the ON position





# Restricted-OFF Rocker

- Actuator shows white in the OFF position
- Restricted OFF actuator can only be switched to OFF by insertion of small screwdriver into slot





#### 7574 Raised Rocker

 Standard circuit breaker for AC Source Select panels in the 360 Panel System



- White actuator indicates OFF position
- Single pole is available in Flat Rocker and Restricted Off styles
- Single pole is frequently used for AC or DC Branch circuit protection
- Double pole is available in Flat Rocker and Raised Rocker styles
- Double pole is typically used for AC Main circuit protection
- Raised Rocker actuator style is used for AC source selection on the 360 Panel System
- International ON and OFF symbols support vertical or horizontal mounting

Voltage Nominal Operating	120/240V AC
Temperature Operating	-40°C to 85°C (-40°F to 185°F)
Switching Cycles	10,000 @ rated amps and volts
Туре	Magnetic Hydraulic – Trip free
Terminal Screw	#10-32 Stainless Steel
Terminal Screw Torque	14–15 in-lb Recommended
Trip Time Delay	See bluesea.com
Mounting Screw	#6-32 Stainless Steel (included)
Mounting Nut Torque	6–8 in-lb Recommended
Regulatory	CE marked, TUV certified, CSA certified, UL 1077 recognized

#### Interrupting Capacity Table (see ABYC Requirements p. 164)

		UL 107	EN60934 - TUV (Europe)		
	Volts	Amps	DC Interrupt	AC Interrupt	AC Interrupt
	32V DC		5,000A, U2, OL1		
	65V DC		7,500A, U1, OL1		
1 Pole	125V AC	2-30A		3,000A, U2, OL1	
1 Fole	125V AC	40-50A		1,500A, U2, OL1	
	250V AC	2-30A		1,500A, U2, OL0	1,500A
	250V AC	40-50A		3,000A, U1, OL0	1,500A
	32V DC		5,000A, U2, OL1		
	65V DC		7,500A, U1, OL1		
2 Pole	125V AC			3,000A, U2	
	250V AC	2-30A		3,000A, U2, OL1	1,500A
	250V AC	40-50A		3,000A, U2, OL0	1,500A


Part #	Amps	Max.	Poles	Rocker Actuator
7399	2.5A	32V DC	1	Flat
7400	5A	32V DC	1	Flat
7425	5A	32V DC	1	Restricted-OFF
7401	8A	32V DC	1	Flat
7402	10A	32V DC	1	Flat
7427	10A	32V DC	1	Restricted-OFF
7403	15A	32V DC	1	Flat
7428	15A	32V DC	1	Restricted-OFF
7404	20A	32V DC	1	Flat
7429	20A	32V DC	1	Restricted-OFF
7405	25A	32V DC	1	Flat
7430	25A	32V DC	1	Restricted-OFF
7406	30A	32V DC	1	Flat
7407	40A	32V DC	1	Flat
7408	50A	32V DC	1	Flat
7433	50A	32V DC	1	Restricted-OFF


Part #	Amps	Max.	Poles	Rocker Actuator
7410	10A	32V DC	2	Flat
7411	15A	32V DC	2	Flat
7412	16A	32V DC	2	Flat
7413	20A	32V DC	2	Flat
7574	30A	32V DC	2	Raised
7414	30A	32V DC	2	Flat
7575	32A	32V DC	2	Raised
7415	32A	32V DC	2	Flat
7416	40A	32V DC	2	Flat
7577	50A	32V DC	2	Raised
7417	50A	32V DC	2	Flat


#### **Related Products**



360 Panel System page 116







**Cutout Dimensions** 

# **C-Series Toggle Circuit Breakers**

Combines switching and circuit protection into a single device











#### DC Features

- Large frame provides stud termination for 5-300A loads
- Provides overcurrent protection for inverters, bow thrusters, and windlasses
- Offers high interrupt capacity suitable for Main circuit protection
- Trip Free cannot be held closed after trip

#### AC Features

- Frequently used for 120/240V AC circuit protection
- Double pole can be used as AC Main circuit breaker to switch hot and neutral or two hots in 120/240V AC Branch applications
- Triple pole can be used as 120/240V AC Main circuit breaker to switch both lines (hots) and neutral
- Double and triple pole circuit breakers will trip all poles if any one pole trips

Voltage Nominal Operating	120/240V AC
Temperature Operating	-40°C to 85°C (-40°F to 185°F)
Switching Cycles	10,000 @ rated amps and volts
Туре	Magnetic Hydraulic – Trip free
Terminal Stud	1/4"-20 Tin-Plated Brass
Terminal Stud Torque	35 in-lb max.
Trip Time Delay	See bluesea.com
Mounting Screw	#6-32 Stainless Steel (included)
Mounting Screw Torque	6–8 in-lb Recommended
Regulatory	UL 1077 Recongnized & CSA Accepted 7250I only – meets SAE J1171, UL 1500 external ignition protection requirements

#### IGNITION PROTECTED

Interrupting Capacity Table (see ABYC Requirements p. 164)

		EN60934 - TUV (Europe)			
	Volts	Volts Amps DC Interrupt AC Interrupt			AC Interrupt
	48V DC		5,000A, U2, OL1		
1 Pole	85V DC		7,500A, U1, OL1		
1 Fole	125V DC			3,500A, U2, OL1	
	250V AC			3,000A, U2, OL1	
	48V DC		5,000A, U2, OL1		
2 Pole	125V AC			3,500A, U2, OL1	
	250V AC			5,000A, U1, OL1	1,500A

#### **Related Product**





Traditional Metal 7372 page 125


Part #	Color	Amps	Poles	Max.
7350	White	5A DC	1	80V DC
7351	White	10A DC	1	80V DC
7352	White	15A DC	1	80V DC
7353	White	20A DC	1	80V DC
7354	White	25A DC	1	80V DC
7355	White	30A DC	1	80V DC
7244	White	50A DC	1	80V DC
7246	White	60A DC	1	80V DC
7248†	White	80A DC	1	65V DC
7250 <sup>†</sup>	White	100A DC	1	65V DC
7250I†	Red	100A DC	1	48V DC

Part #	Color	Amps	Poles	Max.
7365	White	30A AC	2	80V DC
7251	White	50A AC	2	80V DC
7254	White	60A AC	2	80V DC
7256 <sup>†</sup>	White	80A AC	2	80V DC
7258 <sup>†</sup>	White	100A AC	2	65V DC
7267*†	White	150A DC	2	65V DC
7268*†	White	175A DC	2	65V DC
7269*†	White	200A DC	2	65V DC

Part #	Color	Amps	Poles	Max.
7287	White	50A AC	3	80V DC
7288	White	60A AC	3	80V DC
7289†	White	80A AC	3	80V DC
7290 <sup>†</sup>	White	100A AC	3	80V DC
7270*†	White	250A DC	3	65V DC
7271*†	White	300A DC	3	65V DC







**Cutout Dimensions** 

# C-Series Toggle Circuit Breaker Mounting Panels

\* Paralleled poles have 5/16" stud on bus. These breakers are not listed and pending UL approval.

† Only supports motor loads up to 48V DC, UL 1077 OL0


Simplifies mounting C-Series Toggle Circuit Breakers

- Accepts Blue Sea Systems Large Format Labels and ON indicating LEDs
- Panel plugs can be inserted to fill blank positions
- Panel Plug Kit 8089 included circuit breaker mounting screws, panel plug, LED plug and blank label

Part #	Description	Width In (mm)	Depth In (mm)
8088	3 position	5.25 (133.35)	3.75 (95.25)
8087	8 position	5.25 (133.35)	7.50 (190.50)
8089	Panel Plug Kit		



8088



8087

# **C-Series Rocker Circuit Breakers**

Combines switching and circuit protection into a single device











/540

#### **DC Features**

- White actuator indicates OFF position
- Large frame provides stud termination for 5-300A loads
- Flat rocker actuator is flush in the ON position, reducing the risk of accidental switching
- Provides overcurrent protection for inverters, bow thrusters, and windlasses
- Trip Free cannot be held closed after trip

Voltage Nominal Operating	120/240V AC
Temperature Operating	-40°C to 85°C (-40°F to 185°F)
Switching Cycles	10,000 @ rated amps and volts
Туре	Magnetic Hydraulic – Trip free
Terminal Stud	1/4"-20 Tin-Plated Brass
Terminal Stud Torque	35 in-lb max.
Trip Time Delay	See bluesea.com
Mounting Screw	#6-32 Stainless Steel (included)
Mounting Screw Torque	6–8 in-lb Recommended
Regulatory	Single-pole circuit breakers only – CE marked, meet SAE J1171, UL 1500 and ISO 8846 external ignition protection requirements, CSA certified, and UL 1077 recognized AC Circuit Breakers only – TUV certified, CSA certi- fied, and UL 1077 recognized AC and AC/DC Circuit Breakers only – CE marked



#### Interrupting Capacity Table (see ABYC Requirements p. 164)

			EN60934 - TUV (Europe)		
	Volts Amps DC Interrupt AC Interrupt				AC Interrupt
	48V DC		5,000A, U2, OL1		
1 Pole	125V DC			3,500A, U2, OL1	
1 Pole	250V AC	5-50A		3,500A, U2, OL1	
	250V AC	60-100A		3,000A, U2, OL0	
	48V DC		5,000A, U2, OL1		
2 Pole	125V AC			3,500A, U2, OL1	
	250V AC		5,000A, U1, OL1	3,000A, U2, OL0	1,500A

#### **AC Features**

- Used for 120/240V AC circuit protection
- Double pole can be used as AC Main circuit breaker to switch hot and neutral or two hots in 120/240V AC Branch applications
- Triple pole can be used as 120/240V AC Main circuit breaker to switch both lines (hots) and neutral
- Double and triple pole circuit breakers will trip all poles if any one pole trips

Part#	Amps	Max.	Poles	Actuator
7540	5A DC	48V DC	1	Flat
7541	10A DC	48V DC	1	Flat
7542	15A DC	48V DC	1	Flat
7543	20A DC	48V DC	1	Flat
7545	30A DC	48V DC	1	Flat
7546	50A DC	48V DC	1	Flat
7547	60A DC	48V DC	1	Flat
7548	80A DC	48V DC	1	Flat
7549	100A DC	48V DC	1	Flat

Part #	Amps	Max.	Poles	Actuator
7560	30A AC		2	Flat
7580	30A AC		2	Raised
7561	50A AC		2	Flat
7581	50A AC		2	Raised
7563	80A AC		2	Flat
7583	80A AC		2	Raised
7564	100A AC		2	Flat
7584	100A AC		2	Raised
7475*	150A DC	48V DC	2	Flat
7476*	200A DC	48V DC	2	Flat


Part #	Amps	Max.	Poles	Actuator
7565	50A AC		3	Flat
7585	50A AC		3	Raised
7568	50A AC		3	Flat
7588	100A AC		3	Raised
7477*	250A DC	48V DC	3	Flat
7554*	300A DC	48V DC	3	Flat


<sup>\*</sup> Paralleled poles have 5/16" stud on bus


#### **Related Product**



360 Panel System 1168 page 125








**Cutout Dimensions** 

# **TECH TIP**


#### **AC Ground Faults ELCI, the Boater and ABYC**

Understanding Equipment Leakage Circuit Interrupters (ELCIs) and Ground Fault Circuit Interrupters (GFCIs) to make your boat safer. There are two potential failures in a boat's electrical system that can put people on or around the boat at risk of lethal electric shock.


In a properly functioning marine electrical system, the same amount of AC current flows in the hot and neutral wires.

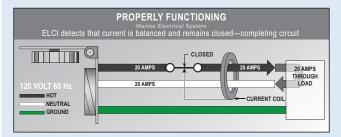

However, if electricity "leaks" from this intended path in these two wires to ground, this condition is called a ground fault. An example of this is an insulation failure in the wiring of an appliance.

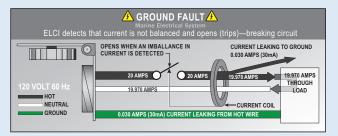

In addition, a faulty ground can occur when the grounding path is broken through a loose connection or broken wire. For instance, a shore power cord ground wire may fail due to constant motion and stress.

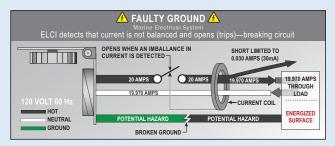

Faulty grounds can be undetectable; a simple continuity test will not necessarily reveal a problem. When these two conditions occur at the same time, the results may be tragic.

The combination of a ground fault and a faulty ground can result in metal parts on the boat and under water becoming energized. If an electric drill with faulty internal wiring or a worn cord falls into the bilge, the water in the bilge will become energized, putting the worker and those nearby at risk.

In addition to the hazard to people on the vessel, there is a larger danger to swimmers near the boat. While people on board are likely to receive a shock from touching energized metal parts, nearby swimmers could receive a paralyzing dose of electricity and drown due to involuntary loss of muscle control

A Coast Guard sponsored study showed numerous instances of electrical leakage causing drowning or potential drowning even though the shock did not directly cause electrocution.

Given the seriousness of the problem, ABYC requirements now include specific measures for avoiding this danger:

#### ABYC E-11.13.3.5 states:

If installed in a head, galley, machinery space, or on a weather deck, the receptacle shall be protected by a Type A (nominal 5 milliamperes) Ground Fault Circuit Interrupter (GFCI).


#### **ABYC E-11.11.1 states:**

An Equipment Leakage Circuit Interrupter (ELCI) shall be installed with or in addition to the main shore power disconnect circuit breaker(s) or at the additional overcurrent protection as required by E-11.10.2.8.3 whichever is closer to the shore power connection.

ELCIs, and the more familiar GFCIs (Ground Fault Circuit Interrupter), are part of a larger family of devices that measure current flow in the hot and neutral wires and immediately switch the electricity off if an imbalance of current flow is detected. ELCIs and GFCIs that are also RCBOs (Residual Current Circuit Breaker) provide overcurrent tripping protection characteristic of a normal circuit breaker.

GFCIs are used as branch circuit ground fault protection at the 5mA threshold in potentially wet environments. GFCIs protect against flaws in devices plugged into them, but offer no protection from the danger of a failing hard-wired appliance, such as a water heater or cook top.

In contrast, an ELCI provides additional whole-boat protection. Installed as required within 10' of the shore power inlet, an ELCI provides 30mA ground fault protection for the entire AC shore power system beyond the ELCI. ABYC regulations still require the use of GFCIs in environments described above.

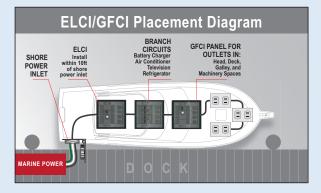

Although ABYC regulations apply only to new boat construction, ELCIs can mitigate dangers and liabilities that exist for any boat owner with a shore power connection. Retrofitting an ELCI to an existing AC system can be a worthwhile safeguard against risk. Since an ELCI/RCBO can serve as the main shore power circuit breaker, it can replace a standard circuit breaker in this application.

Alternatively, an ELCI/RCBO can be added between the shore power inlet and the existing main shore power circuit breaker. Safety ground system failures on boats are safety and liability disasters waiting to happen. ELCI protection on each shore power line, combined with protection afforded by GFCIs, will reduce risk to those on the boat, the dock, and in the water surrounding the boat.

\*The ABYC has an exemption to this rule if an isolation transformer is used. See E-11 for specific information regarding the exemption.

# **Residual Current Circuit Breakers**

#### **Equipment Circuit Interrupter (ELCI) Main**

Residual Current Devices (RCDs) respond to leakage of electrical current outside of the intended circuit path

When the RCD function is combined with a circuit breaker for over current protection, the device is often referred to as an RCBO. In the USA, a device that trips on leakages of nominally 5mA and meets certain standards is called a Ground Fault Circuit Interrupter (GFCI). A device meeting the same standards but with a trip level of 30mA is called an Equipment Leakage Circuit Interrupter (ELCI). The devices below provide ELCI Main functions and circuit protection in panel mounted breakers.

- · Trips on short circuit, overload, or leakage to ground
- For installation in a power distribution panel
- Provides overcurrent and leakage protection per ABYC E-11 for whole boat shore power protection

Part #	3102100, 3104, 3093	3091, 3092, 3103, 3106100
Interrupting Capacity	5,000A AC - UL 1077 U2	3,000A AC - UL 1077 U2
Temperature Operating	-35°C to 66°C (-31°F to 150°F)	-35°C to 66°C (-31°F to 150°F)
Switching Cycles	10,000 @ rated amps and volts	10,000 @ rated amps and volts
Туре	Magnetic Hydraulic – Trip free	Magnetic Hydraulic – Trip free
Mounting Screw	#6-32 Stainless Steel (included)	#6-32 Stainless Steel (included)
Mounting Screw Torque	6–8 in-lb Recommended	6–8 in-lb Recommended
Regulatory	UL 1077, UL 943 Class A	UL 1077, UL 943 Class A



Part #	Description	Frame Series	Nominal Voltage	Actuator	Poles	AC Main Amps	Leakage Trip Amps
3102100	ELCI Main	A-Series	120V AC per pole	Flat Rocker	2	30A	30mA
3103**	ELCI Main	C-Series	120V AC per pole	Flat Rocker	2	50A	30mA
3104	ELCI Main	C-Series	120/240V AC per pole	Flat Rocker	3	50A	30mA
3106100**	ELCI Main	A-Series	120V AC per pole	White Toggle	2	30A	30mA
3091**	ELCI Main	C-Series	230V AC per pole*	Flat Rocker	2	16A	30mA
3092**	ELCI Main	C-Series	230V AC per pole*	Flat Rocker	2	32A	30mA
3093	ELCI Main	C-Series	240V AC per polet	Flat Rocker	2	50A	30mA

<sup>\* 230</sup>V AC, Typical of Europe



3102100



3103, 3091, 3092, 3093





#### **Related Products**



AC GFCI Dual Outlets page 152, 153



SMS Surface Mount System page 88







<sup>\*\*</sup> Interrupting Capacity of 3000 A AC

<sup>† 240</sup>V AC, For isolation transformer applications

# **SMS Surface Mount System Panel Enclosure**

Panel enclosure for ELCI Main circuit breakers and other large frame devices. Meets ABYC E-11 when used with an ELCI Main circuit breaker and mounted within 10 feet of the shore power inlet

- · Blank apertures for custom breaker loading
- Clear cover allows easy view of circuit breaker status
- Blank circuit positions accommodate Carling Technologies™
   A and C Series Flat Rocker and ELCI Main circuit breakers
- · Stainless steel mounting hardware included

Enclosure Size	6.0" x 6.0" x 4.0" 152 mm x 152 mm x 102 mm
Exterior Overall Dimensions	7.6" x 7.4" x 4.7" 192 mm x 188 mm x 120 mm
Temperature Range	-40°C to 85°C (-40°F to 185°F) *
Cover Screws and Hardware	10-32 stainless steel
Mounting Hardware	Ø 1/4", #12, (6 mm)
Regulatory	IP66 – Protected against powerful water jets when cover is latched (see inside back cover) Flammability rating – Per UL 508, Toxicity – Non-toxic, halogen free, RoHS compliant, UL Listed and NEMA 4X rated, NEMA Type 4, 4X, 6, 6P, 12, and 13

<sup>\*</sup> Temperature range for SMS Enclosures with ELCI Main breakers installed: -35°C to 66°C (-31°F to 150°F)

Interrupting Capacity Table (see ABYC Requirements p. 164)











Part #	3113	3116	3121	3117
Description	6 blank positions	ELCI Main + 3 blank positions	ELCI Main + 2 blank positions	120V AC ELCI 30A Dual
Circuit Breakers		1 × ELCI Main 120V, 30A, 30mA (3102)	1 × ELCI Main 230V, 16A, 30mA (3091)	2 × ELCI Main 120V 30A, 30mA (3102)
Glands Included		2 × (3124)	3 × (3125)	2 × (3124) 4 × (3125)
LEDs Installed		3 × green ON 1	4 × green ON 120V AC (8034) 3 × green ON 120V AC (8034) 1 × red Reverse Polarity 120V AC (8066)	
Labels Included	30 Basic DC (4205) 30 Basic AC (4206) Panel Voltage ID	1 × AC Main, 1 Reverse Polarity 1 × ELCI, 30 Basic AC (4206) Panel Voltage ID		Source Selection label Set - 10 labels 2 × Reverse Polarity, 2 ELCI Panel Voltage ID









Part #	3118	3123	3119	3120	
Total Positions	ELCI Main + 2 blank positions		ELCI Main + 1 blank position	ELCI Main + 2 blank positions	
Circuit Breakers	1 × ELCI Main 120V 50A, 30mA (3103)	1 × ELCI Main 230V 32A, 30mA (3092)	1 × ELCI Main 120/240V, 50A, 30mA (3104)	1 × ELCI Main 240V, 50A, 30mA (3093)	
Glands Included	2 × (3124) 1	× (3125) 2 × (3126)	2 × (3124) 1 × (3125) 2 × (3126)	2 × (3124) 1 × (3125) 2 × (3126)	
LEDs Installed	3 × green ON indicating 120V AC (8034) 1 × red "Reverse Polarity" 120V AC (8066)		3 × green ON indicating 120V AC (8034) 1 × red Reverse Polarity 120V AC (8066)	2 × green ON indicating 240V AC (6806)	
Labels Included	1 × AC Main, 1 Reverse Polarity 1 × ELCI, 30 Basic AC (4206) Panel Voltage ID		1 × AC Main, 1 Reverse Polarity 1 × ELCI, 30 Basic AC (4206) Panel Voltage ID	1 × AC Main, 1 ELCI Panel Voltage ID	







Part #	3122	3128	3130
Description	ELCI Main + 2 branch positions	ELCI Main + 3 branch positions	UL 489 AC Main + 4 branch positions
Circuit Breakers	1 × ELCI Main 230V, 16A, 30mA (3091)	1 × ELCI Main 120V, 30A, 30mA (3102)	1 × Main 120V, 50A (7467)
	2 x Branch, 8A (7401)	3 x Branch, 15A (7403)	3 x Branch, 15A (7456)
Glands Included	2 × (3124) 3 × (3125)	2 × (3124) 3 × (3125)	2 × (3124) 3 × (3125)
LEDs Installed	3 × green ON indicating 230V AC (8134)	4 × green ON indicating 230V AC (8134)	5 × green ON indicating 120V AC (8034)
	1 × red Reverse Polarity 230V AC (8166)	1 × red Reverse Polarity 230V AC (8166)	1 × red Reverse Polarity 120V AC (8066)
Labels Included	1 × AC Main, 1 Reverse Polarity	1 × AC Main, 1 Reverse Polarity	1 × AC Main, 1 Reverse Polarity
	1 × ELCI, 30 Basic AC (4206)	1 × ELCI, 30 Basic AC (4206)	1 × 30 Basic AC (4206)
	Panel Voltage ID	Panel Voltage ID	Panel Voltage ID







Part #	3133	3134	3135	
<b>Total Positions</b>	DC Main + 5 branch positions	DC 6 branch positions	UL 489 DC Main + 5 branch positions	
Circuit Breakers	1 x Main 12/24V DC, 100A (7549) 3 x Branch 12/24V DC, 15A (7403)	4 x Branch 12/24V DC, 15A (7403)	1 x Main 12/24V DC, 100A (7446) 3 x Branch 12/24V DC, 15A (7442)	
Glands Included	2 × (3124) 2 × (3125) 1 x (3126)	2 × (3124) 2 × (3125) 1 x (3126)	2 × (3124) 2 × (3125) 1 x (3126)	
LEDs Installed	6 x amber ON indicating 12/24V DC (8033)	6 x amber ON indicating 12/24V DC (8033)	6 x amber ON indicating 12/24V DC (8033)	
Labels Included	1 × DC Main 30 Basic DC (4218) Panel Voltage ID 12V and 24V DC	30 Basic DC (4218) Panel Voltage ID 12V and 24V DC	30 Basic DC (4218) Panel Voltage ID 12V and 24V DC	

# **SMS Surface Mount System Panel Enclosure Glands**

Used on the SMS Surface Mount System Panel Enclosures



Small Gland PG7

#14 to #10 Single Wire

.114 in (2.9 mm)

.250 in (6.4 mm)

A. Clearance Hole .492 (12.5) B. Max. O. A. Length 1.17 (29.7) C. Wrenching Flats .59 (15.0)



3125

Medium Gland PG16

#14 to #10 Cable, 3 Conductor


.230 in (2.9 mm)

.530 in (2.9 mm)

A. Clearance Hole .886 (22.5) B. Max. O. A. Length 1.66 (42.2) C. Wrenching Flats 1.05 in (26.7)



3126
Large Gland PG29
#6 Cable, 4 Conductor
.590 in (15.0 mm)
.990 in (25.4 mm)
A. Clearance Hole 1.47 (37.3) B. Max. O. A. Length 2.23 (56.6) C. Wrenching Flats 1.66 (42.2)



**Related Products** 

Part #

Description

Cable Dia. Minimum

Cable Dia. Maximum

Dimensions in (mm)

Wire Size



UL-489 Circuit Breakers page 81



Circuit Breaker Enclosure page 82



A-Series Rocker Circuit Breakers page 83



C-Series Rocker Circuit Breakers page 85



ELCI Circuit Breakers page 87

# **Circuit Breaker Specification Table**

# **DC Thermal Circuit Breakers**

90













					•	•
Page #	75	76	76	77	78	79
Product	Push Button Reset-Only	Medium Duty Push But- ton Reset-Only	Short Stop	ATO/ATC-Style Low Profile	285-Series	187-Series
Interrupting Capacity	3,000A @ 14.7V DC 2,500A @ 28V DC	5,000A @ 32V DC 3,000A @ 120V AC	2,500A @ 28V DC	2,000A @ 28V DC	3,000A @ 48V DC†	5,000A @ 14V DC 3,000A @ 28V DC 1,500A @ 48V DC
Max. Voltage	32V DC	32V DC / 120V AC	28V DC	32V DC	48V DC	48V DC
Amperages	3-40A	15-60A	5-50A	5-30A	25-150A	25-200A
Regulatory	EN 60934, CE marked, UL 1077, TUV certified, UL 1500, ISO 8846	SAE J553, UL 1077, UL 1500	SAE J553, SAE J1171, IP64	SAE J553, SAE J1171	CE marked, SAE J1171, IP67	CE marked, SAE J1171, IP66

<sup>†</sup> AIC ratings achieved using SAE J1625

#### **AC/DC A-Series Circuit Breakers**













Page #	82	83	83	82	83	83
Product	A-Series Toggle	A-Series Flat Rocker	A-Series Restricted Off Rocker	A-Series Toggle	A-Series Flat Rocker	A-Series Raised Rocker
Interrupting Capacity DC	5,000A @ 32V DC, U2 7,500A @ 65V DC, U1		32V DC, U2 65V DC, U1	5,000A @ 32V DC, U2 7,500A @ 65V DC, U1	5,000A @ 32V DC, U2 7,500A @ 65V DC, U1	
Interrupting Capacity AC	2,000A @ 125V AC, U2 1,500A @ 250V AC, TUV	(2A-30A) 3,000A @ 125V AC, U2 (40A-50A) 1,500A @ 125V AC, U2 1,500A @ 250V AC, TUV		3,000A @ 125V AC, U2 1,500A @ 250V AC, TUV	3,000A @ 125V AC, U2 1,500A @ 250V AC, TUV	
Max. Voltage DC	65V DC	65\	65V DC		65V DC	
Max. Voltage AC		250	OV AC	250V AC		
Poles		1			2	
Amperages	2.5–50A 2.5–50A 10–50A					
Regulatory		CE marked, TUV certified, CSA certified, UL 1077				

# AC/DC Military Grade and C-Series Circuit Breakers













	2011		34	• 1		
Page #	80	81	81	84	84	85
Product Style	COTS Water Resistant	AC UL-489 Rocker	DC UL-489 Rocker	C-Series Toggle	C-Series Toggle	C-Series Flat Rocker
Interrupting Capacity DC	5,000A @ 32V DC, U2 7,500A @ 65V DC, U1		10,000A @ 80V DC	5,000A @ 48V DC, U2 7,500A @ 48V DC, U1	5,000A @ 48V DC, U2 7,500A @ 48V DC, U1	5,000A @ 48V DC, U2 5,000A @ 65V DC, U1
Interrupting Capacity AC	2,000A @ 125V AC, U2 5,000A @ 250V AC, U1	5,000A @ 240V AC		3,500A @ 125V AC, U2 3,000A @ 250V AC, U2	3,500A @ 125V AC, U2 3,000A @ 250V AC, U2	3,500A @ 125V AC, U2 3,000A @ 250V AC, U2
Max. Voltage DC	65V DC		80V DC	48-80	48-80V DC	
Max. Voltage AC		250V AC		250	V AC	250V AC
Poles	2	1 & 2		•	1	
Amperages	5-50A	5-50A	5-100A	5-100A	100A	5-100A
Regulatory	UL 1077, CSA certified	UL 489, CSA certified, TUV certified			SAE J1171, UL 1500, ISO 8846	CE marked, SAE J1171, UL 1500, ISO 8846, CSA certified, UL 1077

# **DC C-Series Circuit Breakers**









Page #	84	85	84	85	
Product Style	C-Series Toggle	C-Series Flat Rocker	C-Series Toggle	C-Series Flat Rocker	
Interrupting Capacity	5,000A @ 48V DC, U2 5,000A @ 65V DC, U1	5,000A @ 48V DC, U2	5,000A @ 48V DC, U2 5,000A @ 65V DC, U1	5,000A @ 48V DC, U2	
Max. Voltage	65V DC	48V DC	65V DC	48V DC	
Poles	2	2	3		
Amperages	150-	200A	250-3	300A	
Regulatory					

### **AC C-Series Circuit Breakers**













Page #	84	85	85	84	85	85
Product Style	C-Series Toggle	C-Series Raised Rocker	C-Series Flat Rocker	C-Series Toggle	C-Series Raised Rocker	C-Series Flat Rocker
Interrupting Capacity	3,500A @125V AC, U2 3,000A @250V AC, U2		25V AC, U2 50V AC, U2	3,500A @125V AC, U2 3,000A @250V AC, U2	3,500A @12 3,000A @25	
Max. Voltage	250V AC	250	250V AC		250V AC	
Poles	2			3		
Amperages	30-100A			50-100A		
Regulatory			TUV certified, ed, UL 1077		CE marked, T CSA certified	

# **AC ELCI Main Circuit Breakers**











Page #	87	87	87	87	3091* (87)	3092* (87)	3093† (87)
Product	ELCI Main	ELCI Main	ELCI Main	ELCI Main		ELCI Main	
Interrupting Capacity	5,000A, U2	3,000A, U2	3,000A, U2	5,000A, U2	3,000A, U2	3,000A, U2	5,000A, U2
Nominal Voltage				120/240V per pole	230V p	er pole	240V per pole
Amperage	30	)A	50A	50A	16A	32A	50A
Leakage Trip Amps	30mA			30mA		30mA	
Regulatory	III 1077 III 943 Class A						

UL 1077, UL 943 Class A

<sup>\* 230</sup>V AC, Typical of Europe † 240V AC, For isolation transformer applications

# **Water-Resistant Contura Switches**

Specifically manufactured for use in Blue Sea Systems Contura Water-Resistant Panels



Use of non Blue Sea Systems Contura Switches will not maintain the water resistant ingress protection rating of Blue Sea Systems panels.

- Vibration, shock, thermoshock, moisture and salt spray resistant
- Mounts in Blue Sea Systems Contura Water Resistant Panels (p. 114) and Contura Switch Mounting Panels (p. 94)

Amperage Max. Operating	20A @ 12V DC, 15A @ 24V DC
Amperage Operating Current	18 Milliamps
Lighted	LED rated 100,000 hours half-life
Seals	Internal and external gasket panel seal
Temperature Rating	-40°C (-40°F) to 85°C (185°F)
Mounting Hole	1.45 in x 0.83 in (36.83 mm x 21.08 mm)
Regulatory	CE marked, meets UL 1500 and ISO 8846 external ignition protection requirements

# IGNITION PROTECTED

Part # Contura II Black	Part # Contura III Gray	Part # Contura III Black	Actuator Position to Light LED	Pole Throw	Action	LEDs
7929	8230	8282	ON	SPST	OFF-ON	1
7930	8231	8292		SPST	OFF-(ON)	0
7931	8232	8283	ON	SPDT	ON-OFF-ON	2
7932	8233	8284	ON	SPDT	(ON)-OFF-ON	1
7933	8234	8285		SPDT	(ON)-OFF-(ON)	0
7943	7944	7945	(ON)	SPDT	(ON)-OFF-ON	1
7934	8218	8287	ON	DPST	OFF-ON	1
7935	8219	8288		DPST	OFF-(ON)	0
7936	8220	8286	ON	DPDT	ON-OFF-ON	2
7937	8221	8289	ON	DPDT	(ON)-OFF-ON	1
7938	8222	8290		DPDT	(ON)-OFF-(ON)	0
7939	8275	8300	ON	DPDT	ON-ON	2

See p. 97 for common applications

( ) = Momentary

# Water-Resistant Contura Dimmer and **M**-LVD Switches




- Mounts in Blue Sea Systems Contura Water-Resistant Panels (p. 114) and Contura Switch Mounting Panels (p. 96)
- Dimmer Switch Legend BRIGHT and DIM
- m-LVD Switch Legend-OVERRIDE and OFF
- Ignition protected safe for installation aboard gasoline powered boats

Amperage Max. Operating	20A @ 12V DC, 15A @ 24V DC
Pole, Throw	SPDT
Action	(ON)-OFF-(ON)
Terminal Size	0.25 in (6.35 mm)
Terminal Type	Quick Connect Tab
Seals	Internal and external gasket panel seal
Temperature Rating	-40°C (-40°F) to 85°C (185°F)
Mounting Hole	1.45 in x 0.83 in (36.83 mm x 21.08 mm)
Regulatory	CE marked

Part #	For Use With:	LEDs
8216	DeckHand Dimmer (p. 27)	
8291	DeckHand Dimmer (p. 27)	
7928	m-LVD Low Voltage Disconnect (p. 40)	1

See p. 97 for common applications

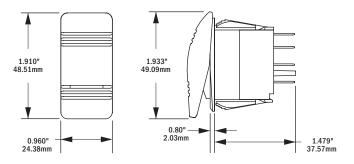

#### **Related Products**



Contura Circuit Breaker Panels page 114



Contura Fuse Panels page 114

#### **Related Products**



DeckHand Dimmers page 27



m-LVD page 40

# **Remote Control Contura Switches**

Provide remote switching of ML-Series Products





2145, 2155


- · Vibration, shock, thermoshock, moisture and salt spray resistant
- Lockout slide reduces the risk of accidental switching 2145 and 2155

Amperage Max. Operating	20A @ 12V DC, 15A @ 24V DC
Amperage Operating Current	18mA
Temperature Range	-40°C (-40°F) to 85°C (185°F)
Pole/Throw	SPDT
Lighting	LED rated 100,000 hours half-life
Seals	Internal and external gasket panel seal
Mounting Hole	1.45" x 0.83" (36.83 mm x 21.08 mm)
Regulatory	Meets UL 1500 and ISO 8846 external ignition protection requirements, IP67 – protected against immersion up to 1 meter for 30 minutes (see inside back cover)

Part #	For Use With:	Pole Throw	Action
2145	ML-Series 7700, 7702, (p. 43) 7701, 7703, (p. 40)	SPDT	(ON)-OFF-(ON)
2146	ML-Series 7620, 7622, 7621, 7623 (p. 51)	SPDT	ON-OFF-ON
2155	ML-Series 7713, 7717 (p. 43)	SPDT	ON-ON

See p. 97 for common applications

( ) = Momentary

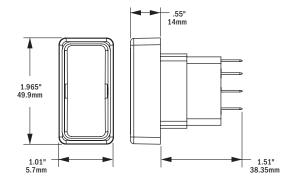

#### **Related Products**



page 43



page 51


# **Contura Switch Mounting Panel Plug**

Covers Contura Switch mounting hole for future switch installation



• For use with Contura Switch Mounting Panels

Part #	Description
8278	Contura Switch Mounting Panel Plug

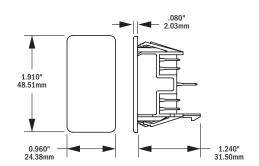

#### **Related Products**



Contura Switch Mounting Panels page 94

# **Contura Switch Actuators**

Replaces actuators on Blue Sea Systems Contura Water-Resistant Panels







• Mounts on any Blue Sea Systems Water Resistant Contura Switch


Part # Gray	Part # Black	Lenses
8299	8296	
8297	8294	1
8298	8295	2
8293	Actuator Removal Tool	

# **Remote Control Switch 360 Panels**

Use with ML-Series Remote Battery Switches or Automatic Charging Relays

- · Backlit labels
- · Lockout slides
- Square format label set 4218 (p. 154)








1148 Switches: 2145 (3) 24V DC Max.

Part #	Description	Width in (mm)	Height in (mm)	Depth in (mm)
1147	2 RBS and 1 ACR	4.88 (123.83)	4.75 (120.65)	2.00 (50.80)
1148	3 RBS	4.88 (123.83)	4.75 (120.65)	2.00 (50.80)
1520	3 Blank Apertures	4.88 (123.83)	4.75 (120.65)	0.125 (3.175)

# **Contura Switch Mounting Panels**

Modular design permits assembly in groups

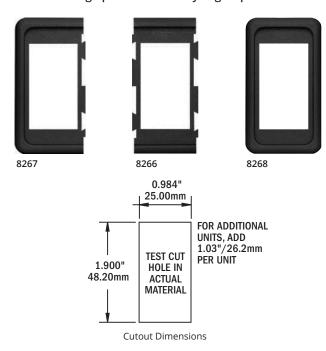

- Mounting panels available in 1, 3, and 6 fixed position models
- Designed for mounting in 6 different panel thicknesses:
   0.06 in (1.57 mm)
   0.09 in (2.36 mm)
   0.13 in (3.17 mm)
   0.19 in (4.75 mm)
   0.25 in (6.35 mm)
   0.38 in (9.52 mm)

Part #	Description	Width in (mm)	Height in (mm)
8267	End Mounting Panel	1.19 (30.23)	2.30 (58.42)
8266	Center Mounting Panel	1.03 (26.16)	2.30 (58.42)
8268	1 Position Mounting Panel	1.34 (34.04)	2.30 (58.42)
8259	3 Position Mounting Panel	3.40 (86.36)	2.30 (58.42)
8260	6 Position Mounting Panel	6.49 (164.85)	2.30 (58.42)

# **Dual Bilge Pump 360 Panel**

Controls two bilge pumps with restricted-off circuit breakers and manual override switches

- · Controls two bilge pumps
- Restricted-OFF circuit breakers provide 24-hour circuit protection to the bilge pump float switch
- On-indicating LED indicates power is available at the bilge pump float switch
- Manual override switch with on-indicating LED provides visual indication pump is running; also illuminates when pump is running as a result of float switch operation



Part #	Description	Width in (mm)	Height in (mm)
1522	Dual Bilge Pump Control Panel	4.88 (123.83)	4.75 (120.65)

#### 360 Panel Rocker Switches

Provides switching options for different configurations

Amperage Max. Operating	See table below
Single Pole Connections	0.187 in (4.80 mm) Quick Connect Tabs
Double Pole Connections	6.00 in (152.00 mm) Wire Leads

					os Max	. Opera	ting AC
Part #	Pole/Throw	Image	Action	12V	24V	125V	250V
7480	SPST	1	OFF-ON	10A	10A	10A	10A
7481	SPST	1	OFF-(ON)	10A	10A	12A	6A
7482	SPDT	2	ON-OFF-ON	10A	8A	8A	8A
7483	SPDT	2	(ON)-OFF-ON	10A	8A	8A	8A
7484	SPDT	2	(ON)-OFF-(ON)	10A	8A	8A	8A
7485	SPDT	4	(ON)-OFF-(ON)	10A	8A	8A	8A
7490	DPST	1	OFF-ON	5A	5A	8A	4A
7491	DPDT	3	ON-ON	5A	5A	8A	4A
7492	DPDT	2	ON-OFF-ON	5A	5A	8A	4A
7493	DPDT	3	ON-(ON)	5A	5A	8A	4A
7494	DPDT	2	(ON)-OFF-ON	5A	5A	8A	4A
7495	DPDT	2	(ON)-OFF-(ON)	5A	5A	8A	4A

See p. 97 for common applications











#### **Recommended Panel Opening**

PANEL THICKNESS	А	В
.030" (.76mm)050" (1.27mm)	.508" (12.90mm)	.756" (19.20mm)
.050" (1.27mm)078" (1.98mm)	.508" (12.90mm)	.764" (19.40mm)
.078" (1.98mm)125" (3.17mm)	.508" (12.90mm)	.780" (19.81mm)



#### **Push Button Switches**

#### Contemporary and compact 10A, 15A, & 20A switching

- Two push button illumination options to choose from backlit and LED ring
- 316 Stainless Steel for optimal appearance and corrosion resistance
- IP67 waterproof with O-ring panel gasket and molded rear cover
- · Reverse polarity protected

Part #	4160, 4161, 4162, 4163
Amperage Max. Operating	10A @ 12V DC
Voltage Nominal	12V DC
Max. LED Operating Current	20mA
Switching Cycles	40,000
Temperature Range	-10°C to 70°C (14°F to 158°F)
Termination	5 – 0.110" Quick Connect tabs terminals included
Wire Size	
Panel Thickness	.04"31" (1-8mm)
Mounting Hole Diameter	3/4" (19mm)
Regulatory	ISO 8846, SAEJ1171, UL 1500. IP67 – protected against immersion up to 1 meter for 30 minutes (see inside back cover)

Part #	4180 & 4181
Amperage Max. Operating	15A @ 12V DC
Voltage Nominal	12V DC
Max. LED Operating Current	20mA
Switching Cycles	10,000
Temperature Range	-20°C to 55°C (-4°F to 131°F)
Termination	3" Bare Pigtails
Wire Size	8-16 AWG
Panel Thickness	.04"24" (1-6mm)
Mounting Hole Diameter	7/8" (22.35mm)
Regulatory	IP67 – protected against immersion up to 1 meter for 30 minutes (see inside back cover)



5 ICON labels included

#### **Push Button Switch Label Kit**

#### ICON Labels used on Backlit Push Button Switches

- Scratch resistant polycarbonate material
- · Back printed for durability
- Waterproof adhesive for longevity in wet environments
- Can be ordered individually (p. 154)



# Part # Description Quantity 4230 | Icon Label Kit | 50 labels

# **10A LED Ring Push Button Switches**



Part #	LED	Action
4160	Blue	OFF-ON
4161	Blue	OFF-(ON)
4162	Red	OFF-ON
4163	Red	OFF-(ON)

See p. 97 for common applications

( ) = Momentary

#### **15A Backlit Push Button Switches**

- Backlit button is blue when OFF and red when ON
- Five ICON labels included: Accessory, Lights, Anchor Light, Running Light, and Bilge Pump
- Additional 50 ICON label kit sold separately



Part #	LED	Action	
4180	Blue / Red	OFF-ON	
4181	Blue / Red	OFF-(ON)	

See p. 97 for common applications

( ) = Momentary

#### **Related Products**







Individual Round Icon Labels page 154

# **WeatherDeck® Toggle Switches**

For use in WeatherDeck Waterproof Panels



- Manufactured for use in WeatherDeck Waterproof Panels (p. 115)
- Nickel-plated brass and phenolic non-corrosive construction

Part #	4150-4154	4155
Amperage Max. Operating	10A @ 250V AC 15A @ 125V AC 15A @ 12V DC	5A @ 30V DC
Voltage Max. Operating	250V AC	30V DC
Terminal Size	0.25 in (6.35 mm)	0.25 in (6.35 mm)
Terminal Type	Quick Connect Tab	Quick Connect Tab

Part #	Pole/Throw	Action ( ) = Momentary
4150	SPST	OFF-ON
4151	SPST	OFF-(ON)
4152	SPDT	ON-OFF-ON
4153	SPDT	(ON)-OFF-ON
4154	SPDT	(ON)-OFF-(ON)
4155	DPDT	ON-OFF-ON

<sup>( ) =</sup> Momentary

# WeatherDeck® Toggle Switch Boot

Replaces boot on WeatherDeck Waterproof Panels



- For mounting on WeatherDeck Toggle Switches above
- UV resistant material resists discoloration and cracking
- Rated IP67 protected against immersion up to 1 meter for 30 minutes (See inside back cover)

Part #	4138	
Thread Material	Nickel Plated Brass	
Thread	15/32"-32UNS-2A	

#### Related Products



WeatherDeck Panels page 115

## **Panel Switches**

Mounts in an A-Series toggle circuit breaker aperture to provide multiple throw and switch configurations when circuit protection is provided elsewhere





- Ideal for generator starters, bilge pumps, horns, wipers, engine controls and other applications that require switching action other than ON-OFF or different pole configuration separate from circuit protection
- For use with A-Series Toggle Circuit Breaker Mounting Panel (p. 82)
- Supplied with mounting adapter for standard 5/8" circuit breaker mounting hole
- Nickel-plated brass and phenolic non-corrosive construction

	Toggle	Push Button
Amperage Max. Operating	10A @ 250V AC 15A @ 125V AC 15A @ 32V DC	3A @ 250V AC 6A @ 125V AC 6A @ 32V DC
Terminal Size	0.25 in (6.35 mm)	0.25 in (6.35 mm)
Terminal Type	Quick Connect Tab	Quick Connect Tab
Actuator Color	White	White

Part#	Actuator	Pole/Throw	Action ( ) = Momentary
8200	Push Button	SPST	OFF-(ON)
8204	Toggle	SPST	OFF-ON
8205	Toggle	SPST	OFF-(ON)
8206	Toggle	SPDT	ON-OFF-ON
8207	Toggle	SPDT	(ON)-OFF-ON
8208	Toggle	SPDT	(ON)-OFF-(ON)
8209	Toggle	DPST*	OFF-ON-(ON) / OFF-OFF-(ON)
8210	Toggle	DPST	OFF-ON
8211	Toggle	DPDT	ON-OFF-ON
8212	Toggle	DPDT	(ON)-OFF-ON

<sup>\*</sup> Progressive two circuit switch - maintains Circuit 1 while momentarily switching Circuit 2

# **360 Panel Adapters and Plugs**

Adapters allow mounting alternative switches and circuit breakers in the flat rocker aperture. Plugs fill empty flat rocker apertures.



Part#	Description			
4111	4111 Adapts Push Button Reset-Only Circuit Breaker (p. 75)			
4112 Adapts A-Series Toggle Circuit Breaker (p. 82) and Panel Switch				
4119	Adapts 360 Panel Rocker Switch (p. 94)			
4116	4116 Panel Plug fills flat rocker circuit breaker aperture			
4117	Panel Plug fills 360 Panel Rocker Switch aperture			
8037	Panel Plugs fill Toggle Circuit Breaker aperture (6 pack)			

<sup>( ) =</sup> Momentary

# **Switch Comparison**

SPST Turns a single circuit on and off.
SPDT Turns one of two circuits on. DPST Turns two circuits on at the same time.

Contura II Black	Contura III Gray	Contura III Black	Contura ML Control	360 Panel Rockers	LED Ring Push-Button	Backlit Push- Button	WeatherDeck® Toggle	Panel Switch	Panel Switch
p. 92	p. 92	p. 92	p. 93	p. 94	p. 95	p. 95	p. 96	p. 96	p. 96
								-	_

	one circuit in o	each of	p. 92	p. 92	p. 92	p. 93	p. 94	p. 95	p. 95	p. 96	p. 96	p. 96
Switch Type	Action	Common Applications					0)	0)	6)			
SPST	Off-On	Lights	7929	8230	8282	-	7480	4160 4162	4180	4150		8204
SPST	Off-(On)	Horn or Windshield wipers	7930	8231	8292	-	7481	4161 4163	4181	4151	8200	8205
SPDT	On-Off-On	Combining nav lights or anchor light with independent bulbs	7931	8232	8283	2146	7482			4152		8206
SPDT • ♀ •	(On)-Off-On	Windshield wipers LED - ON	7932	8233	8284		7483			4153		8207
•		Bilge pumps LED - (ON)	7943	7944	7945							
SPDT	On-On	Control switch for SafetyHub 250 and ML-Series RBS 7712 and 7714				2155						
SPDT	(On)-Off-(On)	Intermittent wiper, Trim tabs, Control switch for ML-Series RBS except 7712 and 7714	7933	8234	8285	2145	7484 7485			4154		8208
DPST /	Off-On	Navigational lights	7934	8218	8287		7490					8210
DPST /	Off-(On)	Wipers or horn	7935	8219	8288							
DPST/	Off-On-(On) Off-Off-(On)	Combining nav lights and anchor lights with shared switch										8209
DPDT	On-Off-On	Combining nav lights with anchor light with shared bulb	7936	8220	8286		7492			4155		8211
DPDT	(On)-Off-On	Dual wipers	7937	8221	8289		7494					8212
DPDT	(On)-Off-(On)	Power operated hatches	7938	8222	8290		7495					
DPDT	On-(On)	Bilge pump with 2 circuits					7493					

( ) = Momentary Center Terminal Switch Lever Terminal Off Position

7939

8275

8300

7491

Switching between shunts or current transformers with

one meter

On-On

# **CONNECTORS** & INSULATORS

Water-Resistant 100A BusBar

**Common BusBars** 

**Terminal Blocks** 

**PowerBars** 



100

Provides secure water-resistant bussing for harsh environments.



100

BusBars distribute positive wires or collect negative returns. BusBars range in capacity from 100A to 600A.



103

Terminal blocks allow termination of wires from a multi-conductor cable in one location. Individual wires can then be split off to various loads.



104

Complex wiring systems require a single point to consolidate large and small conductors.



# **CONNECTORS & INSULATORS**

#### **PowerPost Connectors**



## 106

Insulated single stainless steel stud terminates multiple large conductors, or collects small wires with tin-plated copper bus.

#### Terminal Feed Through Connectors



## 106

Eliminates chafe and provides strain relief when passing high current through hulls, decks, and bulkheads.

#### CableCaps



#### 109

Provides insulation for multiple types of battery posts.

#### CableClams



#### 109

Provides a waterproof pass-through for antenna cables without requiring removal of the factory installed connector.



Connectors and BusBars are the backbone of every electrical system and safely keep current flowing.

Blue Sea Systems' connectors and busbars reduce heat and improve efficiency and reliability in a boat or vehicle's electrical system.

# Water-Resistant - 100A BusBar

Provides secure water-resistant bussing for harsh environments.


- · Water-resistant IP66 design
- Accepts standard ring or fork type terminals to allow for simple wiring with standard tools.
- · Accepts a wide range of wire sizes
- Integral plugs maintain water-resistant rating if less than four loads are required
- Nests with Water-Resistant 100A Common BusBar (2356 or 2356100) and ST-Blade Water-Resistant Fuse Block (5056 or 5056100)
- Ideal for positive distribution or for the collection of DC negative or AC grounding conductors
- · Tin-plated copper busses
- · Includes four write-on circuit labels
- · Small format standard and custom labels available

Continuous Rating	100A AC / 100A DC
Voltage Max. Operating	300V AC / 48V DC
Input Wire Size	(1) 8 AWG to 4 AWG
Load Wire Size	(4) 16 AWG to 10 AWG
Mounting Holes	Accepts 1/4" (6mm) Screws
Bus Material	Tin-Plated Copper C11000
Regulatory	CE & UKCA certified, for an ABYC/USCG compliant design use (2356100) CE marked, IP66 - protected against powerful water jets (see inside back cover)

Part #	Cover	Terminal Screws	Terminal Studs
2356	Screw Cover	4 × #8-32	1 × #10-32
2356100	Manual Cover	4 × #8-32	1 × #10-32

For dimensioned drawings see page 62



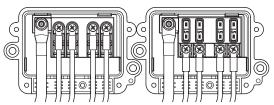

Nested ST-Blade Water-Resistant Fuse Block 5056 and Water-Resistant - 100A BusBar 2356

#### **Related Products**



ST-Blade Water-Resistant Fuse Block page 62

# **MiniBus - 100A Common BusBars**

#### Provides busing for limited space applications

One-piece serrated flange nut ensures correct and secure connections


Continuous Rating	100A AC / 100A DC
Voltage Max. Operating	300V AC / 48V DC
Mounting Holes	Accepts #10 (M5) Screws
Bus Material	Tin-Plated Copper C11000
Regulatory	CE & UKCA certified


Part #	Cover	Terminal Screws	Terminal Studs
2304		5 × #8-32	2 × #10-32
2314	Yes	5 × #8-32	2 × #10-32
2305			4 × #10-32
2315	Yes		4 × #10-32
2306		6 × #8-32	
2713	Cover For M	liniBus 2304 and 2305	














#### **DualBus - 100A Common BusBars**

#### Combines two buses on one block


 Combines negative and positive buses for DC Systems and neutral and ground buses for AC Systems


Continuous Rating	100A AC / 100A DC
Voltage Max. Operating	300V AC / 48V DC
Bus Material	Tin-Plated Copper C11000
Regulatory	CE & UKCA certified

Part#	Cover	Terminal Screws	Mounting Holes		
2701		5 per bus × #8-32	Accept #10 (M5) Screws		
2702		10 per bus × #8-32	Accept #10 (M5) Screws		
2709	Cover for 2701				
2710	Cover for 2702				









#### **DualBus Plus - 150A Common BusBars**

Secure, clear polycarbonate cover snaps on easily to meet ABYC insulation requirements

- Combines negative and positive buses on one block
- Cover release buttons
- One-piece stainless flange nuts ensure safe and secure connections

Continuous Rating	130A AC / 150A DC
Voltage Max. Operating	300V AC / 48V DC
Mounting Holes	Accept #10 (M5) Screws
Bus Material	Tin-Plated Copper C11000
Regulatory	CE & UKCA certified

Part #	Terminal Screws	Terminal Studs
2722	5 per bus × #10-32	2 per bus × 1/4"-20 Stud
2723	5 per bus × #10-32	2 per bus × 5/16"-18 Stud



#### **150A Common BusBars**

Insert-molded stainless steel studs eliminate the need for securing nuts and allow high torquing for excellent electrical contact

- For positive distribution and for the collection of negative or AC ground circuits
- One-piece serrated flange nut ensures correct and secure connections

Continuous Rating	130A AC / 150A DC
Voltage Max. Operating	300V AC / 48V DC
Mounting Holes	Accepts #10 (M5) Screws
Bus Material	Tin-Plated Copper C11000
Regulatory	CE & UKCA certified

Part #	Cover	Terminal Screw	Terminal Stud
2301		10 × #8-32	2 × 1/4"-20
2300	Yes	10 × #8-32	2 × 1/4"-20
2302		20 × #8-32	2 × 1/4"-20
2312	Yes	20 × #8-32	2 × 1/4"-20
2303			4 × 1/4"-20
2307	Yes		4 × 1/4"-20
2715	Cover 2301 and 2303		
2716	Cover for 230	2	

Note: 2715 replaces 2706, 2716 replaces 2707







02 CONNECTORS & INSULATORS

# **MaxiBus-250A Common BusBars**

Insert-molded stainless steel studs and optional fully enclosed insulating base and cover

- Insulating cover with breakouts for easy wire access
- Insulating cover meets ABYC insulation requirements
- One-piece serrated flange nuts ensure correct and secure connections

Continuous Rating	250A AC / 250A DC
Voltage Max. Operating	300V AC / 48V DC
Mounting Hardware	#10 (M5) Screws
Bus Material	Tin-Plated Copper C11000
Regulatory	CE & UKCA certified













#### 2719 Related Products








DC Shunts page 149


#### 2718 Related Product




PowerBar 600A Common BusBar 2104 page 104

Part#	Terminal Studs	Terminal Screws	[A] Length in (mm)	[B] Mounting Centers in (mm)
2105	2 × 5/16" -18	12 × #10-24	7.75 (197.00)	7.125 (181.00)
2126	6 × 5/16" -18	-	7.75 (197.00)	7.125 (181.00)
2718	Cover for 2105 and	2126	8.78 (223.10)	5.41 (137.30)
2127	4 × 5/16" -18	-	5.875 (149.00)	5.25 (133.00)
2128	2 × 5/16" -18	6 × #10-24	5.875 (149.00)	5.25 (133.00)
2719	Cover for 2127 and	2128	6.70 (170.00)	4.10 (104.10)








# **PowerBar Common BusBars**


Provides compact high-amp busing with 3/8" terminal studs



Continuous Rating	up to 200A
Voltage Max. Operating	48V DC
Mounting Holes	Accepts #10 (M5) Screws
Bus Material	Tin-Plated Copper C11000
Regulatory	CE & UKCA certified

Part #	Terminal Studs	Insulators
2019	2 × 3 / 8" -16	Yes
2020	2 × 3 / 8" -16	






# **Terminal Blocks**


#### Fully insulated independent terminal blocks

- Each screw pair is one isolated circuit
- Terminal Block Jumpers allow creation of common circuits
- Closed back design insulates power from the mounting surface


Bus Material	Nickel-Plated Brass
Base Material	High temp UL 94 VO thermoplastics
Regulatory	RoHS and UL Recognized, CE & UKCA certified

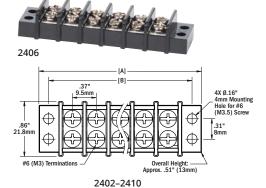



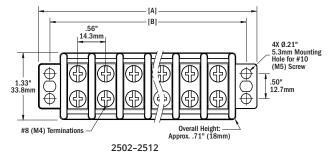



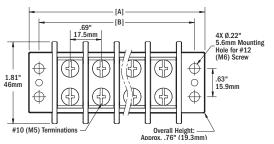

2602-2610

Part #	Circuits	AC/DC Amps	AC/DC Volts	Terminal Screw	[A] Length in (mm)	[B] Mounting Centers in (mm)
2402	2	20A	300V	M3.5 (#6)	1.43 (36.20)	1.13 (28.70)
2404	4	20A	300V	M3.5 (#6)	2.17 (55.00)	1.87 (47.60)
2406	6	20A	300V	M3.5 (#6)	2.91 (74.00)	2.62 (66.60)
2408	8	20A	300V	M3.5 (#6)	3.66 (93.00)	3.37 (85.60)
2410	10	20A	300V	M3.5 (#6)	4.41 (112.00)	4.12 (104.60)
2502	2	30A	600V	M4 (#8)	2.13 (54.00)	1.69 (42.80)
2504	4	30A	600V	M4 (#8)	3.25 (82.60)	2.81 (71.40)
2506	6	30A	600V	M4 (#8)	4.38 (111.20)	3.94 (100.00)
2508	8	30A	600V	M4 (#8)	5.50 (139.70)	5.06 (128.50)
2510	10	30A	600V	M4 (#8)	6.63 (168.30)	6.18 (157.10)
2512	12	30A	600V	M4 (#8)	7.75 (196.80)	7.31 (185.60)
2602	2	65A	600V	M5 (#10)	2.51 (63.80)	2.06 (52.40)
2604	4	65A	600V	M5 (#10)	3.89 (98.70)	3.44 (87.30)
2606	6	65A	600V	M5 (#10)	5.26 (133.60)	4.81 (122.20)
2608	8	65A	600V	M5 (#10)	6.63(168.50)	6.19 (157.10)
2610	10	65A	600V	M5 (#10)	8.01 (203.40)	7.56 (192.00)

# **Terminal Block Jumpers**

Combines independent circuits on Terminal Blocks and ST-Blade Fuse Blocks 5035 and 5037

Bus Material	Nickel-Plated Brass
Continuous Amperage	Equivalent to matching block

Part #	Description	Retail Pack
9218	For use with 20A Terminal Blocks	5
9217	For use with 30A Terminal Blocks and ST-Blade Fuse Blocks 5035 & 5037	5
9216	For use with 65A Terminal Blocks	5



**Related Product** 



ST-Blade Fuse Blocks page 64

# **TECH TIP**

### **Connector & Insulators Explained**

**Tin-plated copper buses** provide maximum conductivity and corrosion resistance.

**Insert-molded stainless steel studs** eliminate the need for securing nuts and allow high torquing for excellent electrical contact.

**UL 94-V0 rated** UL 94-V0 rated base materials have flame retardants and will self extinguish if a flame source is removed.

**Terminal Screws** incorporate stainless steel split ring lock washers and captive star-type lock washers keep connections tight in high vibration environments

**One-Piece Serrated Flange Nuts** ensure correct and secure connections which do not cause resistance.

Insulating covers meet ABYC and USCG insulation requirements.


#### **PowerBar - 600A Common BusBars**


High amperage BusBar with 3/8" terminal studs

Continuous Rating	545A AC / 600A DC
Voltage Max. Operating	300V AC / 48V DC
Mounting Hardware	#10 (M5) Screws
Bus Material	Tin-Plated Copper C11000
Regulatory	CE & UKCA certified

Part #	Terminal Studs	Terminal Screws	[A] Length in (mm)	[B] Mounting Centers in (mm)
2104	4 × 3 / 8" -16	4 x #8-32	7.0 (177.8)	6.25 (158.74)
2107	8 × 3 / 8" -16	4 x #8-32	11.375 (288.93)	10.375 (263.53)
2708	Cover For 2104			











#### **Related Products**



MaxiBus Cover 2718 page 102

#### PowerBar 1000 - 1000A Common BusBars

Provides a single point to consolidate large and small conductors

- For large complex wiring systems
- Tin-plated pure electrical copper for maximum conductivity
- Stepped bus design offers two elevations for conductors which doubles the density of the wire loom compared to traditional bus bars
- Busbar and fuse block elevations match common fuse blocks allowing for multiple fuse block attachment, eliminating the need for connecting cables
- One-piece serrated flange nuts ensure correct and secure connections
- Stainless steel 8-32 screws with captive lock washers for securing smaller gauge wires
- Busbar may be cut to a shorter length to accommodate constricted spaces
- Bi-directional busbar end caps allow the ganging of additional busbars
- Snap on insulating cover meets ABYC and USCG requirements and includes label recess
- Models available to accommodate either 3/8" or 5/16" terminals

Continuous Rating	1000A
Voltage Max. Operating	150V AC / 48V DC
Mounting Hardware	#10 (M5) Screws
Bus Material	Tin-Plated Copper C11000

Part #	Cover	Terminal Studs	Terminal Screws
1990	Yes	8 × 3/8"-16	5 x #10-32, 11 x #8-32
1991	Yes	12 × 3/8"-16	5 x #10-32, 11 x #8-32
1992	Yes	8 × 5/16"-18	5 x #10-32, 11 x #8-32
1993	Yes	12 × 5/16"-18	5 x #10-32, 11 x #8-32
2730B	PowerBar 1990 & 1992 Cover		
2731B	PowerBar 1991 & 1993 Cover		



**Related Products** 



Terminal (MRBF) Fuse Block page 68



ANL Fuse Block page 69



Safety AMI/MIDI Fuse Block page 70

# **TECH TIP**


#### **PowerBar 1000 Explained**

The PowerBar 1000 offers mounting and application flexibility. Coupled with security features like serrated flange nuts and an insulating cover, the PowerBar 1000 is an organized and secure termination point for the boat or vehicle's critical electrical connections.

PowerBar 1000 used as a grounding bus and high density collecting point for both large and small gauge conductors.



PowerBar 1000 used as a high amperage positive distribution bus for various types and sizes of fuses as well as high density collecting point for both large and small gauge conductors. Typically this configuration would include the snap on insulating cover but pictured without to better show fuse blocks.

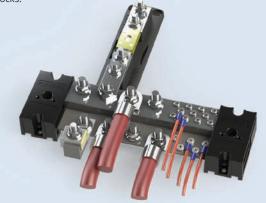

PowerBar 1000 used as a positive distribution bus and high density collecting point for both large and small gauge conductors. Pictured with snap on insulating cover.



#### Gang two or more PowerBars together



# **Battery Terminal Mount BusBars**

Easily add positive and negative busbars to a threaded-post battery terminal


- Tin-plated pure electrical copper for maximum conductivity
- Insulating covers meet ABYC/USCG insulation requirements
- · Screw terminals for securing wires
- 2340 Includes four 16-14 AWG and four 12-10 AWG Nylon Insulated ring terminals

Continuous Rating	100A DC
	32V DC
Voltage Max. Operating	32V DC
Bus Material	Tin-Plated Copper C11000
Mounting Thru-hole	Clearance for 3/8" (M10) stud
Screw Terminal	#8-32 Screws with Captive Star Lock washer

Part #	Description
2340	Positive + Negative
2341B	Positive
2342B	Negative





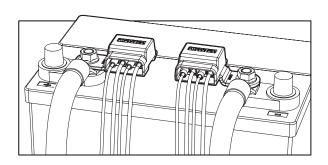

#### **Related Products**



ST-Blade Battery Terminal Mount Fuse Block Kit page 63

### **PowerPost Cable Connectors**


Insulated single stainless steel stud terminates multiple large conductors




 One-piece serrated flange nuts ensure correct and secure connections

Continuous Rating	Not rated - stacked on post and is determined by wire and terminals used.
Voltage Max. Operating	48V DC
Mounting Hardware	#8 Screws (2010, 2011) 1/4" Screws (2001, 2002, 2003)
Regulatory	CE & UKCA certified

Part #	Terminal Stud
2010	#10-32 × 5/8"
2011	1/4"-20 × 3/4"
2001	1/4"-20 × 1-1/16"
2002	5/16"-18 × 7/8"
2003	3/8"-16 × 7/8"





# **PowerPost Plus Cable Connectors**

Enables connection of multiple smaller wires in spaces where a traditional bus bar may not fit



- Allows small wire connections at high amperage cable connections
- One-piece serrated flange nut ensures correct and secure connections

Continuous Rating	150A DC
Voltage Max. Operating	48V DC
Mounting Hardware	1/4" Screws
Bus Material	Tin-Plated Copper
Regulatory	CE & UKCA certified

Part #	Terminal Stud	Terminal Screws
2101	1/4"-20 × 1"	8 × #8-32
2102	5/16"-18 × 3/4"	8 × #8-32
2103	3/8"-16 × 3/4"	8 × #8-32

#### **Dual PowerPost Cable Connectors**


Provides a termination point for extending the length of outboard harnesses or other conductors

- Designed for connecting high amperage conductors
- 2018 is also designed for outboard engine installation when factory cables need to be extended
- One-piece serrated flange nuts ensure correct and secure connections

Continuous Rating	Not rated - amperage flows between terminals stacked on post and is determined by wire and terminals used.			
Voltage Max. Operating	48V DC			
Mounting Hardware	#10 (M5) Screws			
Regulatory	CE & UKCA certified			



Part #	Terminal Studs	Insulating Cover	Stud Height A in (mm)	Stud Height B in (mm)
2016	2 × 5/16"-18	Yes	1.50 (38.1)	1.50 (38.1)
2017	2 × 3/8"-16	Yes	1.63 (41.3)	1.63 (41.3)
2017100B	2 × 3/8"-16		1.63 (41.3)	1.63 (41.3)
2018	1 × 5/16"-18, 1 × 3/8"-16	Yes	1.50 (38.1)	1.63 (41.3)




# **Terminal Feed Through Connectors**

Eliminates chafe and provides strain relief when passing high current through hulls, decks and bulkheads

- Protects large cables that are subject to chafing when passed through holes
- The large terminals have a mounting face that can be gasketed or bedded to provide a water-tight installation
- One-piece serrated flange nut ensures correct and secure connections

Stud Material	Tin-Plated Copper Alloy
Mounting Hardware	#10 (M5) Screws
Regulatory	Rated IP66 - protected against powerful water jets


				-
Part#	Terminal Stud	Amps	Volts	Color
2201	5/16"-18	250A	48V	Black
2202	5/16"-18	250A	48V	Red
2203	3/8"-16	250A	48V	Black
2204	3/8"-16	250A	48V	Red

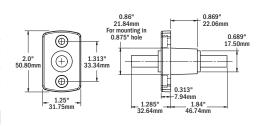







# **Connector Comparison**

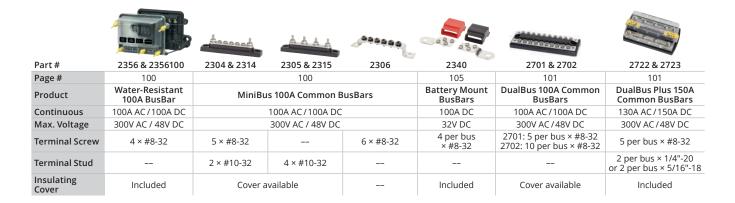

	Annan	Assessans	4444	A manage	Annonnati	YYYY	TYTYTY
Part #	2300 & 2301	2312 & 2302	2307 & 2303	2128	2105	2127	2126
Page #	101			102			
Product	150A Common BusBars			MaxiBus 250A Common BusBars			
Continuous	130A AC / 150A DC			250A AC / 250A DC			
Max. Voltage	300V AC / 48V DC			300V AC / 48V DC			
Terminal Screw	10 × #8-32	20 × #8-32		6 × #10-24	12 × #10-24		
Terminal Stud	2 × 1/4"-20 4 × 1/4"-20		2 × 5/16" -18	2 × 5/16" -18	4 × 5/16" -18	6 × 5/16" -18	
Insulating Cover	Cover available				Cover	available	

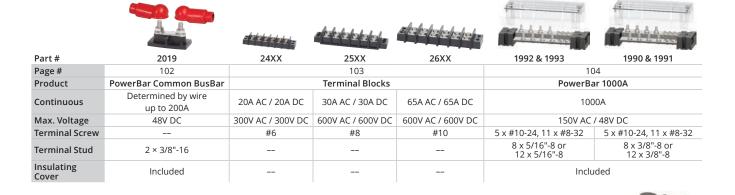

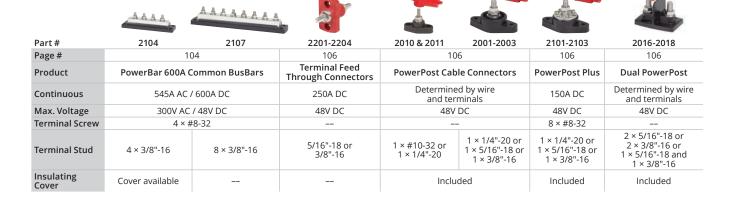


# **Stud Mount Insulating Boots**

Insulates conductive posts and studs

- Press-fit design for all 5/16" (M8) and 3/8" (M10) posts and studs
- Ideal for ML-Series Remote Battery Switches, Solenoids & Automatic Charging Relays, battery terminals, power posts, bus bars, battery switches, and much more.
- For use with insulated ring terminals and lugs only





Part #	Cable Size (AWG)	Color	Package
4000	All	Red	Retail/2

# **Rotating CableCap Insulators**

Insulates battery terminals which have integral wing nut posts

• Top rotates 360 degrees to allow cable entry from any angle



Part #	Cable Size (AWG)	Color	Package
4001	All	Red/Black	Pair/Retail
9030B	All	Black	Bulk/Not for retail
9031B	All	Red	Bulk/Not for retail

# **Standard CableCap Insulators**

Insulates battery terminals which have added adapter terminals



Part #	Cable Size (AWG)	Color	Package
4005	4, 2, 1	Red/Black	Pair/Retail
4006	1/0, 2/0	Red/Black	Pair/Retail
9038B	4, 2, 1	Black	Bulk/Not for retail
9039B	4, 2, 1	Red	Bulk/Not for retail
9040B	1/0, 2/0	Black	Bulk/Not for retail
9041B	1/0, 2/0	Red	Bulk/Not for retail

# **Automotive CableCap Insulators**

Insulates battery terminals which have standard automotive posts



Part#	Cable Size (AWG)	Color	Package
4016	4, 2, 1	Red/Black	Pair/Retail
4017	1/0, 2/0	Red/Black	Pair/Retail
9176B	1/0, 2/0	Red	Bulk/Not for retail
9177B	1/0, 2/0	Black	Bulk/Not for retail

# **Square CableCap Insulators**

Insulates battery terminals which have in-line dual posts



Part #	Cable Size (AWG)	Color	Package
4018	1/0	Red/Black	Pair/Retail
4019B	1/0	Red	Bulk/Not for retail
4020B	1/0	Black	Bulk/Not for retail

# **Stud CableCap Insulators**

Insulates single stud on alternators, starters, windlasses and high amperage termination points



Part #	Cable Size (AWG)	Color	Package
4008	18-10	Red	Retail/3
4009	18-10	Black	Retail/3
4010	8-4	Red	Retail/2
4011	8-4	Black	Retail/2
4012	2-2/0	Red	Retail/1
4013	2-2/0	Black	Retail/1
4014	3/0-4/0	Red	Retail/1
4015	3/0-4/0	Black	Retail/1

#### **PowerPost Insulator**

Insulates single studs and large cables

• Included with 2001, 2002, 2003, 2101, 2102, 2103, and 2019



Part #	Cable Size (AWG)	Color	Package
4004	up to 2/0	Red	Retail

# **Dual Entry PowerPost Cable Insulators**

Protects against accidental short circuits

• For use with Dual PowerPost Cable Connectors (p. 106)




Part #	Cable Size (AWG)	Cable Entry Size in (mm)	Color	Package
4002	up to 2/0	0.7 (17.8)	Black	Retail/1
4003	up to 2/0	0.7 (17.8)	Red	Retail/1


#### **CableClams**

Provides a waterproof pass-through for antenna cables without requiring removal of the factory installed connector











- Save the expense of removing and replacing connectors
- Avoid poor connections from removing factory connectors
- Use 1001, 1001100 for GPS cables, 1002, 1002100 for VHF cables, 1003, 1003100 for Radar cables
- 1001100, 1002100, 1003100 includes pre-drilled and slit rubber seals for easier installation
- 1001100, 1002100, 1003100 includes a 316 stainless steel dress cap which conceals mounting hardware and matches other deck hardware
- · Stainless steel fasteners included


Ring Material	UV-Stabilized Thermoplastic
Seal Material	UV-Stabilized Buna-N Rubber

Part#	Seals Included	Max. Connector Diameter in (mm)	Max. Cable Diameter in (mm)	Stainless Steel Cap	Mounting Holes Accept
1001		0.68 (17.0)	0.31 (8.0)		#6 x 7/8" screws
1001100	3	0.68 (17.0)	0.31 (8.0)	Yes	#6 x 7/8" screws
1002		0.83 (21.0)	0.44 (11.0)		#8 x 7/8" screws
1002100	3	0.83 (21.0)	0.44 (11.0)	Yes	#8 x 7/8" screws
1003		1.40 (35.0)	0.56 (14.0)		#8 x 7/8" screws
1003100	1	1.40 (35.0)	0.56 (14.0)	Yes	#8 x 7/8" screws





1002 / 1002100




1003 / 1003100


# Side-Entry CableClams with Stainless Steel Dress Cap

Provides a water-resistant side-entry for cables without requiring removal of the factory installed connector



1007100






- Simple one-piece design for easy side-entry installations
- Low profile, contoured edge reduces the risk of tangling lines
- 1007100 includes a 316 stainless steel dress cap which conceals mounting hardware and matches other deck hardware
- Stainless steel fasteners included

Ring Material	UV-Stabilized Thermoplastic
Seal Material	UV-Stabilized Buna-N Rubber

Part#	Max. Connector Diameter in (mm)	Max. Cable Diameter in (mm)	Stainless Steel Cap	Mounting Holes Accept
1007	1.00 (25.40)	0.28 (7.112)		#8 x 7/8" screws
1007100	1.00 (25.40)	0.28 (7.112)	Yes	#8 x 7/8" screws





# POWER <u>DISTRIBUTION</u>

Circuit Breaker Switch Water-Resistant Contura Switch Water-Resistant WeatherDeck® Waterproof 360 Panel System Traditional Metal



113

Designed for exposed mounting applications.



114

Complements existing controls commonly used on many boats.



115

Designed for open-cockpit and flybridge applications.




116

Designed with an open frame to mount a broad selection of modules allowing multiple functions to be combined in a single panel.



117

Suited for use as drop-in replacements or extensions to existing panels.

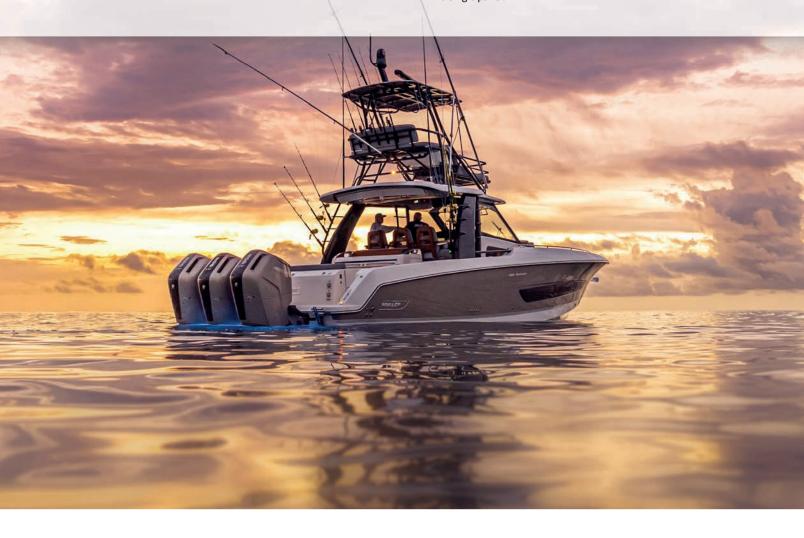

# **POWER DISTRIBUTION**

DC and AC Circuit Breaker AC RCBO Circuit Breaker AC Source Selection **AC/DC Combination** 

Custom 360



118

Designed to distribute current from a high amperage input into lower amperage circuits.



126

Reduces the risk of fire and shock hazards caused by defects in boat appliances and circuit wiring.



127

Select between multiple AC sources to supply power to the AC Branch distribution system.




130

Combines switching, circuit protection, source selection and monitoring into a single panel.



131

Design and order custom panels online.

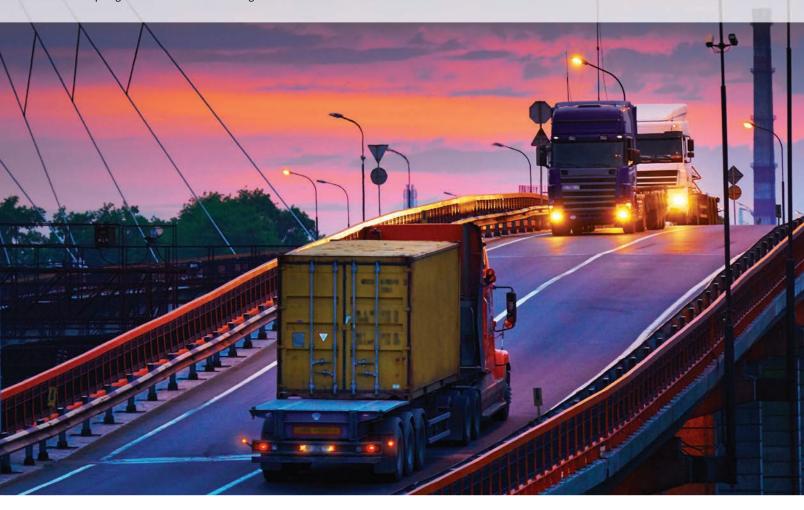

The power distribution panel is the heart of an electrical system.

Blue Sea Systems manufactures panels suited for all size and distribution requirements of a vessel or vehicle.

# Waterproof & Water-Resistant Panels

Integrated overcurrent protection and switching built to withstand harsh environments for every application

#### **Water-Resistant Circuit Breaker Switch Panels**

Designed for Wet Environments - IP45/IP66 (See inside back cover)

Water-Resistant Circuit Breaker Switch Panels utilize 15A illuminated circuit breakers that provide on indication and switching in one. Integrated switch boot and panel gasket provide IP45/IP66 water resistance for wet environments. Available in gray and camo pattern.







#### **Contura Switch Water-Resistant Panels**

Contemporary Design For Wet Environments - IP66 (See inside back cover) Using industry standard Contura switches, the Blue Sea Systems Contura Switch Water Resistant Panels are designed to perform above deck, as well as complement any interior. Fuse models are available in a classic gray finish, and circuit breaker models are available in white or black.





#### WeatherDeck® Waterproof Panels

Designed For Extreme Environments - IP67 (See inside back cover)

The WeatherDeck Panels are Blue Sea Systems most waterproof panels and their contemporary appearance adds style to any boat. Available in switch only, fuse, and circuit breaker models, the WeatherDeck Panels can be mounted in four orientations for maximum versatility.







bluesea.com POWER DISTRIBUTION 113

# **Water-Resistant Circuit Breaker Switch Panels**

#### Designed for exposed mounting applications

- Illuminated 15A circuit breakers provide switching, ON indication and overcurrent protection (7069)
- Industry-standard sizes and mounting allow these panels to be easily retrofitted in an existing application
- Polycarbonate/ABS panel surface is UV-stabilized, flame retardant, and will not corrode
- Silicon breaker boots (4134) and gasket protects against water ingress
- Low profile makes it easy to install in tight spaces
- Fast-on circuit breaker connectors make it quick to wire
- Two-wire connection for powering all panels is simple and requires #10 ring terminals. Terminals screw to bus bars for secure connections
- 4321& 4324 include a 12/24V, 2.1A DC Dual USB Charger and 12V Socket (p. 24, 25)
- Set of 15 square format circuit labels are included, and are easy to replace. Additional standard or custom labels are available through Blue Sea Systems

Nominal Voltage	12V DC
Amperage Max. Operating	45A
Terminal Type	1/4" Male quick connect
Hardware	Stainless Steel #6 x 5/8" mounting screws
Ring Terminal Size	M5 (#10)
Regulatory	Panel front is IP45 (4321 & 4324 only) or IP66 when mounted with gasket in place - protected against water jets or powerful water jets (see inside back cover)

Part#	Description	Color	Width in (mm)	Height in (mm)	Depth in (mm)	Width Mounting Centers in (mm)	Height Mounting Centers in (mm)
4320	4 positions	Gray	4.625 (117.47)	5.0 (127)	1.75 (44.45)	4.125 (104.77)	4.437 (112.69)
4321	4 pos. + 12V Socket & Dual USB Charger	Gray	4.625 (117.47)	6.625 (168.27)	1.75 (44.45)	4.125 (104.77)	6.125 (155.57)
4322	6 positions	Gray	4.625 (117.47)	6.625 (168.27)	1.75 (44.45)	4.125 (104.77)	6.125 (155.57)
4323	4 positions	Camo	4.625 (117.47)	5.0 (127)	1.75 (44.45)	4.125 (104.77)	4.437 (112.69)
4324	4 pos. + 12V Socket & Dual USB Charger	Camo	4.625 (117.47)	6.625 (168.27)	1.75 (44.45)	4.125 (104.77)	6.125 (155.57)
4325	6 positions	Camo	4.625 (117.47)	6.625 (168.27)	1.75 (44.45)	4.125 (104.77)	6.125 (155.57)

# **Contura Switch Water-Resistant Bilge Panels**

Consolidated control and circuit protection for up to four bilge pumps

- · Designed for 12V or 24V DC systems
- · Watertight mounting gasket
- Pre-wired for easy installation
- ON indicating LEDs embedded in all switches
- (ON)-OFF-ON Contura Switches and 15A AGC Fuses

NOTE: Labels are not backlit

Voltage Max. Operating	24V DC
Amperage Operating Current	18 Milliamps per illuminated LED
Switch Rating	20A @ 12V DC, 15A @ 24V DC
Circuit Breaker Rating	15A
Fuse Holder Rating	20A Max. (15A fuses included)
Panel Cumulative Rating	45A
Regulatory	Panel front is IP66 when mounted with gasket in place - protected against powerful water iets (see inside back cover)

Part#	Color	Contura Switches	AGC®/MDL® Fuse Holders	Width in (mm)	Height in (mm)	Depth in (mm)
8263	Gray	1	1	2.25 (57.15)	3.75 (95.25)	3.00 (76.20)
8664	Gray	2	2	3.34 (84.84)	3.75 (95.25)	3.00 (76.20)
8665	Gray	3	3	5.25 (133.35)	3.75 (95.25)	3.00 (76.20)
8666	Gray	4	4	5.25 (133.35)	3.75 (95.25)	3.00 (76.20)



**4320** Gray



**4323** Camo



**4321** Gray



**4324** 



**4322** Gray



**4325** Camo



8263



8664



8665



8666

# **Contura Switch Water-Resistant Panels**

Designed for open-cockpit and flybridge applications using switches to complement existing controls commonly used

- Designed for 12V or 24V DC systems
- · Watertight mounting gasket

114

- ON indicating LEDs embedded in all switches
- Includes Small Format Label Set 8217 (Gray) or 8214 (Black) \* (p. 154)
- 8121, 8421 & 8521 include a 12/24V DC 4.8A USB Charger (p. 24)

NOTE: Labels are not backlit

Voltage Max. Operating	24V DC
Amperage Operating Current	18 Milliamps per illuminated LED
Switch Rating	20A @ 12V DC, 15A @ 24V DC
Circuit Breaker Rating	15A
Fuse Holder Rating	20A Max. (15A fuses included)
Panel Cumulative Rating	45A (all except 8 position panels) 90A (8 position panels)
Regulatory	CE marked, Panel front is IP66 when mounted with gasket in place - protected against powerful water jets (see inside back cover) CIRCUIT BREAKER MODELS ONLY—Meet UL 1500 and ISO 8846 external ignition protection requirements





8374



8372





8521



8373



8272







8271







8273



8261



8121



8053

Part#	Color	4.8A Dual USB Charger	Push Button Circuit Breakers	AGC®/MDL® Fuse Holders	Width in (mm)	Height in (mm)	Depth in (mm)
8274	White		3		4.50 (114.30)	3.75 (95.25)	3.25 (82.55)
8272	White		4		5.25 (133.35)	4.25 (107.95)	3.25 (82.55)
8273	White		6		4.50 (114.30)	7.50 (190.50)	3.25 (82.55)
8271	White		8		9.37 (238.00)	4.25 (107.95)	3.25 (82.55)
8421	White	1	5		4.50 (114.30)	7.50 (190.50)	3.25 (82.55)
8374	Black		3		4.50 (114.30)	3.75 (95.25)	3.25 (82.55)
8372	Black		4		5.25 (133.35)	4.25 (107.95)	3.25 (82.55)
8373	Black		6		4.50 (114.30)	7.50 (190.50)	3.25 (82.55)
8371	Black		8		9.37 (238.00)	4.25 (107.95)	3.25 (82.55)
8521	Black	1	5		4.50 (114.30)	7.50 (190.50)	3.25 (82.55)
8054*	Gray			3	5.25 (133.35)	3.75 (95.25)	3.00 (76.20)
8262	Gray			4	5.25 (133.35)	3.75 (95.25)	3.00 (76.20)
8053*	Gray			6	5.25 (133.35)	7.50 (190.50)	3.00 (76.20)
8261	Gray			8	9.37 (238.00)	3.75 (95.25)	3.00 (76.20)
8121*	Gray	1		5	5.25 (133.35)	7.50 (190.50)	3.00 (76.20)






8262

<sup>\* 8054, 8053</sup> and 8121 include Large Format Label Set 8030 (p. 154)

# **WeatherDeck® Waterproof Panels**

Designed for open-cockpit and flybridge applications

- Fuse Model: Bicolored LEDs illuminate circuit labels to quickly identify OFF (Red), ON (Green), or Blown (No color) circuits
- Circuit Breaker Model: Green LEDs illuminate circuit labels
- Fuse and Circuit Breaker Models:
  - Backlighting is compatible with DeckHand Dimmers (p. 27)
  - Independent label backlighting allows switching and dimming
- Switch Only Model: No circuit protection or illuminated circuit labels
- · Integrated switch guards reduce the risk of accidental switching
- · Panels can be mounted in four different orientations
- Panel front rated IP67 when properly mounted with watertight mounting gasket
- · UV stabilized weather-resistant faceplate snaps on and off providing access to components and concealing mounting screws
- Square Format Label Set 4215 included (p. 154)

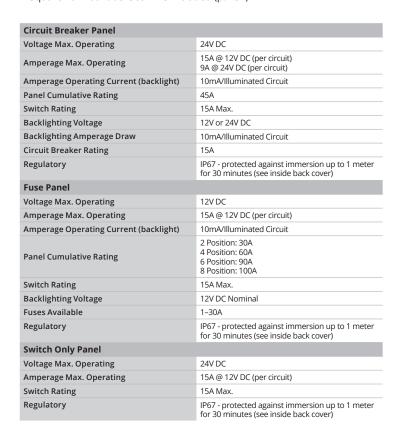



4374 CLB Circuit breakers



4376 CLB Circuit breakers



4378 CLB Circuit breakers



4302 ATO/ATC Fuses



4304 ATO/ATC Fuses 4305 Switch only




4306 ATO/ATC Fuses 4307 Switch only



4308 ATO/ATC Fuses 4309 Switch only

Part#	Pos.	Circuit Breakers	Fuses	Label Backlight	Volts	Width in (mm)	Height in (mm)	Depth in (mm)	Width Mounting Centers in (mm)	Height Mounting Centers in (mm)
4374	4	Yes		Yes	12/24V	4.25 (107.95)	4.30 (109.22)	3.50 (88.90)	3.69 (93.73)	3.74 (95.00)
4376	6	Yes		Yes	12/24V	4.25 (107.95)	6.00 (152.40)	3.50 (88.90)	3.69 (93.73)	5.44 (138.18)
4378	8	Yes		Yes	12/24V	4.25 (107.95)	7.70 (195.58)	3.50 (88.90)	3.69 (93.73)	7.14 (181.36)
4302	2		Yes	Yes	12V	3.88 (98.55)	2.60 (66.04)	2.50 (63.50)	3.31 (84.07)	2.04 (51.82)
4304	4	-	Yes	Yes	12V	3.88 (98.55)	4.30 (109.22)	2.50 (63.50)	3.31 (84.07)	3.74 (95.00)
4306	6		Yes	Yes	12V	3.88 (98.55)	6.00 (152.40)	2.50 (63.50)	3.31 (84.07)	5.44 (138.18)
4308	8		Yes	Yes	12V	3.88 (98.55)	7.70 (195.58)	2.50 (63.50)	3.31 (84.07)	7.14 (181.36)
4303	2				12/24V	3.88 (98.55)	2.60 (66.04)	2.50 (63.50)	3.31 (84.07)	2.04 (51.82)
4305	4				12/24V	3.88 (98.55)	4.30 (109.22)	2.50 (63.50)	3.31 (84.07)	3.74 (95.00)
4307	6				12/24V	3.88 (98.55)	6.00 (152.40)	2.50 (63.50)	3.31 (84.07)	5.44 (138.18)
4309	8				12/24V	3.88 (98.55)	7.70 (195.58)	2.50 (63.50)	3.31 (84.07)	7.14 (181.36)

# **360 Panel System**

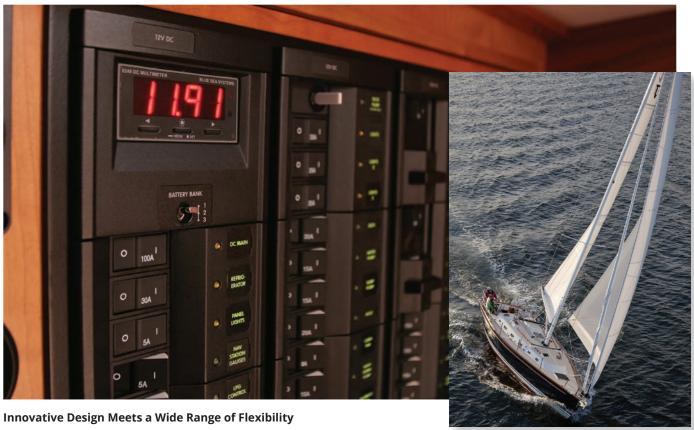

The 360 Panel System uses an open frame to mount a broad selection of modules allowing multiple functions to be combined in a single panel. This innovative design offers a wide choice of panel features, accommodates future changes, and permits rapid assembly and shipping time. With options ranging from battery management to source selection, the 360 Panel System provides unmatched design flexibility. If you do not find the panel you are looking for in the stock panel offering, please go to page 132 to find out how to create and order a custom panel that will work for your specific application.



Open frame allows future replacement or upgrade of panel modules

#### **Related Products**



Push Button Circuit Breaker Boot page 75



Push Button Reset-Only Circuit Breaker page 75



A-Series Rocker Circuit Breakers page 83




ELCI Main Circuit Breakers page 87



Analog Meters page 140



Digital Meters page 146



Tartan Yachts uses Blue Sea Systems 360 Panels aboard their boats

360 Panel Insulating Back Cover page 152



Square Format Labels page 154

bluesea.com POWER DISTRIBUTION 117

# **Traditional Metal Panels**




#### **Styled to Match Existing Panels**

The Traditional Metal Panels are suited for use as extensions to existing panels or as full replacements. All panels are pre-wired and include LEDs in all positions. Choose from over 100 stock panels ranging from simple circuit breaker models to complex multi-source AC configurations.



Blue Sea Systems' Traditional Metal Panels are a complementary fit on the Blackfin 34 Fisharound





Marine grade aluminum frame securely holds fixed panel components and is chemically treated to resist corrosion (aluminum frame not sold separately)

#### **Related Products**



A-Series Toggle Circuit Breakers page 82



C-Series Toggle Circuit Breaker page 84



ELCI Main Circuit Breakers page 87



Analog Meters page 140



Digital Meters page 146



LED Indicator Lights page 153



Insulating Back Cover page 152



Large Format Labels page 154

# **DC Branch Circuit Breaker Panels**

#### Distribute current from a high amperage input into lower amperage circuits


#### **Features**

118

- ON-indicating LEDs for select models\*
- Backlit label positions for select models\*
- Panels with voltmeters include a toggle switch to monitor voltage on up to three battery banks

#### **Component References**

- A-Series Circuit Breakers (p. 82)
- Push Button Reset-Only Circuit Breakers (p. 75)
- ON-OFF, SPST Rocker Switches (p. 94)
- 360 Panels include 4205 label set (p. 155)
- Traditional Metal Panels include 8030 label set (p. 155) 4.8A USB Charger & 12V Socket (p. 24, 25)
- DC Digital Multimeter (p. 146)
- DC Analog Meters (p. 140)
- Amber ON-indicating LEDs (p. 153)
- DC M2 Multimeter 1830 (p. 143)













Part #	8025	1216	1455	1495	1459
Style	Traditional Metal	360 Panel System	360 Panel System	360 Panel System	360 Panel System
Total Positions	3 Positions	4 Positions	4 Positions	4 Positions	4 Positions
Circuit Breakers	3 A-Series, 15A (7210)	4 A-Series, 15A (7403)	4 Push Button, 10A (7054)	4 A-Series, 15A (7403)	4 Push Button, 10A (7054)
Rocker Switches			4 ON-OFF, SPST (7480)		4 ON-OFF, SPST (7480)
Dual USB / Dash Socket				12/24V Dual USB 4.8A (1045) 12V Dash Socket (1011)	
Nominal Voltage	12/24V DC	12V DC	12V DC	12V DC	12V DC
Maximum Amperage	100A	100A	40A	100A	40A
DC Meter					8-16V (8003)
Width x Height in (mm)	5.25 (133.35) x 4.75 (120.65)	4.88 (123.83) x 4.75 (120.65)	4.88 (123.83) x 4.75 (120.65)	4.88(123.83) x 7.75(196.85)	4.88 (123.83) x 7.75 (196.85)
Depth in (mm)	2.50 (63.50)	3.00 (76.20)	3.50 (88.90)	3.50 (88.90)	3.50 (88.90)











Part #	8120	8081	8401	8096	1450
Style	Traditional Metal	Traditional Metal	Traditional Metal	Traditional Metal	360 Panel System
<b>Total Positions</b>	5 Positions	5 Positions	5 Positions	6 Positions	8 Positions
Circuit Breakers	5 A-Series, 15A (7210)	5 A-Series, 15A (7210)	5 A-Series, 15A (7210)	6 A-Series, 15A (7210)	8 Push Button, 15A (7056)
Nominal Voltage	12V DC	12V DC	12/24V DC	12/24V DC	12/24V DC
Maximum Amperage	50A	50A	100A	100A per bus	90A
DC Meter		8-16V (8028), 0-50A (8041)	Digital Multimeter (8248)		
Dual USB / Dash Socket	12/24V Dual USB 4.8 (1045) 12V Dash Socket (1011)	_			
Width x Height in (mm)	5.25 (133.35) x 7.50 (190.50)	5.25 (133.35) x 7.50 (190.50)	5.25 (133.35) x 7.50 (190.50)	10.50 (266.70) x 3.75 (95.25)	4.88 (123.83) x 4.75 (120.65)
Depth in (mm)	2.50 (63.50)	2.50 (63.50)	4.00 (101.6)	2.50 (63.50)	3.50 (88.90)









Part #	1498	1457	1456	1497
Style	360 Panel System	360 Panel System	360 Panel System	360 Panel System
Total Positions	8 Positions	8 Positions	8 Positions	8 Positions
Circuit Breakers	8 Push Button, 15A (7056)	8 Push Button, 10A (7054)	8 Push Button, 10A (7054)	8 A-Series, 15A (7403)
Rocker Switches		8 ON-OFF, SPST (7480)	8 ON-OFF, SPST (7480)	
Dual USB / Dash Socket	12/24V Dual USB 4.8A (1045) 12V Dash Socket (1011)			12/24V Dual USB 4.8A (1045) 12V Dash Socket (1011)
Nominal Voltage	12V DC	12V DC	12V DC	12V DC
Maximum Amperage	90A	80A	80A	100A
DC Meter				M2 Multimeter w/SOC (1830)
Width x Height in (mm)	4.88(123.83) x 7.75(196.85)	4.88 (123.83) x 7.75 (196.85)	9.25 (234.95) x 4.75 (120.65)	9.25 (234.95) x 7.75 (196.85)
Depth in (mm)	3.50 (88.90)	3.50 (88.90)	3.50 (88.90)	4.00 (101.60)











Part #	1200	1225	8023	8385	1463
Style	360 Panel System	360 Panel System	Traditional Metal	Traditional Metal	360 Panel System
Total Positions	8 Positions	8 Positions	8 Positions	8 Positions	8 Positions
Circuit Breakers	8 A-Series, 15A (7403)	8 A-Series, 15A (7403)	5 A-Series, 15A (7210)	6 A-Series, 15A (7210)	8 Push Button, 10A (7054)
Rocker Switches					8 ON-OFF, SPST (7480)
Nominal Voltage	12V DC	12V DC	12/24V DC	12/24V DC	12V DC
Maximum Amperage	100A	100A per bus	100A	100A per bus	80A
Meter (PN)					8-16V (8003)
Width x Height in (mm)	4.88 (123.83) x 7.75 (196.85)	9.25 (234.95) x 4.75 (120.65)	5.25 (133.35) x 7.50 (190.50)	10.50 (266.70) x 4.50 (114.30)	4.88 (123.83) x 10.75 (273.05)
Depth in (mm)	3.00 (76.20)	3.00 (76.20)	2.50 (63.50)	2.50 (63.50)	3.50 (88.90)











Part #	1227	8082	8402	1461	1464
Style	360 Panel System	Traditional Metal	Traditional Metal	360 Panel System	360 Panel System
Total Positions	8 Positions	10 Positions	10 Positions	12 Positions	12 Positions
Circuit Breakers	8 A-Series, 15A (7403)	7 A-Series, 15A (7210)	7 A-Series, 15A (7210)	12 Push Button, 10A (7054)	12 Push Button, 10A (7054)
Rocker Switches				12 ON-OFF, SPST (7480)	12 ON-OFF, SPST (7480)
Nominal Voltage	12V DC	12V DC	12/24V DC	12V DC	12V DC
Maximum Amperage	100A	50A	100A	120A	120A
Meter	Digital Multimeter (8248)	8-16V (8028) / 0-50A (8041)	Digital Multimeter (8248)		8-16V (8003)
Width X Height in (mm)	4.88 (123.83) x 10.75 (273.05)	5.25 (133.35) x 11.25 (285.75)	5.25 (133.35) x 11.25 (285.75)	4.88 (123.83) x 10.75 (273.05)	9.25 (234.95) x 7.75 (196.85)
Depth in (mm)	3.00 (76.20)	2.50 (63.50)	4.00 (101.6)	3.50 (88.90)	3.50 (88.90)









Part #	1223	1217	1496	8375
Style	360 Panel System	360 Panel System	360 Panel System	Traditional Metal
Total Positions	12 Positions	12 Positions	12 Positions	12 Positions
Circuit Breakers	12 A-Series, 15A (7403)	12 A-Series, 15A (7403)	12 A-Series, 15A (7403)	10 A-Series, 15A (7210)
Nominal Voltage	12V DC	12V DC	12/24V DC	12/24V DC
Maximum Amperage	100A	100A per bus	100A	100A per bus
DC Meter		Digital Multimeter (8248)	M2 Multimeter w/SOC (1830)	<del></del>
Width x Height in (mm)	4.88 (123.83) x 10.75 (273.05)	9.25 (234.95) x 7.75 (196.85)	9.25 (234.95) x 7.75 (196.85)	14.75 (374.65) x 4.50 (114.30)
Depth in (mm)	3.00 (76.20)	4.00 (101.60)	4.00 (101.60)	2.50 (63.50)

# DC Branch Circuit Breaker Panels (continued)

120







Part #	8376	8068	8403		
Style	Traditional Metal	Traditional Metal	Traditional Metal		
Total Positions	13 Positions	13 Positions	13 Positions		
Circuit Breakers	10 A-Series, 15A (7210)	10 A-Series, 15A (7210)	10 A-Series, 15A (7210)		
Nominal Voltage	12/24V DC	12V DC	12/24V DC		
Maximum Amperage	100A	50A	100A per bus		
DC Meter	<del></del>	8-16V (8028), 0-50A (8041)	Digital Multimeter (8248)		
Width x Height in (mm)	5.25 (133.35) x 11.25 (285.75)	10.50 (266.70) x 7.50 (190.50)	10.50 (266.70) x 7.50 (190.50)		
Depth in (mm)	2.50 (63.50)	3.00 (76.20)	4.00 (101.6)		







Part #	1222 8377		1201
Style	360 Panel System	Traditional Metal	360 Panel System
Total Positions	16 Positions	16 Positions	16 Positions
Circuit Breakers	16 A-Series, 15A (7403)	10 A-Series, 15A (7210)	16 A-Series, 15A (7403)
Nominal Voltage	12V DC	12/24V DC	12V DC
Maximum Amperage	100A per bus	100A per bus	50A
DC Meter		<del></del>	8-16V (8003) / 0-50A (8022)
Width in (mm)	9.25 (234.95)	10.50 (266.70)	13.63 (346.08)
Height in (mm)	7.75 (196.85)	7.50 (190.50)	7.75 (196.85)
Depth in (mm)	3.00 (76.20)	2.50 (63.50)	3.00 (76.20)







Part #	8378	1221	8379
Style	Traditional Metal	360 Panel System	Traditional Metal
Total Positions	18 Positions	Main + 19 Positions	Main + 20 Positions
Circuit Breakers	15 A-Series, 15A (7210)	1 C-Series, 100A (7549), 19 A-Series, 15A (7403)	1 C-Series, 100A (7250I), 14 A-Series, 15A (7210)
Nominal Voltage	12V DC	12V DC	12/24V DC
Maximum Amperage	100A	100A	100A
DC Meter	8-16V (8003) / 0-100A (8017)	Digital Multimeter (8248)	Digital Multimeter (8248)
Width in (mm)	14.75 (374.65)	13.63 (346.08)	14.75 (374.65)
Height in (mm)	7.50 (190.50)	7.75 (196.85)	7.50 (190.50)
Depth in (mm)	2.50 (63.50)	4.00 (101.60)	4.00 (101.6)





Style         Traditional Metal         Traditional Metal           Total Positions         Main + 22 Positions         24 Positions           Circuit Breakers         1 C-Series, 100A (72501), 16 A-Series, 15A (7210)         15 A-Series, 15A (7210)           Nominal Voltage         12V DC         12/24V DC           Maximum Amperage         100A         100A per bus           DC Meter         8-16V (8028) / 0-100A Micro            Width in (mm)         10.50 (266.70)         14.75 (374.65)           Height in (mm)         11.25 (285.75)         7.50 (190.50)           Depth in (mm)         3.00 (76.20)         2.50 (63.50)	Part #	8380	8264
Circuit Breakers         1 C-Series, 100A (72501), 16 A-Series, 15A (7210)         15 A-Series, 15A (7210)           Nominal Voltage         12V DC         12/24V DC           Maximum Amperage         100A         100A per bus           DC Meter         8-16V (8028) / 0-100A Micro            Width in (mm)         10.50 (266.70)         14.75 (374.65)           Height in (mm)         11.25 (285.75)         7.50 (190.50)	Style	Traditional Metal	Traditional Metal
Nominal Voltage         12V DC           Maximum Amperage         100A           DC Meter         8-16V (8028) / 0-100A Micro           Width in (mm)         10.50 (266.70)           Height in (mm)         11.25 (285.75)           7.50 (190.50)	Total Positions	Main + 22 Positions	24 Positions
Maximum Amperage         100A         100A per bus           DC Meter         8-16V (8028) / 0-100A Micro            Width in (mm)         10.50 (266.70)         14.75 (374.65)           Height in (mm)         11.25 (285.75)         7.50 (190.50)	Circuit Breakers	1 C-Series, 100A (7250I), 16 A-Series, 15A (7210)	15 A-Series, 15A (7210)
DC Meter         8-16V (8028) / 0-100A Micro            Width in (mm)         10.50 (266.70)         14.75 (374.65)           Height in (mm)         11.25 (285.75)         7.50 (190.50)	Nominal Voltage	12V DC	12/24V DC
Width in (mm)     10.50 (266.70)     14.75 (374.65)       Height in (mm)     11.25 (285.75)     7.50 (190.50)	Maximum Amperage	100A	100A per bus
Height in (mm) 11.25 (285.75) 7.50 (190.50)	DC Meter	8–16V (8028) / 0–100A Micro	
	Width in (mm)	10.50 (266.70)	14.75 (374.65)
<b>Depth in (mm)</b> 3.00 (76.20) 2.50 (63.50)	Height in (mm)	11.25 (285.75)	7.50 (190.50)
	Depth in (mm)	3.00 (76.20)	2.50 (63.50)





Part #	8381	8382
Style	Traditional Metal	Traditional Metal
Total Positions	Main + 32 Positions	Main + 35 Positions
Circuit Breakers	1 C-Series, 100A (7250I), 23 A-Series, 15A (7210)	1 C-Series, 100A (7250I), 26 A-Series, 15A (7210)
Nominal Voltage	12V DC	12/24V DC
Maximum Amperage	100A	100A
DC Meter	8-16V (8003) / 0-100A (8017)	Digital Multimeter (8248)
Width in (mm)	14.75 (374.65)	14.75 (374.65)
Height in (mm)	11.25 (285.75)	11.25 (285.75)
Depth in (mm)	3.00 (76.20)	4.00 (101.6)



# **AC Main Circuit Breaker Panels**

Provides a path for delivering power from the AC source to the AC branch distribution system

#### **Features**

122

- Red reverse polarity indication LED
- Green ON indicating LEDs
- · Backlit label positions

#### **Component References**

- A-Series Circuit Breakers (p. 82)
- AC Analog Meters (p. 141)
- AC Digital Multimeter (p. 147)
- Red reverse polarity indication LED (p. 153)
- Green ON indicating LEDs (p. 153)
- Traditional Metal Panels include 8031 label set (p. 154)
- 360 Panels include 4206 label set (p. 155)
- Source selection label set included with panels 8077, 8177, 8079, and 8179 (p. 155)
- M2 AC Multimeter (p. 142)

See page 88 for a discussion of ABYC ELCI recommendations for AC Main circuit protection.









Part #	8077 / 8177*		8079 /	8079 / 8179* 8029 / 8129*		1214 / 1215*		
Style	Traditional Metal		Traditional Metal		Traditional Metal		360 Panel System	
Total Positions	Main Only		Main Only		Main + 1 position		Main + 2 positions	
A-Series Circuit Breakers	Main, 30A (7238)	Main, 16A (7294)	Main, 50A (7242)	Main, 32A (7295)	Main, 30A Main, 16A (7238) (7294)		Main, 30A (7414) 2 Branch, 15A (7403)	Main, 16A (7412) 2 Branch, 8A (7401)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Actuator Style	White Toggle		White Toggle		White Toggle		Flat Rocker	
Insulating Back Cover				4026 sold separately (p. 152)		1331 sold separately (p. 152)		
Width x Height in (mm)	2.63 (66.80)	(66.80) x 3.75 (95.25) 2.63 (66.80) x 3.75 (95.25)		5.25 (133.35) x 3.75 (95.25)		4.88 (123.83) x 4.75 (120.65)		
Depth in (mm)	2.50 (63.50)		2.50 (	2.50 (63.50)		63.50)	3.00 (76.20)	









Part #	1206 / 1207*		8043 / 8143*		8409 / 8509*		8405 / 8505*	
Style	360 Pane	el System	Traditional Metal		Traditional Metal		Traditional Metal	
Total Positions	Main + 2	positions	Main + 3	positions	Main + 3	positions	Main + 3 positions	
A-Series Circuit Breakers	Main, 30A (7414) 2 Branch, 15A (7403)	Main, 16A (7412) 2 Branch, 8A (7401)	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)
Nominal Voltage	120V AC	230V AC						
Actuator Style	Flat R	ocker	White Toggle		White Toggle		White Toggle	
AC Meter	0-150V (9353)	0-250V (8245)	0-150V (9353)	0-250V (8245)	0-150V (8244) 0-50A (8246)	0-250V (8245) 0-50A (8246)	Digital Multimeter (8247)	
Insulating Back Cover	2 × 1331 sold separately (p. 152)		4027 sold separately (p. 152)		4027 sold separately (p. 152)		4027 sold separately (p. 152)	
Width x Height in (mm)	4.88 (123.83) x 7.75 (196.85)		5.25 (133.35) x 7.50 (190.50)		5.25 (133.35) x 7.50 (190.50)		5.25 (133.35) x 7.50 (190.50)	
Depth in (mm)	3.00 (	76.20)	2.50 (63.50)		3.00 (76.20)		4.00 (101.60)	









Part #	8099 / 8199*		8027 /	8127*	8412 / 8512*		1230 / 1233*	
Style	Traditional Metal		Traditional Metal		Traditional Metal		360 Panel System	
Total Positions	Main + 4	4 positions	Main + 6	positions	Main + 6	5 positions	Main + 6 positions	
A-Series Circuit Breakers	Main, 30A (7238) 4 Branch, 15A (7210)	Main, 16A (7294) 4 Branch, 8A (7299)	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	Main, 30A (7238) 4 Branch, 15A (7210)	Main, 16A (7294) 4 Branch, 8A (7299)	Main, 30A (7414) 6 Branch, 15A (7403)	Main, 16A (7412) 6 Branch, 8A (7401)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Actuator Style	White	e Toggle	White	Toggle	White Toggle		Flat Rocker	
Insulating Back Cover			4027 sold sepa	arately (p. 152)			2 x 1331 sold se	parately (p. 152)
Width x Height in (mm)	10.50 (266.70) x 3.75 (95.25)		5.25 (133.35) x 7.50 (190.50)		10.50 (266.70) x 4.50 (114.30)		9.25 (234.95) >	(4.75 (120.65)
Depth in (mm)	2.50	(63.50)	2.50 (	63.50)	2.50 (63.50)		3.00 (76.20)	

bluesea.com POWER DISTRIBUTION 123









Part #	1202	/ 1203*	1505	8074 /	8174*	8488 /	<sup>'</sup> 8588*
Style	360 Pane	el System	360 Panel System	Traditional Metal		Traditional Metal	
Total Positions	Main + 6	positions	Main + 6 positions	Main + 8	positions	Main + 8 positions	
A-Series Circuit Breakers	Main, 30A (7414) 6 Branch, 15A (7403)	Main, 16A (7412) 6 Branch, 8A (7401)	Main, 30A (7414) 6 Branch, 15A (7403)	Main, 30A (7238) 5 Branch, 15A (7210)	Main, 16A (7294) 5 Branch, 8A (7299)	Main, 30A (7238) 5 Branch, 15A (7210)	Main, 16A (7294) 5 Branch, 8A (7299)
Nominal Voltage	120V AC	230V AC	120V AC	120V AC	230V AC	120V AC	230V AC
Actuator Style	Flat R	ocker	Flat Rocker	White Toggle		White	Toggle
AC Meter	_	_	M2 AC Multimeter (1838)	0-150V (8244) 0-50A (8246)	0-250V (8245) 0-50A (8246)	0-150V (9353)	0-250V (9354)
Insulating Back Cover	2 × 1331 sold separately (p. 152)			-	-	-	-
Width x Height in (mm)	4.88 (123.83) x 7.75 (196.85)		4.88 (123.82) x 10.75 (273.05)	5.25 (133.35) x	5.25 (133.35) x 11.25 (285.75) 5.25 (13		11.25 (285.75)
Depth in (mm)	3.00 (	76.20)	4.00 (101.60)	3.00 (	76.20)	2.50 (	63.50)







Part #	6406	/ 8506°	8485 /	8585°	80767	81/6"
Style	Traditional Metal		Tradition	Traditional Metal		nal Metal
Total Positions	Main + 8	positions	Main + 11	Main + 11 positions		positions
A-Series Circuit Breakers	Main, 30A (7238) 5 Branch, 15A (7210)	Main, 16A (7294) 5 Branch, 8A (7299)	Main, 30A (7238) 8 Branch, 15A (7210)	Main, 16A (7294) 8 Branch, 8A (7299)	Main, 30A (7238) 8 Branch, 15A (7210)	Main, 16A (7294) 8 Branch, 8A (7299)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Actuator Style	White '	Toggle	White	White Toggle		Toggle
AC Meter	Digital Multimeter (8247)		-	-		0-250V (8245) 0-50A (8246)
Insulating Back Cover	_	-	-	_	-	-
Width x Height in (mm)	5.25 (133.35) x	5.25 (133.35) x 11.25 (285.75)		11.25 (285.75)	10.50 (266.70)	x 7.50 (190.50)
Depth in (mm)	4.00 (1	4.00 (101.60)		63.50)	3.00 (	76.20)







Part #	8407 / 8507*		8464 / 8564*		8465 / 8565*	
Style	Tradition	nal Metal	Traditional Metal		Traditional Metal	
Total Positions	Main + 11 positions		Main + 14 positions		Main + 22 positions	
A-Series	Main, 30A (7238)	Main, 16A (7294)	Main, 30A (7238)	Main, 16A (7294)	Main, 30A (7238)	Main, 16A (7294)
Circuit Breakers	8 Branch, 15A (7210)	8 - Branch, 8A (7299)	8 Branch, 15A (7210)	8 Branch, 8A (7299)	13 Branch, 15A (7210)	13 Branch, 8A (7299)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Actuator Style	White	Toggle	White Toggle		Wh	ite Toggle
AC Meter	Digital Multimeter (8247)					
Width x Height in (mm)	10.50 (266.70) x 7.50 (190.50)		10.50 (266.70) x 7.50 (190.50)		14.75 (374.65) x 7.50 (190.50)	
Depth in (mm)	4.00 (1	01.60)	2.50 (	53.50)	2.50 (63.50)	

# **AC Branch Circuit Breaker Panels**

Distributes current from high amperage inputs into lower amperage circuits

#### **Features**

124

# On indicating LEDs in all circuit positions

#### • Backlit label positions

#### **Component References**

- A-Series Circuit Breakers (p. 82)
- AC Analog Meters (p. 141)
- 360 Panels include 4206 label set (p. 155)
- Traditional Metal Panels include 8031 label set (p. 154)
- Green ON-indicating LEDs (p. 153)







Part #	8058 / 8158*		1210 / 1211*		8097 / 8197*	
Style	Traditional Metal		360 Pane	360 Panel System		nal Metal
Total Positions	3 Positions		4 Positions		6 Positions	
Circuit Breakers	3 A-Series, 15A (7210)	3 A-Series, 8A (7299)	4 A-Series, 15A (7403)	4 A-Series, 8A (7401)	6 A-Series, 15A (7210)	6 A-Series, 8A (7299)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Maximum Amperage	100	0A	100A		100A per bus	
Actuator Style	White <sup>-</sup>	Toggle	Flat Rocker		White Toggle	
Insulating Back Cover	4026 sold sepa	arately (p. 152)	1331 sold separately (152)			
Width x Height in (mm)	5.25 (133.35) x 3.75 (95.25)		4.88 (123.83) x 4.75 (120.65)		10.50 (266.70) x 3.75 (95.25)	
Depth in (mm)	2.50 (6	63.50)	3.00 (	76.20)	2.50 (63.50)	





Part #	1228 / 1229*	8059 / 815

Style	360 Panel System		Traditional Metal		
Total Positions	8 Positions		8 Pos	itions	
Circuit Breakers	8 A-Series, 15A (7403)	8 A-Series, 8A (7401)	5 A-Series, 15A (7210)	5 A-Series, 8A (7299)	
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	
Maximum Amperage	10	00A	100A		
Actuator Style	Flat R	Rocker	White Toggle		
Insulating Back Cover	2 × 1331 sold se	eparately (p. 152)	4027 sold separately (p. 152)		
Width x Height in (mm)	4.88 (123.83) x 7.75 (196.85)		5.25 (133.35) x 7.50 (190.50)		
Depth in (mm)	3.00(	76.20)	2.50 (	63.50)	







	(8.00.0			MA STORY		A DETECTION
Part#	8411 /	8511*	8478	/ 8578*	8480 /	8580*
Style	Tradition	al Metal	Traditio	nal Metal	Tradition	nal Metal
Total Positions	8 Pos	itions	10 Po	sitions	13 Pos	sitions
Circuit Breakers	6 A-Series, 15A (7210)	6 A-Series, 8A (7299)	7 A-Series, 15A (7210)	7 A-Series, 8A (7299)	10 A-Series, 15A (7210)	10 A-Series, 8A (7299)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Maximum Amperage	100A per bus		100A		100A	
Actuator Style	White '	Гoggle	White	Toggle	White	Toggle
Meter (PN)	-	-	0-150V (9353)	0-250V (9354)	-	-
Insulating Back Cover	-	-	-	_	_	_
Width x Height in (mm)	10.50 (266.70)	x 4.50 (114.30)	5.25 (133.35) >	( 11.25 (285.75)	5.25 (133.35) x	11.25 (285.75)
Depth in (mm)	2.50 (6	53.50)	2.50 (	(63.50)	2.50 (	63.50)

<sup>\*230</sup> Volt (typical of Europe)







Part #	8479 / 8579*		8461 /	8561*	8265 /	8165*
Style	Tradition	al Metal	Tradition	Traditional Metal		al Metal
Total Positions	13 Pos	itions	16 Pos	sitions	24 Pos	itions
Circuit Breakers	10 A-Series, 15A (7210)	10 A-Series, 8A (7299)	10 A-Series, 15A (7210)	10 A-Series, 8A (7299)	15 A-Series, 15A (7210)	15 A-Series, 8A (7299)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Maximum Amperage	100A per bus		100A per bus		100A per bus	
AC Meter	0-150V (9353)	0-250V (9354)	-	-	-	-
Actuator Style	White <sup>-</sup>	Гoggle	White '	Toggle	White Toggle	
Insulating Back Cover						-
Width in (mm)	10.50 (266.70) x 7.50 (190.50)		10.50 (266.70) x 7.50 (190.50)		14.75 (374.64) x 7.50 (190.50)	
Depth in (mm)	2.50 (6	53.50)	2.50 (63.50)		2.50 (63.50)	

<sup>\*230</sup> Volt (typical of Europe)

# AC 120/240 Volt (60Hz) Circuit Breaker Panels

Provides circuit protection for 240V AC systems

- 1168 Provides 1 spare rocker aperture
- C-Series Circuit Breakers (p. 80)





Part #	7372	1168
Style	Traditional Metal	360 Panel System
Total Positions	Main Only	Main + 1 position
Circuit Breaker	C-Series, 1 Main, 50A (7287)	C-Series, 1 Main, 50A (7565)
Poles	3	3
Nominal Voltage	120/240V	120/240V
Maximum Voltage	240V AC	240V AC
Actuator Style	White Toggle	Flat Rocker
Width in (mm)	5.25 (133.35)	4.88 (123.83)
Height in (mm)	3.75 (95.25)	4.75 (120.65)
Depth in (mm)	pth in (mm) 3.00 (76.20)	



# **AC Residual Current Circuit Breaker Panels**

Reduces the risk of fire and shock hazards caused by defects in appliances and circuit wiring

#### **Features**

 Provides Main circuit protection with branch circuits

#### **Component References**

- ELCI Main Circuit Breakers (p. 87)
- A-Series Circuit Breakers (p. 82)
- AC Analog Meters (p. 141)
- M2 AC Multimeter (p. 142)

See page 88 for a discussion of ABYC ELCI recommendations for AC Main circuit protection.









Part #	1502	8100	1190	8101
Style	360 Panel System	Traditional Metal	360 Panel System	Traditional Metal
Total Positions	ELCI + 1 Position	ELCI	ELCI + 1 position	ELCI + 5 positions
GFCI/ELCI Circuit Breaker	1 - ELCI Main, 30A (3102)	1 - ELCI Main, 30A (3106)	1 - ELCI Main, 30A (3102)	1 - ELCI Main, 30A (3106)
A-Series Circuit Breaker			1 - Branch, 15A AC (7403)	2 - Branch, 15A (7210)
Amperage Trip Reference	30A	30A	30A	30A
Leakage Trip Amperage	30mA	30mA	30mA	30mA
Maximum Voltage	120V	120V	120V	120V
Actuator Style	Flat Rocker	White Toggle	Flat Rocker	White Toggle
Insulating Panel Back	1331 sold separately (p. 152)		1331 sold separately (p. 152)	
Width x Height in (mm)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 7.50 (190.50)
Depth in (mm)	3.99 (101.4)	3.50 (88.90)	3.99 (101.4)	3.50 (88.90)









Part #	8102	1193	1503	1504
Style	Traditional Metal	360 Panel System	360 Panel System	360 Panel System
Total Positions	ELCI + 2 positions	ELCI + 5 positions	ELCI + 5 positions	ELCI + 5 positions
ELCI Circuit Breaker	1 - ELCI Main, 30A AC (3106)	1 - ELCI Main, 30A AC (3102)	1 - ELCI Main, 30A AC (3102)	1 - ELCI Main, 30A AC (3102)
A-Series Circuit Breaker	2 - Branch, 15A AC (7210)	4 - Branch, 15A AC (7403)	5- Branch, 15A AC (7403)	5 - Branch, 15A AC (7403)
Amperage Trip Reference	30A AC	30A AC	30A AC	30A AC
Leakage Trip Amperage	30mA	30mA	30mA	30mA
Maximum Voltage	120V AC	120V AC	120V AC	120V AC
Actuator Style	White Toggle	Flat Rocker	Flat Rocker	Flat Rocker
Insulating Panel Back		2 x 1331 sold separately (p. 152)	2 x 1331 sold separately (p. 152)	2 x 1331 sold separately (p. 152)
AC Meter	0-150V (9353)	<del></del>		M2 AC Multimeter (1838)
Width x Height in (mm)	5.25 (133.35) x 7.50 (190.50)	9.25 (234.95) x 4.75 (120.65)	4.88(123.83) x 7.75(196.85)	4.88 (123.83) x 10.75 (273.05)
Depth in (mm)	3.50 (88.9)	3.99 (101.4)	3.99 (101.40)	3.99 (101.40)

# **AC Source Selection Circuit Breaker Panels**

Allows selecting between multiple AC sources to supply power to the AC branch distribution system

#### **Features**

- Lockout slides ensure that no two sources of AC power are connected to the circuit simultaneously
- · Backlit label positions

#### **Component References**

- A-Series Circuit Breakers (p. 82)
- AC Analog Meters (p. 141)
- AC Digital Multimeter (p. 147)
- Red reverse polarity indication LED (p. 153)
- Green ON indicating LEDs (p. 153)
- Traditional Metal Panels with branch circuit breakers include 8031 label set (p. 154)
- 360 Panels with branch circuit breakers include 4206 label set (p. 155)
- All panels include a reverse polarity label and a source selection label set (p. 155)









1208 /	1209*	1231 /	1232*	8032 /	<sup>7</sup> 8132*	8061 /	8161*
360 Pane	el System	360 Pan	el System	Traditio	nal Metal	Tradition	nal Metal
2 So	urces	2 So	urces	2 So	urces	2 So	urces
2 Main, 30A (7574)	2 Main, 16A (7572)	2 Main, 50A (7577)	2 Main, 32A (7575)	2 Main, 30A (7238)	2 Main, 16A (7294)	2 Main, 50A (7242)	2 Main, 32A (7295)
120V AC	230V AC	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Raised	Rocker	Raised	Rocker	White	Toggle	White	Toggle
1331 sold sep	arately (p. 152)	1331 sold sep	arately (p. 152)	4026 sold sep	arately (p. 152)	4026 sold sep	arately (p. 152)
4.88 (123.83)	x 4.75 (120.65)	4.88 (123.83)	x 4.75 (120.65)	5.25 (133.35)	x 3.00 (76.20)	5.25 (133.35)	x 3.00 (76.20)
3.00 (	76.20)	3.00 (	76.20)	3.00 (	76.20)	3.00 (	76.20)
	360 Pane 2 Soi 2 Main, 30A (7574) 120V AC Raised 1331 sold sep. 4.88 (123.83)	360 Panel System 2 Sources 2 Main, 30A 2 Main, 16A (7574) (7572)	360 Panel System     360 Panel       2 Sources     2 Soi       2 Main, 30A (7574)     2 Main, 16A (7572)     2 Main, 50A (7577)       120V AC     230V AC     120V AC       Raised Rocker     Raised       1331 sold separately (p. 152)     1331 sold sep       4.88 (123.83) x 4.75 (120.65)     4.88 (123.83)	360 Panel System 2 Sources 2 Main, 30A (7574) 2 Main, 16A (7577) 2 Main, 50A (7577) 2 Main, 30A (7577) 2 Main, 50A (7577) 2 Main, 30A (7577) 2 Main, 50A (7577) 2 Main, 30A (7575) 120V AC 2 30V AC Raised Rocker Raised Rocker 1331 sold separately (p. 152) 4.88 (123.83) x 4.75 (120.65) 4.88 (123.83) x 4.75 (120.65)	360 Panel System     360 Panel System     Tradition       2 Sources     2 Sources     2 Sources     2 Sources       2 Main, 30A (7574)     2 Main, 16A (7577)     2 Main, 32A (7575)     2 Main, 30A (7238)       120V AC     230V AC     120V AC     230V AC     120V AC       Raised Rocker     Raised Rocker     White       1331 sold separately (p. 152)     1331 sold separately (p. 152)     4026 sold sep       4.88 (123.83) x 4.75 (120.65)     4.88 (123.83) x 4.75 (120.65)     5.25 (133.35)	360 Panel System       360 Panel System       Traditional Metal         2 Sources       2 Sources       2 Sources         2 Main, 30A (7574)       2 Main, 50A (7575)       2 Main, 32A (7294)         120V AC       230V AC       120V AC       230V AC         Raised Rocker       Raised Rocker       White Toggle         1331 sold separately (p. 152)       1331 sold separately (p. 152)       4026 sold separately (p. 152)         4.88 (123.83) x 4.75 (120.65)       4.88 (123.83) x 4.75 (120.65)       5.25 (133.35) x 3.00 (76.20)	360 Panel System         360 Panel System         Traditional Metal         2 Solve         2 Main, 30A (7294)         2 Main, 30A (7294)         2 Main, 30A (7294)         2 Main, 30A (7294)         2 Main, 30A (7294) <th< td=""></th<>







Part #	8498 /	8598*	8499 /	<sup>7</sup> 8599*	8467 /	8567*
Style	Tradition	nal Metal	Traditional Metal		Traditional Metal	
Total Positions	3 Sources	+ Transfer	2 Sources +	- 4 positions	2 Sources +	4 positions
A-Series Circuit Breakers	2 Main, 30A (7238) 1 Main, 50A (7242) 1 Transfer, 30A (7238)	2 Main, 16A (7294) 1 Main, 32A (7295) 1 Transfer, 16A (7294)	2 Main, 30A (7238) 2 Branch, 15A (7210)	2 Main, 16A (7294) 2 Branch, 8A (7299)	2 Main, 30A (7238) 2 Branch, 15A (7210)	2 Main, 16A (7294) 2 Branch, 8A (7299)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Actuator Style	White	Toggle	White Toggle		White Toggle	
Insulating Back Cover	<del></del>		<del></del>		4027 sold sepa	arately (p. 152)
Width x Height in (mm)	10.50 (266.70) x 4.50 (114.30)		10.50 (266.70) x 4.50 (114.30)		5.25 (133.35)	× 7.50 (190.50)
Depth in (mm)	3.00 (	76.20)	3.00 (	76.20)	3.00 (76.20)	







			12.4111.0000			A STATE OF THE PARTY OF THE PAR
Part #	8489 /	8589*	8462 /	8562*	8466 /	8566*
Style	Tradition	nal Metal	Tradition	nal Metal	Tradition	nal Metal
Total Positions	2 Sources +	6 positions	2 Sources +	9 positions	2 Sources +	9 positions
A-Series Circuit Breakers	2 Main, 30A (7238) 3 Branch, 15A (7210)	2 Main, 16A (7294) 3 Branch, 8A (7299)	2 Main, 30A (7238) 6 Branch, 15A (7210)	2 Main, 16A (7294) 6 Branch, 8A (7299)	2 Main, 30A (7238) 6 Branch, 15A (7210)	2 Main, 16A (7294) 6 Branch, 8A (7299)
Nominal Voltage	120V AC	230V AC	120V AC	230V AC	120V AC	230V AC
Actuator Style	White '	Toggle	White Toggle		White Toggle	
Meter	0-150V (9353)	0-250V (9354)	0-150V (9353)	0-250V (9354)	_	_
Insulating Back Cover			<del></del>		-	_
Width x Height in (mm)	5.25 (133.35) x	11.25 (285.75)	10.50 (266.70)	x 7.50 (190.50)	5.25 (133.35) x	11.25 (285.75)
Depth in (mm)	3.00 (7	76.20)	3.00 (	76.20)	3.00 (	76.20)

<sup>\*230</sup> Volt (typical of Europe)

# **AC Source Selection Rotary Switch Panels**

Provides a solution for managing AC sources when circuit protection is provided elsewhere

- Panels include green ON and red Reverse Polarity indicating LEDs and source selection label set (p. 155)
- 360 Panel System panels include backlit label positions

#### 30 Amp 2 Positions + OFF, 2 Pole Rotary Switch

Switches 2 sources

128

· Allows connecting one of two different AC sources to one circuit

# Regulatory CE marked UL listed Part # 9009 Style Rotary Switch







Line (Hot)

230V |



Line (Hot) -

Part #	9009	1481	1484*	8367	8359*
Style	Rotary Switch	360 Panel System	360 Panel System	Traditional Metal	Traditional Metal
Max. Operating V AC	600V AC	120V AC	230V AC	120V AC	230V AC
Wire Size Range	14-10 AWG	14-10 AWG	14-10 AWG	14-10 AWG	14-10 AWG
Insulating Panel Back		1331 sold separately (p. 152)	1331 sold separately (p. 152)	4026 sold separately (p. 152)	4026 sold separately (p. 152)
Width x Height in (mm)	1.89 (48.00) x 1.89 (48.00)	4.88 (123.83) x 4.75 (120.65)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	1.91 (48.51)	1.91 (48.51)	1.91 (48.51)	1.91 (48.51)	1.91 (48.51)

# 65 Amp 2 Positions + OFF, 2 Pole Rotary Switch

- · Switches 2 sources
- Allows connecting one of two different AC sources to one circuit







Source 1 (ex. SHORE)



Line (Hot)



Source 2 (ex. GEN)

Line (Hot) =

Part #	9011	1483	1486*	8365	8357*
Style	Rotary Switch	360 Panel System	360 Panel System	Traditional Metal	Traditional Metal
Max. Operating V AC	600V AC	120V AC	230V AC	120V AC	230V AC
Wire Size Range	12-6 AWG	12-6 AWG	12-6 AWG	12-6 AWG	12-6 AWG
Insulating Panel Back		1331 sold separately (p. 152)	1331 sold separately (p. 152)	4026 sold separately (p. 152)	4026 sold separately (p. 152)
Width x Height in (mm)	2.52 (64.00) x 2.52 (64.00)	4.88 (123.83) x 4.75 (120.65)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	2.41 (61.21)	2.41 (61.21)	2.41 (61.21)	2.41 (61.21)	2.41 (61.21)

# 30 Amp 3 Positions + OFF, 2 Pole Rotary Switch

- Switches 3 sources
- Allows connecting one of three different AC sources to one circuit









Source 1 (ex. SHORE 1)






Line (Hot) -

	-				
Part #	9010	1482	1485*	8366	8358*
Style	Rotary Switch	360 Panel System	360 Panel System	Traditional Metal	Traditional Metal
Max. Operating V AC	600V AC	120V AC	230V AC	120V AC	230V AC
Wire Size Range	14-10 AWG	14-10 AWG	14-10 AWG	14-10 AWG	14-10 AWG
Insulating Panel Back		1331 sold separately (p. 152)	1331 sold separately (p. 152)	4026 sold separately (p. 152)	4026 sold separately (p. 152)
Width x Height in (mm)	1.89 (48.00) x 1.89 (48.00)	4.88 (123.83) x 4.75 (120.65)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	2.41 (61.21)	2.41 (61.21)	2.41 (61.21)	2.41 (61.21)	2.41 (61.21)

**POWER DISTRIBUTION** 129

#### 65 Amp 2 Positions + OFF, 3 Pole Rotary Switch

- · Allows connecting one of two different AC sources to one circuit
- Switches 2-120/240V AC sources
- · Switches both lines (hots) and neutral



#### Regulatory CE marked **UL** listed








9019	1487	8363
Rotary Switch	360 Panel System	Traditional Metal
600V AC	240V AC	240V AC
12-6 AWG	12-6 AWG	12-6 AWG
2.52 (64.00) x 2.52 (64.00)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)
3.65 (92.71)	3.65 (92.71)	3.65 (92.71)
	Rotary Switch 600V AC 12-6 AWG  2.52 (64.00) × 2.52 (64.00)	Rotary Switch         360 Panel System           600V AC         240V AC           12-6 AWG         12-6 AWG               2.52 (64.00) x 2.52 (64.00)         4.88 (123.83) x 4.75 (120.65)

## 30 Amp 2 Positions + OFF, 4 Pole Rotary Switch

- Switches between 2-120V AC shore power sources and 1-120/240 Volt AC source to 2–120 Volt AC load groups
- · Switches both lines (hots) and neutral

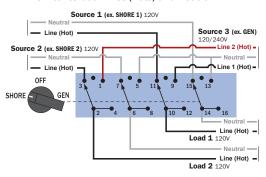

#### Regulatory CE marked **UL** listed








Part #	6337	1489	8386
Style	Rotary Switch	360 Panel System	Traditional Metal
Max. Operating V AC	600V AC	240V AC	240V AC
Wire Size Range	14-10 AWG	14-10 AWG	14-10 AWG
Insulating Panel Back		1331 sold separately (p. 152)	-
Width x Height in (mm)	1.89 (48.00) x 1.89 (48.00)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	2.98 (75.69)	2.98 (75.69)	2.98 (75.69)

## 65 Amp 2 Positions + OFF, 4 Pole Rotary Switch

- Switches between 2–120V AC shore power sources and 1–120/240 Volt AC source to 2–120 Volt AC load groups
- · Switches both lines (hots) and neutral

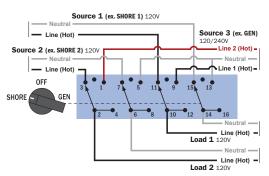

#### Regulatory CE marked **UL** listed










Part #	9093	1480	8369
Style	Rotary Switch	360 Panel System	Traditional Metal
Max. Operating V AC	600V AC	240V AC	240V AC
Wire Size Range	12-6 AWG	12-6 AWG	12-6 AWG
Insulating Panel Back			
Width x Height in (mm)	2.52 (64.00) x 2.52 (64.00)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	4.50 (114.30)	4.50 (114.30)	4.50 (114.30)

# 65 Amp 3 Positions + OFF, 3 Pole Rotary Switch

- Allows connecting one of three different AC sources to one circuit
- Switches 3-120/240V AC sources
- · Switches both lines (hot) and neutral

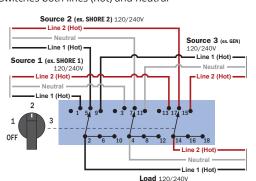

Regulatory CE marked **UL** listed







Part #	9077	1488	8361
Style	Rotary Switch	360 Panel System	Traditional Metal
Max. Operating V AC	600V AC	240V AC	240V AC
Wire Size Range	12-6 AWG	12-6 AWG	12-6 AWG
Insulating Panel Back			
Width x Height in (mm)	2.52 (64.0) x 2.52 (64.0)	4.88 (123.83) x 4.75 (120.65)	5.25 (133.35) x 3.75 (95.25)
Depth in (mm)	5.50 (139.70)	5.50 (139.70)	5.50 (139.70)

# **AC/DC Combination Circuit Breaker Panels**

Combines AC and DC switching, circuit protection, source selection and monitoring into a single panel

#### **Features**

130

- ON indicating LEDs installed in all circuit positions
- · Backlit label positions
- Includes toggle switch to monitor voltage on up to three batteries
- · Circuit identification label sets included
- Insulating covers are included with AC/DC 360 Panels

#### **Component References**

- A-Series Circuit Breakers (p. 82)
- C-Series Circuit Breakers (p. 84)
- DC and AC Analog Meters (p. 140, 141)
- DC and AC Digital Multimeters (p. 146, 147) M2 Vessel System Monitor (VSM) (p. 142)
- 360 Panel System AC Insulating Rear Covers (p. 152)
- Traditional Metal Panel AC insulating Rear Covers (p. 152)
- Traditional Metal Panels include 8031 and 8030 label sets (p. 154-155)
- 360 Panels include 4206 and 4205 label sets (p. 155)





Part #	8084 / 8184*		8095 / 8195*	
Style	Tradition	nal Metal	Tradition	nal Metal
Total AC Positions	Main + 6	positions	Main + 8	positions
Total DC Positions	Main + 15	positions	Main + 29	positions
AC Circuit Breakers	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	Main, 30A (7238) 5 Branch, 15A (7210)	Main, 16A (7294) 5 Branch, 8A (7299)
DC Circuit Breakers	Main, 100A (7250I) 9 Branch, 15A (7210)	Main, 100A (7250I) 9 Branch, 15A (7210)	Main, 100A DC (7250I) 20 Branch, 15A DC (7210)	Main, 100A (7250I) 20 Branch, 15A (7210)
AC/DC Voltage	120V AC/12V DC	230V AC/12V DC	120V AC/12V DC	230V AC/12V DC
Insulating Panel Back	4029 sold sepa	arately (p. 152)		
Actuator Style	White	Toggle	White Toggle	
AC Meters	0-150V AC (9353)	0-250V AC (9354)	0-150V AC (9353), 0-50A AC (9630)	0-250V AC (9354), 0-50A AC (9630)
DC Meters	8-16V DC (8003), 0-100A DC (8017)		8-16V DC (8003), 0-100A DC (8017)	
Width x Height in (mm)	14.75 (374.65) x 10.00 (254.00)		19.50 (495.30) x 11.50 (292.10)	
Depth in (mm)	3.00 (	76.20)	3.00 (76.20)	





Part #	1218 / 1219*		8413
Style	360 Pane	el System	Traditional Metal
Total AC Positions	Main + 6	positions	Main + 8 positions
Total DC Positions	Main + 19	positions	Main + 14 positions
AC Circuit Breakers	Main, 30A (7414) 6 Branch, 15A (7403)	Main, 16A (7412) 6 Branch, 8A (7401)	Main, 30A (7238) 8 Branch, 15A (7210)
DC Circuit Breakers	Main, 100A (7549) 19 Branch, 15A (7403)	Main, 100A (7549) 19 Branch, 15A (7403)	Main, 100A DC (7250I) 14 Branch, 15A (7210)
AC/DC Voltage	120V AC/12V DC	230V AC/12V DC	120V AC/12/24V DC
Insulating Panel Back	1331 Included w	ith panel (p. 152)	<del></del>
Actuator Style	Flat R	ocker	White Toggle
AC Meter, DC Meter	Digital Multimeter (8247), Digital Multimeter (8248)		M2 VSM (1850)
Width x Height in (mm)	13.63 (346.08)	x 10.75 (273.05)	15.77 (400.50) x 9.25 (234.95)
Depth in (mm)	3.00 (	76.20)	3.00 (76.20)





Part #	8408 / 8508*		8086 / 8186*		
Style	Traditional Metal		Traditional Metal		
Total AC Positions	Main + 6 positions		3 Sources + 12 pc	ositions + Transfer	
Total DC Positions	Main + 18	positions	Main + 19	positions	
AC Circuit Breakers	Main, 30A (7238) 3 Branch, 15A (7210)	Main, 16A (7294) 3 Branch, 8A (7299)	2 Main, 30A (7238) 1 Main, 50A (7242) 1 Transfer, 30A (7238) 6 Branch, 15A (7210)	2 Main, 16A (7294) 1 Main, 32A (7295) 1 Transfer, 16A (7294) 6 Branch, 8A (7299)	
DC Circuit Breakers	Main, 100A (7250I) Main, 100A (7250I) 12 Branch, 15A (7210) 12 Branch, 15A (7210)		Main, 100A (7250I) 13 Branch, 15A (7210)		
AC/DC Voltage	120V AC/12/24V DC	230V AC/12/24V DC	120V AC/12V DC 230V AC/12V DC		
Insulating Panel Back	4029 sold sepa	rately (p. 152)	4031 sold separately (p. 152)		
Actuator Style	White '	Toggle	White Toggle		
AC Meters	Digital Multir	neter (8247)	0-150V (9353), 0-50A (9630)	0-250V (9354), 0-50A (9630)	
DC Meters	Digital Multimeter (8248)		8-16V (8003), 0-100A (8017)		
Width x Height in (mm)	15.75 (400.05) x	(10.00 (254.00)	19.50 (495.30) x 11.50 (292.10)		
Depth in (mm)	4.00 (1	01.60)	3.00 (76.20)		

<sup>\*230</sup> Volt (typical of Europe)



# Design and Order a Custom Panel in Three Easy Steps

#### Design and Order custom panels online

A Custom 360 Panel can be created in a fraction of the time required by other custom panel shops. The 360 Panel System uses an open frame to mount a broad selection of modules, allowing multiple functions to be combined in a single panel. This innovative design offers a wide choice of AC and DC panel features, can accommodate future changes, and permits rapid assembly. With options ranging from battery management to source selection, the 360 Panel System provides a wide range of design flexibility.

#### Launch the Panel Wi

the Panel Wizard at panelwizard.bluesea.com.



Design

the panel with modules, circuit breakers, and labels. The list price is updated with each change.



Save

the panel design and request a quote.





Blue Sea Systems labels are made using a scratch resistant polycarbonate material and are back-printed for durability.

Custom Labels for the 360 Panel System can be ordered in any language and are available directly from Blue Sea Systems along with over 500 standard or square format labels.

#### Completed 3 × 3 Panel









# **Custom 360 Panel System**


Flexible panel configurations from a single module to a 25 module panel with 100 circuit breakers.

Rows x Columns	Panel Height in (mm)	Panel Width in (mm)	Cut Out Height in (mm)	Cut Out Width in (mm)
1 x 1	4.75 (120.65)	4.88 (123.83)	3.31 (84.07)	4.38 (111.13)
2 x 1	7.75 (196.85)	4.88 (123.83)	6.31 (160.27)	4.38 (111.13)
3 x 1	10.75 (273.05)	4.88 (123.83)	9.31 (236.47)	4.38 (111.13)
4 x 1	13.75 (349.25)	4.88 (123.83)	12.31 (312.67)	4.38 (111.13)
5 x 1	16.75 (425.45)	4.88 (123.83)	15.31 (388.87)	4.38 (111.13)
1 x 2	4.75 (120.65)	9.25 (234.95)	3.31 (84.07)	8.75 (222.25)
2 x 2	7.75 (196.85)	9.25 (234.95)	6.31 (160.27)	8.75 (222.25)
3 x 2	10.75 (273.05)	9.25 (234.95)	9.31 (236.47)	8.75 (222.25)
4 x 2	13.75 (349.25)	9.25 (234.95)	12.31 (312.67)	8.75 (222.25)
5 x 2	16.75 (425.45)	9.25 (234.95)	15.31 (388.87)	8.75 (222.25)
1 x 3	4.75 (120.65)	13.63 (346.08)	3.31 (84.07)	13.13 (333.38)
2 x 3	7.75 (196.85)	13.63 (346.08)	6.31 (160.27)	13.13 (333.38)
3 x 3	10.75 (273.05)	13.63 (346.08)	9.31 (236.47)	13.13 (333.38)
4 x 3	13.75 (349.25)	13.63 (346.08)	12.31 (312.67)	13.13 (333.38)
5 x 3	16.75 (425.45)	13.63 (346.08)	15.31 (388.87)	13.13 (333.38)
1 x 4	4.75 (120.65)	18.00 (457.20)	3.31 (84.07)	17.50 (444.50)
2 x 4	7.75 (196.85)	18.00 (457.20)	6.31 (160.27)	17.50 (444.50)
3 x 4	10.75 (273.05)	18.00 (457.20)	9.31 (236.47)	17.50 (444.50)
4 x 4	13.75 (349.25)	18.00 (457.20)	12.31 (312.67)	17.50 (444.50)
5 x 4	16.75 (425.45)	18.00 (457.20)	15.31 (388.87)	17.50 (444.50)
1 x 5	4.75 (120.65)	22.38 (568.33)	3.31 (84.07)	21.88 (555.63)
2 x 5	7.75 (196.85)	22.38 (568.33)	6.31 (160.27)	21.88 (555.63)
3 x 5	10.75 (273.05)	22.38 (568.33)	9.31 (236.47)	21.88 (555.63)
4 x 5	13.75 (349.25)	22.38 (568.33)	12.31 (312.67)	21.88 (555.63)
5 x 5	16.75 (425.45)	22.38 (568.33)	15.31 (388.87)	21.88 (555.63)





m-Series Battery Switch (p. 30)






m-ACR Automatic Charging Relay (p. 46)



m-LVD Low Voltage Disconnect (p. 40)



1 x 4 Panel

2 x 4 Panel

3 x 4 Panel

4 x 4 Panel

5 x 4 Panel

1 x 5 Panel

2 x 5 Panel

3 x 5 Panel

4 x 5 Panel

5 x 5 Panel



Battery Management (p. 94)



Battery Management Blank

# **Custom BusBar Modules**

Consolidate bussed terminations in a 360 Custom Panel module

- Utilize blank space in a 360 Custom Panel frame
- Ideal for DC negative, AC Neutral, and AC Ground connections
- 5 different bus bar configuration options

#### Panel Backs Shown Below



2x1 Panel 2722

2x1 Panel 2702







2x1 Panel 2128



1x1 Panel 2701



DC Flat Rocker Circuit Breaker (p. 83)



Rotary Switch Source Selection (p. 128)



M2 OLED Meter (p. 142)



Mastervolt Smart Remote



COTS Circuit Breaker (p. 80)



**Circuit Breaker Source Selection** 



Digital Meter (p. 146)



2 Inch Gauge Blank (p. 149)



Push Button Circuit Breaker with Rocker Switch (p. 75, 94)



Residual Current Circuit Breaker (p.87)



P12 Battery Charger Display (p. 20)



Socket, Dual USB Charger (p. 24, 25)



Push Button Circuit Breaker (p. 75)



European RCBO Mount



Analog Meter (p. 140)



DC Accessories (p. 24, 25, 145)



Bilge Pump



285 Series Circuit Breaker (p. 78)



120V AC Dual GFCI Outlet (p. 152)



120V AC Dual Outlet (p. 152)



AC Flat Rocker Circuit Breaker (p. 83)



Blank / Custom BusBar Module



120V AC Dual Outlet Blank

# **Custom 360 Panel System**

# Original equipment aboard the world's finest boats and specialty vehicles

Blue Sea Systems Custom 360 Panels are installed as original equipment aboard recreational and commercial boats, emergency response vehicles, and commercial applications.





EarthRoamer builds vehicles which can go beyond where the road ends. They rely on Blue Sea Systems electrical products, including the Custom 360 Panel, to keep their critical systems functioning.














Black Cove Yachts builds boats which use Blue Sea Systems products including Custom 360 Panels aboard the BC37.

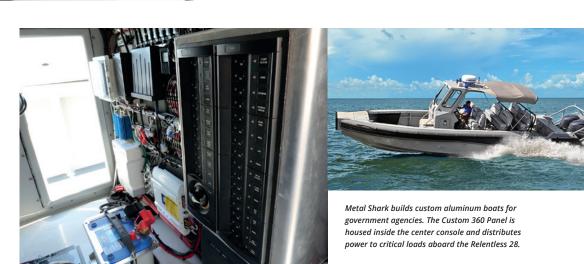

# **METERS**

**Analog** 



140

AC and DC Meters with backlighting for low light conditions.

**M2 OLED Digital** 



142

Measures essential electrical system parameters with adjustable alarms and an auto-dimming display. **Mini OLED Digital** 



145

Monitors key functions on a bright, waterproof, daylight readable screen.

Digital



146

Monitors key AC and DC functions.



#### **Direct Current (DC) Monitoring**

Direct Current is typically derived from batteries, but can also be produced by converting AC Current to DC Current using a battery charger. Typically the values measured are Volts, Amps and Amp-Hours (State-of-Charge).

# **METERS**

#### Mini Clamp Multimeter



Compact and feature-rich AC/DC Multimeter simplifies diagnosis of marine electrical problems.

#### **DC Shunts**



149

For use with DC Ammeters.

#### **Temperature Sensors**



149

For use with the M2 OLED and Mini OLED Meters.

#### **AC Transformers**



149

For use with AC Ammeters.



#### **Alternating Current (AC) Monitoring**

Alternating Current, known more typically as household current, can also be produced by converting DC current to AC current through the use of an inverter. Typically the values measured are Volts, Amps, Watts, and Frequency.

140 METERING bluesea.com

# **DC Analog Meters**

#### Meters with backlighting for low light conditions

- Includes appropriate external DC shunt (p. 149) when required
- Backlit meter face (separate 12V or 24V DC backlight connections)





8028

Part #	Function	Operating Amps (Meter)	Operating Amps (Backlight)	Connection
8028	Micro Voltmeter 8-16V DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire, 3 connections for backlight
8003	Standard Voltmeter 8–16V DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire, 3 connections for backlight
8240	Standard Voltmeter 18–32V DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire, 3 connections for backlight





8041

8005

Part #	Function	Operating Amps (Meter)	Operating Amps (Backlight)	Shunt Type	Connection
8041	Micro Ammeter 0-50A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at full scale	2 wire from shunt, 3 connections for backlight
8005	Standard Ammeter 0-25A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	Internal	2 wire inline, 3 connections for backlight
8022	Standard Ammeter 0–50A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at full scale	2 wire from shunt, 3 connections for backlight
8017	Standard Ammeter 0–100A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at full scale	2 wire from shunt, 3 connections for backlight
8018	Standard Ammeter 0–150A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at full scale	2 wire from shunt, 3 connections for backlight
8019	Standard Ammeter 0–200A DC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	External—50 mV at full scale	2 wire from shunt, 3 connections for backlight





8254

8253

Part #	Function	Shunt Type	Connection	Meter Face Size in (mm)
8252*	Zero Center Ammeter 50-0-50A DC	External—50 mV at full scale	2 wire from shunt, 3 connections for backlight	2.75 (69.85)
8253*	Zero Center Ammeter 100-0-100A DC	External—50 mV at full scale	2 wire from shunt, 3 connections for backlight	2.75 (69.85)

<sup>\*</sup>Meters read both discharge and charge current

# **DC Analog Voltmeter Panels**

Enables voltage monitoring on up to 3 battery banks with one analog meter

- Includes standard 8003 DC Analog Voltmeter
- Displays voltage from 8V-16V DC
- 3 position switch for multiple battery banks







1473 **360 Panel System** 4.88" x 4.75" (123.83mm x 120.65mm)

# **AC Analog Meters**

#### Meters with backlighting for low light conditions

- Includes appropriate external transformer (p. 149) when required
- Backlit meter face (separate 12V or 24V DC backlight connections)





8244


Part#	Function	Operating Amps (Meter)	Operating Amps (Backlight)	Connection
8244	Micro Voltmeter 0-150V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire to AC hot and neutral, 3 connections for backlight
8245	Micro Voltmeter 0-250V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire to AC hot and neutral, 3 connections for backlight
9353	Standard Voltmeter 0-150V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire to AC hot and neutral, 3 connections for backlight
9354	Standard Voltmeter 0–250V AC	1 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire to AC hot and neutral, 3 connections for backlight





8246

Part #	Function	Operating Amps Meter)	Operating Amps (Backlight)	Connection
8246	Micro Ammeter 0-50A AC	50 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire from coil slipped over wire to be measured, 3 connections for backlight
9630	Standard Ammeter 0-50A AC	50 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire from coil slipped over wire to be measured, 3 connections for backlight
8258	Standard Ammeter 0-100A AC	50 mA at full scale	16 mA@12V DC, 20 mA@24V DC	2 wire from coil slipped over wire to be measured, 3 connections for backlight

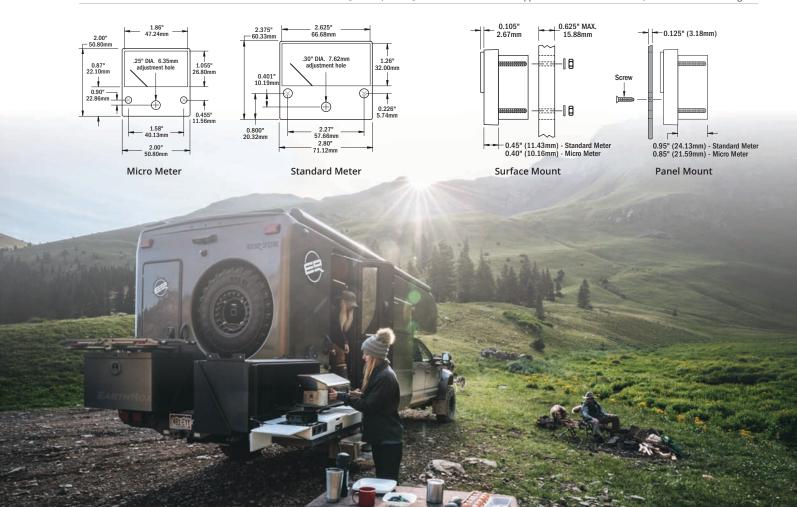

142 METERING bluesea.com

# **M2 OLED Digital Meters**

The M2 Organic LED Digital Monitor measures essential electrical system parameters with adjustable alarms and an auto-dimming display. The M2 Monitors include a MOSFET External Circuit Relay (ECR) which can be used to control external circuits based on any value measured by the M2.

- Auto-dimming, bright Organic LED display is easy to read 80dB alarm on all models
- · Isolated 500mA MOSFET relay
- Includes external DC Shunt or AC Current Transformer when required

Display Size	55mm x 28mm
Power Supply Voltage	7V-70V DC
Power Consumption	0.3W-1.0W*
Regulatory	Monitor face is IP66 - protected against powerful water jet when installed according to instructions (see inside back cover)

<sup>\*</sup> Variable with voltage, display intensity, and sleep mode

#### **Mounting Options**









Surface mount Flat panel mount

1525 (meter not included)

Part#	Description	Width in (mm)	Height in (mm)
1525	360 Blank Panel - M2 OLED	4.88 (123.83)	4.75 (120.65)

#### **Dimensions**

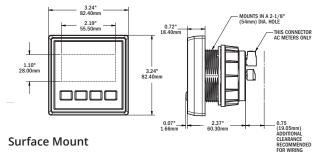



#### **Related Products**



page 149





page 149



page 152



DC Shunts page 149







See page 144 for additional information



	Vessel Systems Monitor	
Part #	1850	Π
Meter Type	AC, DC, Tank, Bilge	
Functions	Performs comprehensive monitoring of four critical systems. NMEA 2000 Certified	
DC Voltage		
Nominal	12V, 24V, 36V, 48V	Т
Range	0-70V	
Resolution	0.01V DC	
Accuracy	+/- 1%	
Alarm Activation	High / Low Voltage	
DC Current		
Shunt included	8255 (500A / 50mV)	Т
Range	-500A to 500A	
Accuracy	+/- 2%	
Resolution (100 to 500)	1A	
Resolution (0.0 to 99.9)	0.1A	
Alarm Activation	High Current, Low Battery	
AC Voltage		
Range	40V-300V AC (RMS)	Т
Accuracy	+/- 1%	
Resolution	1V AC	
Alarm Activation	High / Low Voltage	
AC Current		
Range	0-150A (300A optional)**	
Accuracy	+/- 2%	
Resolution	1A	
Resolution	0.1A	
Transformer	8256 (150A / 50mA)	
Alarm Activation	High Current	
Frequency		
Range	40Hz-90Hz	
Resolution	1Hz	
Alarm Activation	High / Low Frequency	
Power		
Range	0W-45kW	
Resolution (0W-9990W)	10W	
Resolution (10kW-45kW)	0.1kW	
Tanks/Bilge		
Senders	European: 10–180 Ω VDO, North American: 240–33 Ω Teleflex, Blue Sea Systems Ultrasonic (1810, 1811) SV Sender, Custom	
Custom Tank Shapes	Auto Calibration	
Inputs	2	
Tank Alarm Activation	High / Low Levels	
Bilge Alarm Activation	Run time per hour, Cycles per 24-hour	

<sup>\*\*</sup> Will achieve 300A with an optional current transformer 1829















DC Meters			AC Meters		Tank	Bilge
1830	1832	1833	1837	1838	1839	1842
DC Multimeter w/SoC	DC Ammeter	DC Voltmeter	AC Voltmeter	AC Multimeter	Tank	Bilge
Monitors state-of-charge on one battery bank and voltage on three battery banks	Monitors current on two circuits	Monitors the voltage on up to four battery banks	Monitors voltage on two circuits or both legs of 120/240V	Monitors voltage, current, frequency, and power on two circuits or both legs of 120/240V	Monitors up to 4 tanks	Monitors up to 4 bilges
12V, 24V, 36V, 48V		12V, 24V, 36V, 48V				
0-70V		0-70V				
0.01V DC		0.01V DC				
+/- 1%		+/- 1%				
High / Low Voltage		High / Low Voltage				
8255 (500A / 50mV)	8255 (500A / 50mV)					
-500A to 500A	-500A to 500A					
+/- 2%	+/- 2%					
1A	1A					
0.1A	0.1A					
High Current, Low Battery	High Current					
	, and the second					
			40V-300V AC (RMS)	40V-300V AC (RMS)		
			+/- 1%	+/- 1%		
			1V AC	1V AC		
			High / Low Voltage	High / Low Voltage		
			mg zon ronage	mg zon ronage		
-			-	0–150A (300A optional)**		
				+/- 2%		
				1A		
				0.1A		
				8256 (150A / 50mA)		
				High Current		
				40Hz-90Hz		
				1Hz		
				High / Low Frequency		
				0W-45kW		
				10W		
				0.1kW		
-	-	-	-		North American, $240\Omega - 33\Omega$ European, $10\Omega - 180\Omega$ Blue Sea Systems Ultrasonic (1810, 1811) Custom Ranges to $300\Omega$	Works with bilge pumps with external float switches or automatic bilge pumps that indicate ON status via a 12V output
					Auto Calibration	
					4	4
					High / Low Levels	
-						Run time per hour, Cycles per 24-hour

144 METERING bluesea.com

# M2 OLED Vessel Systems Monitor (M2 VSM)

Performs comprehensive monitoring of four critical systems in one compact organic LED digital monitor

#### DC System Monitoring (up to two batteries)

One input monitors the DC voltage, state-of-charge, current for one battery bank and another input monitors the voltage of an additional battery bank. Alarms include high and low voltage, high current, and low battery.

#### **AC System Monitoring**

The VSM monitors a single AC voltage, current, and frequency. Alarms include high and low voltage, high current, and high and low frequency.

#### **Bilge & Tank Monitoring**

The M2 VSM has two inputs that can be configured as a bilge or tank monitor. When configured as a bilge input, monitoring functions include pump active, cycle count in the last 24-hours, average cycles in a typical 24-hour period, and total cycles. High alarms can be set for both the minutes of run time in the last hour as well as the number or cycle counts in the last 24-hours. When configured as a tank input, tank status can be represented in both capacity (gallons or liters) or as a percentage of capacity. Custom tank shapes can be auto-calibrated or programmed. Both high and low level alarms can be set for all tanks.

#### 1850 Retail Packaging Includes:

head unit, display cover, surface mount bezel, surface mount gasket, DC Current Shunt 8255, AC Current Transformer 8256, connectors, mounting screws and screw driver.

#### **Tank Senders Supported:**

10-180 Ω VDO

240-33 Ω Teleflex

Blue Sea Systems Ultrasonic Tank Senders (sold separately)

- For diesel, water, or waste 1810 (32" tank depth)
- For gasoline 1811 (24" tank depth)

See page 142 for specifications

# **TECH TIP**

#### State-of-Charge

#### **Battery State-of-Charge (SoC)**

Knowing the State-of-Charge of your battery is like knowing the amount of fuel in your gas tank. To avoid getting stranded with a dead battery, accurate battery bank monitoring is essential.

**Voltmeter Method**—Voltage can be used to measure the SoC of your battery. The difference from a fully charged battery to a fully discharged battery is only 1.0V in a 12V system, so the meter must have good resolution and accuracy. This method is generally sufficient to monitor batteries which experience intermittent use, such as starter or thruster batteries. However, a battery must not have been charged or discharged for over 12 hours for this measurement to be trustworthy. This makes the Voltmeter Method unsuitable for monitoring house batteries which charge and discharge often.

**Amp-Hour Method**—A convenient and accurate way to measure SoC is with an Amp-Hour Monitor. This is a complex calculation of the energy available, energy consumed, and energy returned to the battery during charging. SoC is commonly expressed as a percent of amp-hours remaining until the battery is empty, but can also be expressed as amp-hours used, amp-hours remaining, or time remaining. The advantage of this method is that it works well for batteries in a constant state of charge and discharge.









Part #	Description
1850	M2 VSM

#### **Connection Table**

System	Inputs	Functions
DC	2	DC Voltage Battery 1, State-of-Charge, & Current DC Voltage Battery 2
AC	1	AC Voltage, Current, & Frequency
Auxiliary	2	Auxiliary 1: Tank or Bilge Auxiliary 2: Tank or Bilge

#### **Ultrasonic Tank Senders**

Ultrasonic technology used to measure volume



Part #	Description		
1810	32" Diesel, Water, Waste tank sender		
1811	24" Gasoline tank sender		

bluesea.com METERING 145

#### **Mini OLED Meters**

Monitors essential electrical system parameters, temperature, and tank levels, on a bright, waterproof, daylight readable OLED screen

- Compact size enables mounting in any convenient location
- Now available with yellow or blue OLED screens
- · Reverse polarity protected
- Mounts in a common 1-1/8 in hole

Cutout Dimensions	1-1/8" (29 mm) diameter	
Lifecycles	Blue OLED: 10,000 hours Yellow OLED: 100,000 hours	

Part #	1733 1733200	1732 1732200	1741 1741200	1739 1739200
Description	Voltmeter	Ammeter	Temp Meter	Tank Meter
Nominal Voltage	12V / 24V DC	12V / 24V DC	12V / 24V DC	12V / 24V DC
Input Voltage	8V-36V DC	8V-36V DC	8V-36V DC	8V-36V DC
Max. Operating Current	15mA	15mA	10mA	17mA
Resolution	0.01V DC	0.1A	1°F or 1°C	5%
Accuracy	+/- 1%	+/- 2%	+/- 1.25%	
Intermittent: 5 min.		110A		
Cranking: 30 sec.		175A		
DC Shunt (included)		9230 (100A/50mV)		
Temp Sensor (included)			1820	
Monitors	8V –36V DC	-100A –100A DC	-40°F –175°F or (-40°C–80°C) *	Tank Level
Compatible Senders				North American: 240-33Ω European:
Regulatory	10-1800 CE marked, IP66 - protected against powerful water jets (see inside back cover)			

 $<sup>\</sup>star$  -40°F–250°F or (-40°C–120°C) with sensor 1821 (Optional)

### 5YEAR WARRANTY









#### **Mini Clamp Multimeter**

Compact and feature-rich AC/DC Multimeter simplifies diagnosis of marine electrical problems

- Clamp allows measurement of AC and DC current in wires without disturbing the circuits or contacting live terminals
- Compact size allows comfortable one hand operation, portability, and access to confined areas
- Auto range simplifies operation by automatically selecting the range that best fits the data
- Additional functions include: Data Hold, Overload Display, and AutoPower-Off
- True RMS AC measurement is accurate for normal sine wave and modified sine wave inverter output

Part #	8110
AC Amps	0.01-400A
AC Volts	0.001-600V
DC Amps	0.01-400A
DC Volts	0.001-600V
Resistance/Continuity Alarm	0.1-40ΜΩ
Measurement Resolution	4300 counts
Regulatory	CE marked, CAT III, 600 Volts



Includes test leads and carrying case

#### **Related Products**



DC Shunts page 149



Temperature Sensor page 149



Water-Resistant Accessory Panels page 26

146 METERING bluesea.com

#### **DC Digital Meters**




- Monitors key DC functions
- Large, bright LED characters
- · Three levels of brightness
- · Splash-proof front
- Easy to surface mount in a 2" round hole


Display Character Size	9/16"
Power Supply Voltage	8-50V DC
Max. Power Consumption	1.00W*
Min. Power Consumption	0.60W*

#### **Digital Meter Front Panel Mount**

Surface mounting features a finger nut and locking ring for quick and easy installation into a 2.00" (50.8mm) diameter hole.

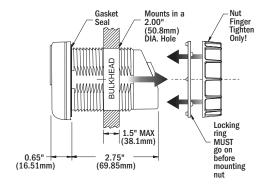

#### Dimensions





DC Multimeter with Alarm

Voltage Measurement			
Range	0-60V DC		
Resolution	0.01V DC		
Accuracy (% of Reading)	± 0.5%**		
<b>Current Measurement</b>			
Shunt (Included)	500A/50mV		
Range	± 500A DC		
Resolution (-100 to -500)	1A DC		
Resolution (-99.9 to +500)	0.1A DC		
Accuracy (% of Reading)	± 0.5%**		



Voltage Measurement	
Range	0-60V DC
Resolution	0.01V DC

Accuracy (% of Reading)



DC Voltmeter with Alarm

Voltage Measurement	
Range	0-60V DC
Resolution	0.01V DC
Accuracy (% of Reading)	± 0.5%**



**DC Ammeter** 

Shunt (Included)         500A/50mV           Range         ± 500A DC
D 1 1: (100) 500) 11 DC
Resolution (-100 to -500) 1A DC
Resolution (-99.9 to +500) 0.1A DC
Accuracy (% of Reading) ± 0.5%**

Part#	Description	Measurement	Sleep Mode	Alarms
8248	DC Multimeter with Alarm	Voltage, Current	Programmable	High and low voltage
8235	DC Voltmeter	Voltage	Manual	
8251	DC Voltmeter with Alarm	Voltage	Programmable	High and low voltage
8236	DC Ammeter	Current	Manual	High and low voltage

<sup>\*</sup> Variable with voltage, display intensity, segments illuminated, and sleep mode

#### **DC Digital Voltmeter Panels**

Enables voltage monitoring on up to 3 battery banks with one digital meter

- Includes 8235 DC Digital Voltmeter
- 4 digit LED display—Displays voltage from 0–60V DC
- 3 position switch for multiple battery banks

Part #	Width in (mm)	Height in (mm)
8051	5.25 (133.35)	3.75 (95.25)
1474	4.88 (123.83)	4.75 (120.65)





8051 1474

<sup>\*\*± 1 (</sup>Least Significant Digit)

#### **AC Digital Meters**



#### Monitors key AC functions

- Large, bright LED characters
- Three levels of brightness
- · Splash-proof front
- Easy to surface mount in a 2" round hole

Display Character Size	9/16"
Input Voltage	80-249V DC
Max. Power Consumption	1.00W*
Standby Power	0.60W*



#### **AC Ammeter**

Current Measurement		
Current Transformer	150A/50mA	
Range 1 (Resolution 0.01A)	0.00-9.99A AC (RMS)	
Range 2 (Resolution 0.1A)	10.0-150.0A AC (RMS)	
Accuracy (% of Reading)	± 3.0%***	



8247 AC Multimeter with Alarm

Voltage Measurement	
Range	80-249V AC*
Resolution	0.1V AC
Accuracy (% of Reading)	
90-249V AC (RMS)	± 2.0%***
70-90V AC (RMS)	± 5.0%***
<b>Current Measurement</b>	
Current Transformer	150A/50mA
Range 1 (Resolution 0.01A)	0.00-9.99A AC (RMS)
Range 2 (Resolution 0.1A)	10.0–150.0A AC (RMS)
Accuracy (% of Reading)	± 3.0%***
Frequency Measurement	
Range	40-90Hz
Resolution	0.1Hz
Accuracy (% of Reading) Calibrated with sine wave input	± 0.1%***
Power Measurement	
Range 1 (Resolution 10W)	0-9990W
Range 2 (Resolution 0.1kW)	10-45kW
Accuracy (% of Reading)	± 5%***

Included Current Transformer 8256 (page 149)

#### 120/240V AC Digital Meter Mounting Panel

For monitoring 120/240V AC Systems

- Use with AC Digital Multimeter 8247 for monitoring 120/240V AC Systems
- Monitor Line 1 or Line 2 to Neutral and Line 1 to Line 2 voltages
- Includes two additional Current Transformers 8256 (p.page 149) and mounting screws



8410 (meter not included) 120V/240V AC Digital Meter Blank Panel

Part #	Width in (mm)	Height in (mm)
8410	5.25 (133.35)	3.75 (95.25)

#### Analog and Digital Meter Mounting Panels

Provides an easy method of mounting meters

- Panel mounts standard 2-3/4" Analog or Digital Meters
- Includes mounting screws and center adjustment hole plug



8013 (meter not included)
Accepts (1) 2-3/4" Analog or Digital Meter



1475 (meter not included)
Accepts (1) 2-3/4" Analog or Digital Meter

Part #	Width in (mm)	Height in (mm)
1475	4.88 (123.83)	4.75 (120.65)
8013	5.25 (133.35)	3.75 (95.25)



#### **AC Voltmeter**

Voltage Measurement					
Range	80-249V AC*				
Resolution	0.1V AC				
Accuracy (% of Reading)					
90-249V AC (RMS)	± 2.0%***				
70-90V AC (RMS)	± 5.0%***				

Part #	Description	Measurement	Sleep Mode	Alarms
8238	AC Ammeter	Current	Manual	
8247	AC Multimeter with Alarm	Voltage, Current, Frequency, Power	Programmable	High and low voltage, High current
8237	AC Voltmeter	Voltage	Manual	

<sup>\*</sup> For 120 & 240 Volt AC single phase systems

<sup>\*\*</sup> Variable with voltage, display intensity, segments illuminated, and sleep mode

<sup>\*\*\* ± 5</sup> LSD (Least Significant Digit)

#### **Meter Comparison**











M2 OLED	Digital		Mini OLED	Analog Micro	Analog S	tandard
DC Voltmeter	DC Voltmeter		DC Voltmeters	DC Voltmeter	DC Voltmeter	
page 142	page 146		page 145	page 140	page 140	
1833	8235 8251*		1733 & 1733200	8028	8003	8240
0-70V	0-60V		8-36V	8-16V	8-16V	18-32V
4 channels	1 channel		1 channel	1 channel	1 cha	innel

<sup>\*</sup> with alarm















M2 OLED	Digital	Analog Micro			Analog S	Standard	M2 OLED	Digital	Mini OLED
AC Voltmeter	AC Voltmeter	AC Voltmeters			AC Volt	meters	AC Voltmeter	AC Voltmeter	AC Voltmeter
page 142	page 147	page 141			page	141	page 142	page 146	page 145
1837	8237	8244 8245 8246		9353	9354	1832	8236	1732 & 1732200	
50-250V	80-249V	0–150V 0–250V 0–50V			0-150V	0-250V	±500A	±500A	±100A
2 channels	1 channel	1 channel			1 cha	annel	2 channels	1 channel	1 channel





Analog Micro	Analog Standard						
DC Ammeter	DC Ammeters						
page 140	page 140						
8041	8005	8022	8017	8018	8019	8252	8253
0-50A	0-25A 0-50A 0-100A 0-150A 0-200A 50-0-50A 100-0-100A						
	1 channel						













Digital	Analog Standard		M2 OLED	M2 OLED	Mini OLED	Mini OLED
AC Ammeter	AC Ammeter		Bilge Monitor	Tank Monitor	Tank Monitors	Temperature Meters
page 147	page	e 141	page 142	page 142	page 145	page 145
8238	9630	8258	1842	1839	1739 & 1739200	1741 & 1741200
0-150A	0-50A	0-100A	Up to 4 bilges	Up to 4 tanks	1 tank	-40°C-120°C
1 channel	1 channel		4 channels	4 channels	1 channel	1 channel













M2 OLED	Digital	M2 OLED	D Digital M2 OLE		Mini Clamp
DC Multimeter w/SoC	DC Multimeter	AC Multimeter	AC Multimeter	AC/DC Multimeter	AC/DC Multimeter
page 142	page 146	page 142	page 147	page 142	page 145
1830	8248	1838	8247	1850	8110
12V, 24V, 36V, 48V 7–70V, ±500A	0-60V ±500A	50–300V, 0–150A, 40–90Hz, 0–45kW	80-249V, 0-150A 40-90Hz, 0-45kW	7-70V DC, ± 500A DC 40–300V AC, 0–150A AC Bilge, Tank, State-of-Charge	0.01–400A AC, 0.001–600V AC, 0.01–400A DC, 0.001–600V DC
3 x V DC channels 1 x A DC channel 1 x SoC channel	1 x V DC channel 1 x A DC channel	2 x V AC channels 2 x A AC channels	1 x V AC channel 1 x A AC channel	up to 5 channels	-

#### **DC Shunts**

#### Use with DC Ammeters

 For continuous operation, it is recommended that shunts not be run at more than two-thirds (66%) the rated current under normal conditions

Shunt Type	Resistive
Full Scale	50 mV
Amperage Max. Operating	66% of Rated Current
Amperage Int. (5 min.)	100% - Full scale rating
Amperage Int. (3 sec.)	300% - Full scale rating

Part #	For Use With:	Ratio
9228	Analog Ammeter	50A DC/50mV DC
9230	Analog Ammeter	100A DC/50mV DC
9231	Analog Ammeter	150A DC/50mV DC
9233	Analog Ammeter	200A DC/50mV DC
8255	Digital Ammeter	500A DC/50mV DC







# **Gauge Panel**For Round Gauges



(Gauge not included)

Part #	1510
Width in (mm)	4.88 (123.83)
Height in (mm)	4.75 (120.65)
Depth in (mm)	0.50 (12.70)

#### **Temperature Sensors**

Use with the P12 Battery Charger, M2 OLED Meters, M2 VSM, VSM 422, and Mini OLED Meters

• Installs with double-sided tape

Part #	1820	1821
Wire Size	16 AWG	16 AWG
Wire Length	12" (31 cm)	18" (46 cm)
IP Rating	IP68 Submersible	IP65 Non-submersible
Temperature Range	-40°F to 175°F (-40°C to 80°C)	-40°F to 300°F (-40°C to 150°C





#### **AC Current Transformers**

Use with AC Ammeters

Part #	For Use With:	Ratio
8073	Analog Ammeter	50A AC/50mA AC
8257	Analog Ammeter	100A AC/50mA AC
8256	Digital, M2 Ammeter & M2 VSM	150A AC/50mA AC
1829	M2 Ammeter	300A AC/50mA AC





#### **Related Products**



2719 Enclosure page 102



Mini OLED Digital Meters page 145



M2 OLED Digital Meters page 142



Digital Meters page 146



Mini Analog Meters page 140



Standard Analog Meters page 140

# **ACCESSORIES**

#### Floyd Bell Turbo Alarm

#### **Insulating Back Covers**

Adjustable extra loud volume and beep tone audibly alerts operator.

152



152

Provides electrical insulation for exposed panel backs.

#### **GFCI and 120V AC Dual Outlet**



153


Provides a 360 Panel System platform for mounting equipment, switching, and monitoring functions.

#### **LED Indicators**



153

Easy to install, available in an assortment of colors, and provide visual indication of power or alerts.

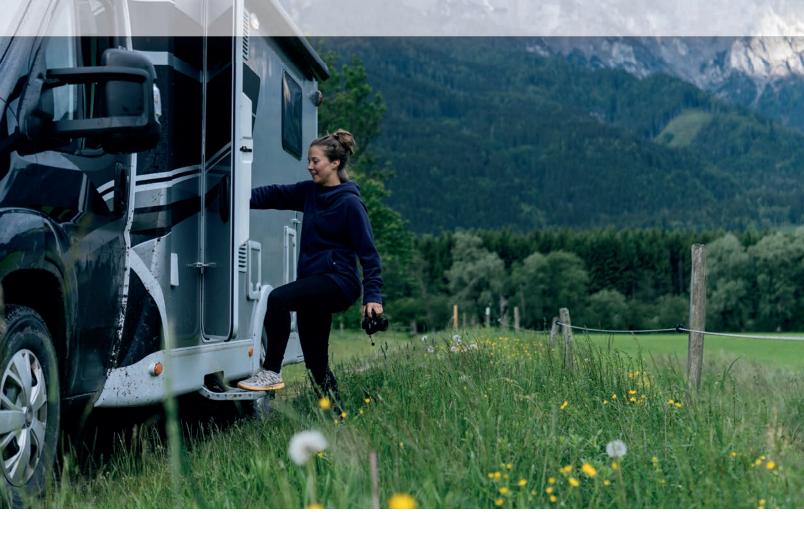

# **ACCESSORIES**

#### **Lockout Slides**



153

Enables safe management of multiple AC sources which use double or triple pole circuit breakers.

#### **Toggle Guard**



153

Protects toggle circuit breakers from accidental switching.

#### Labels







CABIN LIGHTS



Over 500 standard labels are available in large, small, square and round formats for use on Blue Sea Systems products including fuse blocks, busbar insulating covers, panels, switches and Contura switches. Custom Labels are available and can be easily ordered online at www.bluesea.com/labels.



#### Blue Sea Systems offers a range of panel accessories which support four panel styles.

ABYC standards mandate isolation of AC and DC components on combination panels. Stackable, screw-down covers protect AC components from coming into contact with tools, personnel, and DC wiring. Traditional Metal and 360 Panel System accessories include back covers for panels.

**ACCESSORIES** 152 bluesea.com

#### Floyd Bell Turbo Series **DC Audible Alarm**

Extra loud beep tone alerts operator



- · Rotating bezel adjusts alarm volume
- · Threaded attachment ring
- · Fits 1 inch round aperture

Part #	1070
Voltage Nominal	12V / 24V DC
Operating Voltage	5–30V DC
Operating Current	5 mA @ 5V DC 25 mA @ 30V DC
Sound Level @ 25°C and 24"	85±5 dB(A) @ 5V DC 103±5 dB(A) @ 30V DC
Operating Frequency	2900 ± 250 Hz
Terminals	Male 1/4" Quick Connect
Regulatory	IP68 - Withstands water submergence and dust exposure, UL Recognized

#### **Related Product**



m-LVD Low Voltage Disconnect page 40

#### **360 Panel Insulating Back Covers**

Provides electrical insulation for exposed panel backs



- Isolation of AC from DC components
- · Meets ABYC safety requirements for panels with combined AC and DC loads
- · Modular design of interlocking pieces can be stacked to accommodate large components
- · Cover breakouts allow wire access in any direction

Part #	1331
Modules	Cover for 1 module
Material	UL 94-V0 Polycarbonate
Hardware	2 qty. #6 Phillips-drive sheet metal screws, 4 qty. #8-32 x 0.5" Phillips-drive machine screws with lock washers

#### **AC Insulating Back Covers**

Provides electrical insulation for many of Blue Sea Systems Traditional Metal circuit breaker panels



Circuit Breaker Panel (p. 130)

- Isolation of panel AC components from DC components
- · Provides mechanical protection for panel backs
- · Lightweight material is easily drilled for wire pass-through
- · Meet ABYC safety requirements

Material UL-94-V0 Thermoplastic

4029 and 4031–Used only for Blue Sea Systems toggle panels

Part #	Description
4026	Cover for 5-1/4" x 3-3/4"
4027	Cover for 5-1/4" x 7-1/2"
4028	Cover for 10-1/2" x 7-1/2"
4029	Cover for 1 Column x 8 Position + Meter

#### 360 Panel 12V to 24V DC Conversion Kit

Converts indicator LEDs from 12V DC to 24V DC

Cover for 2 Column x 10 Position + Meter

- Requires one kit per 12V DC circuit breaker module
- Includes wire harness and panel identification label



Part #	4113
Description	360 Panel 12V to 24V DC Conversion Kit

#### 360 Panels

Provides a 360 Panel System platform for mounting equipment, switching, and monitoring functions

- 1518 is suitable for mounting accessories and for pad printing
- 1499 provides continuous ground fault protection and auto-monitoring





Part#	Panel Description	Width in (mm)	Height in (mm)	Depth in (mm)
1518	Blank	4.88 (123.83)	4.75 (120.65)	0.50 (12.70)
1479	120V AC Dual Outlet	4.88 (123.83)	4.75 (120.65)	1.00 (25.40)
1499	20A, 120V AC GFCI Dual Outlet	4.88 (123.83)	4.75 (120.65)	1.00 (25.40)

bluesea.com ACCESSORIES 153

#### **Marine Grade Dual GFCI Receptacle**

Weather and tamper resistant ground fault circuit interrupter reduces the risk of fire and shock hazards

- Delivers continuous ground fault protection
- Automatically self-tests to ensure it can respond feedback
- Status indicator light provides simple, intuitive feedback
- · Designed with stainless steel hardware
- · Designed with UV stabilized plastics



Part #	1698
Color	White
Voltage	125V AC
Amperage	20A
Trip Level	Class A, 5Ma ± 1Ma
Regulatory	UL 943 Class A, UL 498, CSA C22.2-144.1 & 42

#### **Related Product**



20A, 120V AC GFCI Dual Outlet 360 Panel, page 152

#### **LED Indicator Lights**

Directly replaces LEDs used in Blue Sea Systems Traditional Metal circuit breaker panels



- Simple push-in installation mounts in any thickness material
- · Useful as general indicator and alarm lights

Mounting Hole Size	11/64" (4.36 mm)
Wire Gauge	26 AWG

Part#	Color	Nominal Voltage	Current (mA)	Power Consumption (mW)	Circuit
8033	Amber	12 / 24V DC	1.5 @ 12V 3.1 @ 24V	19 @ 12V 75 @ 24V	Resistor
8171	Red	12 / 24V DC	1.5 @ 12V 3.2 @ 24V	19 @ 12V 77 @ 24V	Resistor
8172	Green	12 / 24V DC	1.5 @ 12V 3.0 @ 24V	19 @ 12V 73 @ 24V	Resistor
8169	Amber	120V AC	2.3 @ 120V	278 @ 120V	Resistor
8066	Red	120V AC	2.7 @ 120V	326 @ 120V	Resistor
8034	Green	120V AC	2.3 @ 120V	278 @ 120V	Resistor
8167	Amber	250V AC	1.1 @ 250V	276 @ 250V	Resistor + Diode
8166	Red	250V AC	1.1 @ 250V	276 @ 250V	Resistor + Diode
8134	Green	250V AC	1.1 @ 250V	276 @ 250V	Resistor + Diode

#### **C-Series Circuit Breaker Lockout Slide**

Enables safe management of multiple AC sources which use double or triple pole circuit breakers



#### 4130

- Allows only 1 of a pair of double pole or triple pole AC toggle circuit breakers to be activated at a time
- Ensures AC power from 2 sources will not be mixed
- Fits all double or triple pole C-Series Toggle Circuit Breakers (p. 84)
- · Uses circuit breaker mounting screw holes
- Includes mounting screws

Part #	4130	4131
Poles	2	3
AC Sources	2	2
Mounting	#6 Pan Head Screw	#6 Pan Head Screw

#### **A-Series Circuit Breaker Lockout Slide**

Enables safe management of multiple AC sources which use double pole circuit breakers



#### 4125

- Allows 1 double pole AC toggle circuit breaker to be activated
- Ensures AC power from 2 or more sources will not be mixed
- Fits all double pole A-Series Toggle Circuit Breakers (p. 82)
- · Uses circuit breaker mounting screw holes
- · Includes mounting screws

Part #	4125	4126
Poles	2	2
AC Sources	2	3
Mounting	#6 Flat Head Screw	#6 Flat Head Screw

#### **Toggle Guard**

Protects toggle circuit breakers from accidental switching

- Fits A-Series single pole toggle circuit breakers (p. 82)
- Fits all panel switches (p. 96)
- · Uses circuit breaker mounting screw holes
- Includes mounting screws



2 shown

Part #	4100
Mounting	#6 Flat Head Screw

154 ACCESSORIES bluesea.com


#### **Small Format Labels**

#### Reinforced, waterproof labels

 Used on most Blue Sea Systems Contura Switch Water Resistant Panels (p. 114) and ST-Blade Fuse Blocks (p. 62-67)

• For a list of labels included see (p. 155)

Part#	Color	Quantity
8214	Black	60 Labels
8217	Gray	60 Labels






#### **Square Format Labels**

#### Reinforced, waterproof labels

- Used on 360 Panels (p. 116, 118-136), Battery Management Panels (p. 38), ST CLB Circuit Breaker Blocks (p. 74), Surface Mount System (p. 88), and WeatherDeck® Panels (p. 115)
- For a list of labels included see (p. 155)
- Available for purchase in sets or individually (p. 156)

Part #	Color	Description	Quantity
4215	Black	DC Labels	30 Labels
4218	Black	DC Labels	30 Labels
4216	Black	DC Labels	60 Labels
4217	Black	DC Labels	120 Labels







#### **Large Format Labels**

#### Reinforced, waterproof labels

- Used on Contura Water-Resistant Fuse Panels 8053 & 8054 (p. 114)
- ST Glass Fuse Blocks (p. 61) and Traditional Metal Panels (p. 117-131)
- Available for purchase in sets or individually (p. 156-157)
- For a list of labels included see (p. 155)

Part#	Color	Description	Quantity
8031	Black	AC Panel Basic	30 Labels
8067	Black	AC Panel Extended	120 Labels
8030	Black	DC Panel Basic	30 Labels
8039	Black	DC Panel Extended	120 Labels





#### **Related Products**







page 95

●●●●● ○○○○ ●○○●● ○○● □○○○● ○○○● ○○●○● ●○○● ●●●●●

Push Button Switch Label Kit page 95

#### **Round Icon Labels**

#### Reinforced, waterproof labels

- Used on 15A Backlit Push Button Switches (p. 95)
- Also available in a kit Part # 4230 (p. 95)
- To order individual labels, please indicate the Part # 6526 and the label number. Example below.

#### Individual Example: Round Icon Individual 6526-1001



Label#	Description	Label	Label#	Description	Label
1001	ACCESSORY	ACC	1027	LIGHT 1	-0-
1002	ACCESSORY 1	ACC 1	1028	LIGHT ANCHOR	-(1)
1003	ACCESSORY 2	ACC 2	1029	LIGHT COURTESY	深
1004	ACCESSORY 3	ACC 3	1030	LIGHT COURTESY 1	深
1005	AERATOR		1031	LIGHT COURTESY 2	2
1006	ALARM		1032	LIGHT FLOOD BOW	R
1007	ANCHOR	<b>(†)</b>	1033	LIGHT FLOOD COCKPIT	(A)
1008	AUTO PILOT	AUTO PILOT	1034	LIGHT RUNNING	
1009	BATTERY SWITCH		1035	LIGHT SPREADER	
1010	BILGE BLOWER	<b>E</b>	1036	LIGHT SPREADER 2	Pill
1011	BILGE PUMP		1037	LIGHT UNDERWATER BOW	R
1012	BILGE PUMP 1		1038	LIGHT UNDERWATER STERN	R
1013	BILGE PUMP 2		1039	LIVEWELL	
1014	BILGE PUMP 3	3	1040	LIVEWELL 1	
1015	BLANK		1041	RADAR	
1016	DC OUTLET	DC OUTLET	1042	SASQUATCH	4
1017	DEPTH SOUNDER		1043	STEREO	
1018	ENGINE OFF		1044	THRUSTER	
1019	ENGINE START		1045	TRIM TAB	
1020	FAN	<b>B</b>	1046	VHF	
1021	FRESH WATER		1047	WASH DOWN	
1022	GPS		1048	WINDSHIELD WASHER	
1023	GYRO		1049	WINDSHIELD WIPER CENTER	
1024	HORN		1050	WINDSHIELD WIPER LEFT	(P)
1025	HOSE DOWN		1051	WINDSHIELD WIPER RIGHT	(P)
1026	LIGHT	-Ö-			

**ACCESSORIES** 155 bluesea.com

#### Labels Included in Sets

ACCESSORY AFRATOR ANCHOR LIGHT AUTOPILOT BAIT PUMP BILGE PUMP **BLOWER** CABIN LIGHTS DEPTH SOUNDER **ELECTRONICS** GPS HORN INSTRUMENTS KNOTMETER **NAV LIGHTS** RADAR REFRIGERATOR **RUNNING LIGHTS** SEARCH LIGHT SPARE SPREADER LIGHTS STEAMING LIGHT STEREO TRIM TABS VHE WASH DOWN WATER PRESSURE WATER PLIMP WINDLASS

#### 4206 and 8031

(BLANK) ACCESSORY AFT CABIN LIGHTS AFT CABIN OUTLETS AIR CONDITIONER AIR CONDITIONER 2
APPLIANCES BATTERY CHARGER CABIN OUTLETS COMPUTER ENTERTAINMENT CENTER FWD CABIN LIGHTS FWD CABIN OUTLETS GALLEY GALLEY OUTLETS HEATER INVERTER LIGHTS MACERATOR PUMP MAIN CABIN LIGHTS
MAIN CABIN OUTLETS MICROWAVE OUTLETS REFRIGERATOR SPARE STOVE TV/STEREO VCR WASHER/DRYER WATER HEATER

#### 4217

(BLANK) 12 VOLT DC 12 VOLT DC OUTLETS 24 VOLT DO AIR HORN ANCHOR LIGHT MAIN ANCHOR LIGHT MIZZEN ANCHOR WASH DOWN APPLIANCES ARCH LIGHTS AUTO/MAN BAITWELL BATTERY BATTERY PARALLEL BILGE ALARM BILGE PUMP 2
BILGE PUMP ON-OFF-AUTO BOW LIGHT BOW THRUSTER BRIDGE INSTRUMENTS **BRIDGE LIGHTS** CABIN CB RADIO CD PLAYER CHART LIGHT CHART PLOTTER COCKPIT LIGHTS COMPASS LIGHT COURTESY LIGHTS

DC OUTLETS DC SUB PANEL **DECK LIGHTS** DEFROSTER DEPTH/SPEED DIMMER DISCHARGE PUMP DOCKING LIGHT PORT DOCKING LIGHT STBD DOCKING LIGHTS DOWN RIGGER ELECTRIC HATCH ENGINE HATCH ENGINE INSTRUMENTS ENGINE ROOM BLOWER ENGINE ROOM LIGHTS **ENGINE SHUTDOWN** FAN FAN 2 FIRE ALARM FIRE EXT FISH FINDER FISHING LIGHT

FISHWELL PUMP

FLYBRIDGE LIGHTS

FLYBRIDGE FLYBRIDGE ELECTRONICS

FLOOD LIGHTS

FOG LIGHTS

FOREDECK LIGHT FRESH WATER PUMP FRESH WATER WASH DOWN FUEL PUMP FUEL TRANSFER FURI FR IIR FURLER MAINSAIL GALLEY GAS ALARM GPS/PLOTTER HAILER HAM RADIO HEAD HEATER IGNITION INSTRUMENT LIGHTS INTERCOM HAILER LIGHTER LIGHTS LIVEWELL LOCKER LIGHTS LPG CONTROL MAIN MAST LIGHTS MASTHEAD LIGHT MIZZEN FLOOD NAVIGATION ELECTRONICS NAVIGATION INSTRUMENTS NAV LIGHT ANCHOR OFF NAV

ON-OFF OUTLETS PUMP PUMPOUT RADIO ROD LOCKER RUDDER ANGLE INDICATOR SAILING CONTROLS SAILING INSTRUMENTS SALT WATER PLIMP SEAWATER WASH DOWN SHOWER SUMP PUMP SOLAR PANEL SSB START-STOP STERN LIGHT STROBE LIGHT SUMP PUMP TRANSFER TRICOLOR LIGHT TROLLING MOTOR WASHDOWN PUMP WASHDOWN WINCHES WIND GENERATOR WIND INSTRUMENTS WINDSHIELD WASHER WIPER CENTER WIPER STBD

#### 8214 and 8217

(BLANK) 12 VOLT DO 24 VOLT DC ACCESSORY AFRATOR ANCHOR LIGHT **AUTO PILOT** BAIT PUMP BAITWELL BATTERY BATTERY CHARGER BILGE BILGE PUMP BLOWER **BOW LIGHT** CABIN CABIN LIGHTS CB RADIO CELLULAR PHONE CHARGER INVERTER CHART PLOTTER DECK LIGHTS DEPTH SOUNDER DOWN RIGGER **ELECTRONICS** FAN FISH FINDER FISHING LIGHT FLOOD LIGHTS FUEL PUMP GAS ALARM **GPS** HORN IGNITION INSTR. LIGHTS INVERTER KNOT METER LIGHTS LIVEWELL NAV LIGHTS OUTLETS RADIO RADAR REFRIGERATION RUNNING LIGHTS SEARCH LIGHT SPREADER LIGHTS STEAMING LIGHT STEREO STROBE LIGHT TRICOLOR LIGHT TRIM TABS USB CHARGER WASH DOWN WATER PRESSURE WATER PUMP WINCHES WINDLASS

#### 4218

12 VOLT DC 24 VOLT DC ALARM BILGE PUMP BILGE PUMP 2 BILGE PUMP 3 BILGE PUMP 4 **BOW THRUSTER** CLOCK DC MAIN DC SUB PANEL FLECTRONICS **ENGINE ENGINES** ENG 1/ENG 2 GENERATOR HOUSE HOUSE/ENG HOUSE/GEN INVERTER LIGHTS MEMORY PORT/STBD ENG RADIO SOLAR PANEL VHF WINCH WINDLASS Blank (Write On)

#### 4205 and 8030

ACCESSORY ANCHOR LIGHT AUTOPILOT **BILGE PUMP BLOWER** COMPASS LIGHT **DEPTH SOUNDER FLECTRONICS** ENGINE INSTRUMENTS FOREDECK LIGHT FWD CABIN LIGHTS GPS HORN KNOTMETER LIGHTS MACERATOR PUMP MAIN CABIN LIGHTS RADAR REFRIGERATOR RUNNING LIGHTS SAILING INSTRUMENTS SPARE SPREADER LIGHTS STEAMING LIGHT STEREO STROBE LIGHT TRICOLOR LIGHT VHF WATER PRESSURE

#### 4216 (BLANK)

12 VOLT DC

BAITWELL

BATTERY

BILGE

CARIN

12 VOLT DC OUTLETS

ANCHOR WASH DOWN

BILGE PUMP ON-OFF-AUTO

BATTERY PARALLEL

BILGE PUMP 2

BOW LIGHT

CB RADIO CELLULAR PHONE CHART LIGHT CHART PLOTTER COCKPIT LIGHTS COMPASS LIGHT **COURTESY LIGHTS** DAVIT DC OUTLETS DC SUB PANEL DECK LIGHTS DOCKING LIGHTS DOWN RIGGER ELECTRIC HATCH ENGINE ROOM BLOWER ENGINE ROOM LIGHTS FAN FISH FINDER FISHING LIGHT FISHWELL PUMP FLOOD LIGHTS FRESH WATER PUMP FUEL PUMP GALLEY OUTLETS GAS ALARM GPS/PLOTTER HEAD IGNITION INSTRUMENT LIGHTS LIGHTS LIVEWELL MACERATOR PUMP NAV LIGHT ANCHOR-OFF-NAV OUTLETS PUMPOUT RADIO SEAWATER WASH DOWN SHOWER SUMP PUMP SSR STERN LIGHT STROBE LIGHT TRICOLOR LIGHT TROLLING MOTOR WASHDOWN WATER MAKER WIPER PORT

WIPER STBD

4207 and 8039 (BLANK) 12 VOLT DO DECK LIGHTS EWD DEPTH RECORDER 12 VOLT DC OUTLETS AFT CABIN DEPTH/SPEED DESALINATOR AFT HEAD DIMMER DINING AREA LIGHTS ALARM SYSTEM DOCKING LIGHTS EMERGENCY LIGHTS ANCHOR WASH DOWN BAIT PUMP BILGE ALARM ENGINE ROOM BILGE ALARM BILGE PLIMP 2 ENGINE ROOM LIGHTS BRIDGE INSTRUMENTS CABIN 2 LIGHTS ENGINE ALARM CABIN 3 LIGHTS EXTERIOR LIGHTS CABIN 4 LIGHTS FAN 2 CABIN FANS FIRE ALARM FISHING LIGHT FLOOD LIGHTS CABIN LIGHTS CB RADIO CELLULAR PHONE CHART LIGHT FLYBRIDGE ELECTRONICS FLYBRIDGE LIGHTS CHART PLOTTER FRESH WATER PUMP COCKPIT LIGHTS COLOR SOUNDER COMM ELECTRONICS FRESH WATER WASH DOWN GALLEY LIGHTS
GPS/PLOTTER DC LIGHTS HAILER HAM RADIO DC MAIN DC OUTLETS DC REFRIGERATOR HEAD HEAD LIGHTS DC SUB PANEL HEAD LIGHTS 2 DECK LIGHTS HEATER 2 DECK LIGHTS AFT HELM ELECTRONICS

HELM GALIGES HELM INSTRUMENTS HIGH WATER ALARM HOLDING TANK HOLDING TANK ALARM HOLDING TANK PUMP INSTRUMENT LIGHTS INSTRUMENTS INTERCOM INTERIOR LIGHTS ENGINE ROOM PANEL MAIN LIGHTS 2 LIVEWELL LOG LORAN MAIN CABIN MAP LIGHT MAST LIGHTS NAV STATION ELECTRONICS NAV STATION GAUGES NAV STATION INSTRUMENTS NAV STATION LIGHTS NAVIGATION ELECTRONICS NAVIGATION INSTRUMENTS NAVIGATION LIGHTS RACK LIGHTS SALOON SALOON LIGHTS SAT/COM

SATELLITE DISH SEARCHLIGHT SEAWATER TEMP SEAWATER WASH DOWN SECURITY SYSTEM SHOWER SUMP PUMP SONAR SPEED/LOG SSB SUB PANEL SUMP PUMP TELEPHONE SYSTEM TRACK LIGHTS TRANSFER PUMP TRIM TABS TV/VCR UTILITY VIDEO PLOTTER WATER ALARM WATER MAKER WEATHER FAX WEATHER INSTRUMENT WINCHES WIND INSTRUMENTS WINDEX LIGHT WIPER PORT WIPER STRD WIPERS

#### 4208 and 8067

GENERATOR 1

(BLANK) CABIN HEATER 120 VOLT AC OLITI ETS CABIN LIGHTS CHARGER/INVERTER 120 VOLTS AC / 60 HZ AC COMPRESSOR AC FAN COCKPIT LIGHTS
COCKPIT REFRIGERATOR AC MAIN COMPARTMENT LIGHT AC PANEL COOKTOP AC POWER AC REFRIGERATOR DECK LIGHTS DIMMER AC SUB PANEL DINING AREA LIGHTS AFT CABIN **DINING AREA OUTLETS** DISHWASHER AIR CONDITIONER 3 DISPOSAL AIR CONDITIONER 4 DRYER EMERGENCY LIGHTS ALARM SYSTEM AMPLIFIER ENGINE ROOM LIGHTS AUDIO/VIDEO SYSTEM BATTERY CHARGER 2 ENGINE ROOM OUTLETS EXHAUST FAN BRIDGE LIGHTS BRIDGE OUTLETS **EXTERIOR LIGHTS** FAN CABIN FAN 2 CABIN 2 FAN 3 CABIN 2 LIGHTS FAN 4 FLOOD LIGHTS CABIN 2 OUTLETS CABIN 3 FREEZER CABIN 3 LIGHTS FURNACE CABIN 3 OUTLETS GALLEY APPLIANCES GALLEY LIGHTS
GARBAGE DISPOSAL CARIN 4

CABIN 4 LIGHTS

CABIN 4 OUTLETS

**GFI OUTLET** HALLWAY LIGHTS HEAD 2 OUTLETS HEAD 3 OUTLETS HEAD 4 OUTLETS HEAD LIGHTS HEAD LIGHTS 2 HEAD LIGHTS 3 HEAD LIGHTS 4 HEAD OUTLETS HEADLIGHTS HEATER 3 HEATER 4 HOOD FAN ICEMAKER INTERIOR LIGHTS INVERTER OUTLET ISOLATION TRANSFORMER LAZARETTE LIGHTS **LECTRASAN** LIGHTS 2 LIGHTS 3 LIGHTS 4 LIGHTS AFT LIGHTS FWD MAIN MAIN BREAKER MAIN CABIN NAV STATION LIGHTS

**OUTLETS 2** OUTLETS 3 OUTLETS 4 OUTLETS DECK OUTLETS EXTERIOR OUTLETS INTERIOR **RACK OUTLETS** RANGE REFRIGERATOR/FREEZER REVERSE POLARITY SALOON SALOON HEATER SALOON LIGHTS SALOON OUTLETS SATELLITE DISH SHORE SHORE POWER STEREO STOVE/MICROWAVE SUB PANEL TELEPHONE SYSTEM TRACK LIGHTS TRASH COMPACTOR TV UPS SYSTEM VACUUM VIDEO SYSTEM WASHER

WATER MAKER

#### included with **Source Selection Panels**

WIPERS

Lahel set

(not sold separately)

Blank WRITE-ON INVERTER SHORE SHORE 1 SHORE 2 AC BUS 1 GENERATOR GENERATOR 1 **GENERATOR 2** 

156 **ACCESSORIES** bluesea.com

# Individual Square and Large Format Panel Labels To order individual labels, please indicate the Part # (6520 or 8063) and the Label Part #.

Label Part #	Label Text	Label Part #	Label Text	Label Part #	Label Text	Label Part #	Label Text
0001	LABEL #1	0485	BEDROOM SLIDEOUT	0125	DECK LIGHTS AFT	0189	FISHING LIGHT
0002	LABEL #2	0055	BILGE	0126	DECK LIGHTS FWD	0487	FISHWELL PUMP
0003	(BLANK)	0056	BILGE ALARM	0127	DECK LIGHTS PORT	0488	FISHWELL PUMP 2
0005	12 VOLT DC	0057	BILGE ALARM 2	0128	DECK LIGHTS STBD	0576	FLOAT SWITCH
0004	12 VOLT DC OUTLETS	0058	BILGE ALARM 3	0129	DEFROSTER	0190	FLOOD LIGHTS
0499	12 VOLT OUTLETS INSIDE	0059	BILGE ALARM 4	0130	DEPTH RECORDER	0191	FLOSCAN
0500	12 VOLT OUTLETS OUTSIDE	0060	BILGE LIGHTS	0131	DEPTH SOUNDER	0192	FLYBRIDGE FLYBRIDGE FLECTRONICS
0502 0007	120 VOLT / 60 HZ SHORE POWER 120 VOLT AC / 60 HZ	0061 0062	BILGE PUMP BILGE PUMP 2	0132 0133	DEPTH/SPEED DESALINATOR	0193 0194	FLYBRIDGE ELECTRONICS FLYBRIDGE LIGHTS
0007	120 VOLT AC 7 00 112 120 VOLT AC OUTLETS	0063	BILGE PUMP 3	0133	DIMMER	0195	FLYBRIDGE OUTLETS
0516	120/240V 60 HZ	0064	BILGE PUMP 4	0135	DINING AREA LIGHTS	0196	FOG LIGHTS
0517	120/240V 60 HZ SHORE POWER	0453	BILGE PUMP ON-OFF-AUTO	0136	DINING AREA OUTLETS	0197	FOREDECK LIGHT
0526	230 VOLTS AC 50 HZ	0559	BLANK WHITE WRITABLE	0137	DISCHARGE PUMP	0539	FORWARD BILGE
0010	24 VOLT DC	0065	BLOWER	0567	DISCHARGE PUMP 2	0198	FREEZER
0009	24 VOLT DC OUTLET	0066	BOAT DAVIT	0568	DISCHARGE PUMP 3	0199	FRESH WATER
8000	240 VOLTS AC	0067	BOOM LIGHT	0138	DISHWASHER	0200	FRESH WATER PUMP
0460	240 VOLTS AC / 60 HZ	0068	BOW LIGHT	0139	DISPOSAL	0201	FRESH WATER PUMP 2
0515	250 VOLT 50HZ SHORE POWER	0069	BOW THRUSTER	0140	DIVE COMPRESSOR	0202	FRESH WATER PUMP 3
0468	250 VOLTS AC / 50 HZ	0070	BRIDGE	0141	DOCKING LIGHT PORT	0203	FRESH WATER PUMP 4
0462	AC COMPRESSOR	0071	BRIDGE INSTRUMENTS	0142	DOCKING LIGHT STBD	0204	FRESH WATER WASH DOWN
0011 0012	AC COMPRESSOR AC FAN	0072 0073	BRIDGE LIGHTS BRIDGE OUTLETS	0143 0144	DOCKING LIGHTS DOWN RIGGER	0482 0561	FRONT SLIDEOUT FUEL GAUGE
0012	AC MAIN	0073	CABIN	0144	DRYER	0205	FUEL PRIMER PUMP
0013	AC PANEL	0074	CABIN 2	0145	DUMP VALVES	0205	FUEL PUMP
0015	AC POWER	0501	CABIN 2 FAN	0566	ECU	0207	FUEL PUMP 2
0016	AC REFRIGERATOR	0076	CABIN 2 LIGHTS	0580	ELCI	0208	FUEL PUMP 3
0017	AC SUB PANEL	0077	CABIN 2 OUTLETS	0147	ELECTRIC HATCH	0209	FUEL PUMP 4
0532	ACCENT LIGHT	0078	CABIN 3	0469	ELECTRONIC CONTROL UNIT	0210	FUEL TANK HEATER
0018	ACCESSORY	0079	CABIN 3 LIGHTS	0148	ELECTRONICS	0211	FUEL TRANSFER
0019	ADF	0800	CABIN 3 OUTLETS	0149	EMERGENCY BACKUP SYS	0507	FUME DETECTOR
0020	AERATOR	0081	CABIN 4	0150	EMERGENCY LIGHTS	0212	FURLER JIB
0021	AFT CABIN	0082	CABIN 4 LIGHTS	0151	EMERGENCY PUMPS	0213	FURLER MAINSAIL
0022	AFT CABIN LIGHTS	0083	CABIN 4 OUTLETS	0545	ENGINE	0214	FURLER SPINNAKER
0023 0536	AFT CABIN OUTLETS AFT CABIN SUMP	0084	CABIN FAN	0581 0582	ENGINE 1 ENGINE 2	0215 0216	FURNACE FWD CABIN
0530	AFT DISCHARGE PUMP	0085 0086	CABIN HEATER CABIN LIGHTS	0582	ENG 1/ENG 2	0216	FWD CABIN LIGHTS
0024	AFT HEAD	0087	CABIN OUTLETS	0158	ENGINE ALARM	0217	FWD CABIN OUTLETS
0025	AIR COMPRESSOR	0088	CABLEMASTER	0159	ENGINE BLOCK HEATER	0529	FWD DISCHARGE PUMP
0026	AIR CONDITIONER	0089	CASSETTE PLAYER	0160	ENGINE CONTROL PORT	0528	FWD HEAD
0027	AIR CONDITIONER 2	0090	CB RADIO	0161	ENGINE CONTROL STBD	0219	GALLEY
0028	AIR CONDITIONER 3	0091	CCTV	0162	ENGINE CONTROLS	0220	GALLEY APPLIANCES
0029	AIR CONDITIONER 4	0092	CD PLAYER	0163	ENGINE DRIVEN REFRIG	0221	GALLEY DRAIN
0030	AIR CONDITIONER PUMP	0093	CELLULAR PHONE	0164	ENGINE EXHAUST FAN	0222	GALLEY FAN
0031	AIR HORN	0537	CENTER LIVEWELL	0165	ENGINE HATCH	0223	GALLEY LIGHTS
0573	AIS	0094	CHARGER/INVERTER	0166	ENGINE HEATER PORT	0224	GALLEY OUTLETS
0544 0032	ALARM	0095 0096	CHART DI OTTER	0167	ENGINE HEATER STBD	0490 0225	GALVANIC ISOLATOR
0461	ALARM SYSTEM ALTERNATOR	0090	CHART PLOTTER CHOKE	0168 0169	ENGINE INSTRUMENTS ENGINE OIL PAN PUMP	0225	GARBAGE DISPOSAL GAS ALARM
0033	ALTERNATOR DISCONNECT	0098	CIRCULATOR PUMP	0152	ENGINE ROOM BILGE ALARM	0227	GENERAL PURPOSE
0034	AMPLIFIER	0508	CLOCK	0153	ENGINE ROOM BLOWER	0523	GENERATOR
0035	ANCHOR LIGHT	0099	CLOSET LIGHT	0154	ENGINE ROOM HEATER	0228	GENERATOR 1
0036	ANCHOR LIGHT MAIN	0575	CO DETECTOR	0155	ENGINE ROOM LIGHTS	0229	GENERATOR 2
0037	ANCHOR LIGHT MIZZEN	0100	COCKPIT LIGHTS	0156	ENGINE ROOM OUTLETS	0454	GENERATOR OFF ON START
0038	ANCHOR WASH DOWN	0101	COCKPIT REFRIG	0157	ENGINE ROOM PANEL MAIN	0230	GENERATOR ROOM BLOWER
0039	APPLIANCES	0102	COLOR SOUNDER	0170	ENGINE SHUTDOWN	0466	GENERATOR RUNNING
0040	ARCH LIGHTS	0103	COMM ELECTRONICS	0171	ENGINE TEMP	0455	GENERATOR STOP
0041	AUTO FILL	0104	COMPARTMENT HEATER	0546	ENGINES CENTER	0578	GFCI
0525	AUTO FILL	0105	COMPARTMENT LIGHT	0172	ENTERTAINMENT CENTER	0231	GFI OUTLET
0042 0555	AUTO/MANUAL AUTO/MAN	0106 0107	COMPASS LIGHT COMPUTER	0173 0174	ENTRANCE DOOR ENTRY STEP	0232 0233	GPS GPS/LORAN
0524	AUTOMATIC CHARGING RELAY	0514	COMPUTER DISPLAY	0174	EXHAUST FAN	0233	GPS/PLOTTER
0043	AUTOPILOT	0108	CONDENSER PUMP	0175	EXHAUST TEMP	0510	GUN LOCKS
0044	BAIT PUMP	0109	CONSOLE LIGHT	0177	EXTERIOR	0235	GYRO COMPASS
0045	BAITWELL	0110	CONVERTER	0178	EXTERIOR LIGHTS	0236	HAILER
0046	BALLAST CONTROLS	0111	COOKING GRILL	0179	FAN	0237	HALLWAY LIGHTS
0047	BALLAST PUMP	0112	COOKTOP	0180	FAN 2	0238	HALON FIRE SYSTEM
0048	BAR	0113	COOLING PUMP	0181	FAN 3	0239	HAM RADIO
0481	BATHROOM	0114	COURTESY LIGHTS	0182	FAN 4	0240	HEAD
0049	BATTERY 1	0115	CREW LIGHTS	0183	FAX	0241	HEAD 2
0473	BATTERY 1	0116	CREW QUARTERS	0184	FILLING PUMP	0242	HEAD 2 FAN
0474 0050	BATTERY 2 BATTERY CHARGER	0117 0118	DAVIT DC LIGHTS	0185 0186	FIRE ALARM FIRE EXT	0243 0244	HEAD 2 OUTLETS HEAD 3
0050	BATTERY CHARGER BATTERY CHARGER 2	0118	DC MAIN	0186	FIRE HORN	0244	HEAD 3 FAN
0051	BATTERY CHARGER 2 BATTERY COMPARTMENT	0119	DC OUTLETS	0459	FISH FINDER	0245	HEAD 3 OUTLETS
0053	BATTERY PARALLEL	0120	DC REFRIGERATOR	0538	FISHBOX DRAIN	0247	HEAD 4
0560	BATTERY SWITCH	0121	DC SUB PANEL	0188	FISHBOX ICEMAKER	0248	HEAD 4 FAN
0054	BEACON	0123	DECK	0520	FISHBOX PUMP	0249	HEAD 4 OUTLETS
	BEDROOM	0124	DECK LIGHTS	0521	FISHBOX REFRIGERATOR	0250	HEAD FAN

bluesea.com ACCESSORIES 157

#### Example:

Square Format 6520-0044



Large Format 8063-0356

REFRIGERATOR

Label Part #	Label Text	Label Part #	Label Text	Label Part #	Label Text
0251	HEAD LIGHTS	0311	MAIN CABIN	0367	SALOON LIGHTS
)252	HEAD LIGHTS 2	0312	MAIN CABIN LIGHTS	0368	SALOON OUTLETS
253	HEAD LIGHTS 3	0313	MAIN CABIN OUTLETS	0369	SALT WATER PUMP
254	HEAD LIGHTS 4	0314	MAIN SAIL FURLING	0370	SAT/COM
255	HEAD OUTLETS	0315	MAP LIGHT	0371	SAT/NAV
256	HEADLIGHTS	0572	MARINE SANITATION DEVICE	0372	SATELLITE DISH
257	HEATER	0316	MAST LIGHTS	0373	SCRUBBER
519	HEATER & AIR CONDITIONER	0317	MASTHEAD LIGHT	0374	SEARCHLIGHT
258	HEATER 2	0551	MEMORY	0375	SEARCHLIGHT HAND HELD
259	HEATER 3	0574	MERCATHODE	0376	SEARCHLIGHT REMOTE
260	HEATER 4	0318	MICROWAVE	0377	SEAWATER TEMP
261	HELM ELECTRONICS	0319	MINI DISC PLAYER	0378	SEAWATER WASH DOWN
0262	HELM GAUGES	0320	MIZZEN FLOOD	0379	SECURITY SYSTEM
0263	HELM INSTRUMENTS	0456	NAV LIGHT ANCHOR OFF NAV	0380	SHIP
0264	HIGH WATER ALARM	0321	NAV STATION ELECTRONICS	0381	SHORE
0265	HOLDING TANK	0322	NAV STATION GAUGES	0463	SHORE 1
0266	HOLDING TANK ALARM	0323	NAV STATION INSTRUMENTS	0464	SHORE 2
0267	HOLDING TANK PUMP	0324	NAV STATION LIGHTS	0382	SHORE CORD REEL
0268	HOOD FAN	0325	NAVIGATION ELECTRONICS	0383	SHORE POWER
0269	HOOD LIGHT	0325	NAVIGATION INSTRUMENTS	0384	SHORE POWER CORD
0270	HORN	0327	NAVIGATION LIGHTS	0385	SHOWER SUMP PUMP
)475	HOT TUB	0565	NETWORK	0386	SINK DRAIN
0475	HOT WATER PUMP	0328	NIGHT LIGHTS		
				0486	SLIDEOUT
0548	HOUSE/ENC	0329	OFF	0387	SOLAR PANEL
0549	HOUSE/ENG	0331	OIL CHANGE PUMP	0388	SONAR
0550	HOUSE/GEN	0563	OIL GAUGE	0542	SONAR/ACC
0272	HYDRAULIC SYSTEM	0332	ON	0389	SPARE
0273	HYDRAULIC SYSTEM	0330	ON-OFF	0390	SPEED/LOG
0274	HYDRAULIC TANK ALARM	0333	OUTLETS	0391	SPREADER LIGHTS
0570	HYDRAULIC VALVE	0334	OUTLETS 2	0392	SPREADER LT MIZZEN
0275	ICE MAKER	0335	OUTLETS 3	0393	SSB
0276	IGNITION	0336	OUTLETS 4	0394	STABILIZER
0277	IGNITION PORT	0505	OUTLETS AFT	0558	STAIR LIGHT
0278	IGNITION STBD	0337	OUTLETS DECK	0395	STARBOARD
0279	INSTRUMENT LIGHTS	0506	OUTLETS ENGINE ROOM	0396	START
0280	INSTRUMENTS	0338	OUTLETS EXTERIOR	0398	START PORT
0281	INTERCOM	0503	OUTLETS FORWARD	0399	START STBD
0282	INTERCOM HAILER	0339	OUTLETS INTERIOR	0397	START-STOP
0283	INTERCOM/TELEPHONE	0504	OUTLETS PILOT HOUSE	0541	STBD FISHBOX
0284	INTERIOR LIGHTS	0458	PANEL LIGHTS	0533	STBD LIVEWELL
0556	INTERNET	0496	PILOT HOUSE FAN	0400	STBD THRUSTER
0285	INVERTER	0340	PORT	0401	STEAMING LIGHT
0467	INVERTER 2	0540	PORT FISHBOX	0569	STEERING VALVE
0476	INVERTER AC BUS	0534	PORT LIVEWELL	0402	STEP LIGHT
0471	INVERTER AC SUPPLY	0341	PORT THRUSTER	0403	STEREO
0470	INVERTER DC SUPPLY	0552	PORT/STBD ENG	0577	STEREO MEMORY
0286	INVERTER OUTLET	0342	POWER	0404	STERN LIGHT
0287	ISOLATION TRANSFORMER	0343	POWER WASHER	0509	STERN THRUSTER
0479	KITCHEN	0457	PRE-HEAT	0405	STOP
0484	KITCHEN SLIDEOUT	0344	PRIMARY WINCHES	0406	STOVE
0288	KNOTMETER	0345	PRINTER	0407	STOVE/MICROWAVE
0289	LAZARETTE LIGHTS	0346	PUMP	0408	STROBE LIGHT
0290	LECTRASAN	0497	PUMP BLACK WATER	0409	SUB PANEL
0290	LIGHTER	0497	PUMP GRAY WATER	0409	SUMP PUMP
0291	LIGHTS	0554	PUMPOUT	0410	SUMP PUMP 2
0292	LIGHTS 2	0334	RACK LIGHTS	0411	SYNCHRO
0293	LIGHTS 3	0347	RACK DUTLETS	0564	TANK GAUGE
0295	LIGHTS 4	0348	RADAR	0564	TAPE DECK
0295	LIGHTS 4	0349	RADAR ARCH LIGHTS	0413	TELEPHONE SYSTEM
			RADIO		
0494	LIGHTS AFT CABIN	0351		0415	TEST
0297	LIGHTS FWD	0352	RANGE	0416	TOWING LIGHTS
0493	LIGHTS MASTER CABIN	0579	RCBO	0417	TRACK LIGHTS
0495	LIGHTS PANTRY	0353	RDF	0465	TRANSFER
0492	LIGHTS PILOTHOUSE	0483	REAR SLIDEOUT	0418	TRANSFER PUMP
0298	LIGHTS PORT	0354	RECEIVER	0419	TRANSFORMER
0491	LIGHTS SETTEE	0355	RECEPTACLE	0518	TRANSFORMER SECONDAR
0299	LIGHTS STBD	0356	REFRIGERATOR	0420	TRASH COMPACTOR
0300	LIVEWELL	0357	REFRIGERATOR PUMP	0478	TRAVEL LOCKS
0301	LIVEWELL INPUT	0358	REFRIGERATOR/FREEZER	0421	TRICOLOR LIGHT
0302	LIVEWELL OUTPUT	0359	REGULATOR	0422	TRIM TABS
0303	LOCKER LIGHTS	0360	REVERSE POLARITY	0527	TROLLING MOTOR
0304	LOG	0361	ROD LOCKER	0423	TV
0305	LORAN	0489	RUDDER ANGLE INDICATOR	0424	TV ANTENNA
0306	LPG CONTROL	0362	RUNNING LIGHTS	0425	TV/STEREO
0307	LUBE OIL PUMP	0363	SAILING CONTROLS	0426	TV/VCR
0308	MACERATOR PUMP	0364	SAILING INSTRUMENTS	0535	UNDERWATER LIGHT
0309	MAIN	0365	SALOON	0427	UPS SYSTEM
	MAIN BREAKER	0366	SALOON HEATER	0427	UTILITY

Label Part #	Label Text
0429	VACUUM
0430	VACUUM PUMP
0431	VCR
0432	VHF
0511	VHF 1
0512	VHF 2
0433	VIDEO PLOTTER
0434	VIDEO SYSTEM
0543	WASHDOWN
0513	WASHDOWN PUMP
0435	WASHER
0436	WASHER/DRYER
0437	WATER ALARM
0562	WATER GAUGE
0438	WATER HEATER
0439	WATER LEVEL
0440	WATER MAKER
0441	WATER PRESSURE
0442	WATER PUMP
0443	WEATHER FAX
0444	WEATHER INSTRUMENT
0571	WIFI
0553	WINCH
0445	WINCHES
0477	WIND GENERATOR
0446	WIND INSTRUMENTS
0522	WIND SHIELD VENT
0447	WINDEX LIGHT
0448	WINDLASS
0449	WINDSHIELD WASHER
0472	WIPER CENTER
0450	WIPER PORT
0451	WIPER STBD
0452	WIPERS
0557	WIRELESS


158 ACCESSORIES bluesea.com

#### **Emergency Vehicle Label Set**

#### For emergency vehicles

- 180 Reinforced, waterproof labels
- · Used on all ST-Blade Fuse Blocks

Part #	7870
Color	Black
Quantity	180 Labels



#### **Related Products**



ST-Blade Fuse Blocks pages 62-67

# CAMERA CA

#### **Labels Included**

ON/OFF
12V SOCKET
12V SOCKET 1
12V SOCKET 2
A/H
AIR COMP
AIR HORN
AIREL
ALARM
ALLEY LIGHTS
ALPR
AMBER
AMP METER
AREA
AUX
AUX 1
AUX 2
AUX 3
BACK UP
BLUE
BOX
BRAKE
CAB
CABINET LIGHTS
CAMERA 1
CAMERA 2
CENTER
CLEAR
COMPUTER
COOL
CORNER
CORNER STROBE
CRUISE
DECK
DIM
DIRECTNL ARROW
DOME
DOME HI/LOW
DOME LIGHT
DOOR
EMERG
EXHAUST VENT
FAN HI/LOW
FAST
FLASH

FLOOD
FOG
FRONT
FRONT CUT
FRONT FLASH
FRONT FLOOD
FRONT ILS
FRONT LT BAR
FRONT OSC
FRONT ROT
FRONT STROBE
GREEN
GRILL
GUN LOCK
HAND-HELD
HAZARD
HEADLT FLASH
HEAT
HEAT/AC ON/OFF
HEAT/AC SELECT
HI-IDL
HI-LOW
HORN
HORN 1
HORN SIREN
IGN RELAY
INFRARED
INTER
IOG
JOG LEFT
JOG RIGHT
LED
LED 1
LED 2
LED 3
LED 4
LEFT
LEFT ALLEY
LEFT ARROW
LEFT DOME
LEFT FLOOD
LEFT SCENE
LIGHT
LIGHT 1

FLASH LIGHT

LIGHT 2 LOAD SHED LOCK LOW POWER LOWER LVD MAN MAP LIGHT MDC MESSAGE BOARD MODEM MONITOR MONITOR 1 MONITOR 2 OSC PA PATIENT DOME PERIMETER PERIMETER 1 PERIMETER 2 PRIM PRIORITY **PURSUIT** Q SIR RADAR RADIO RADIO 1 RADIO 2 RADIO 3 RADIO CHARGER RAPID FLASH REAR CUT REAR FLASH REAR FLOOD REAR ILS REAR OSC REAR SCENE REAR STROBE RED RELAY RESET RIGHT RIGHT ALLEY

RIGHT ARROW

RIGHT DOME RIGHT FLOOD RIGHT SCENE RISER RMBLR ROT SCENE SCENE LIGHT SEARCH LIGHT SEC SIDE SLOW SPEED SM SPOT START STOP STEP STROBE SUCTION ON/OFF SURE EJECT TAIL TAKE DOWN TAP II TCL TEMP METER THERMAL CAMERA TIMER TONE TOW TRAFFIC TRUNK UPPER USB USB 1 USB 2 USB 3 **VIDEO** VIDEO CAMERA **VOLT METER** WAIL WARN WARNING WHT LT CUT WIG WAG WORK YELP

#### **Circuit Identification Label Kit**

Used on Blue Sea Systems Battery Switches

- · Reinforced, waterproof labels
- Used on Manual Battery Switches (p. 30-34)



Part #	7902
Quantity	18 Labels

# Protect Your Boat With the Correct Size Wire and Fuse



#### 1. Choose the Correct Wire

- a) Locate the CURRENT FLOW IN AMPS of your circuit
- b) Select the CIRCUIT TYPE
  - Non-critical circuits with 10% allowable voltage drop include: general lighting, windlasses, bait pumps, general appliances
  - Critical circuits with 3% allowable voltage drop include: panel main feeders, bilge blowers, electronics, navigation lights

#### c) Find the CIRCUIT LENGTH


The circuit length is the length of the negative wire added to the length of the positive wire.


Calculations are based on 105°C wire. For wire rated at 90°C or lower, or for wire that passes through an engine room, the first row of the chart does not apply.

d) Intersect the CURRENT FLOW IN AMPS with CIRCUIT LENGTH to identify the correct wire size Example: A windlass rated 80A is 25 ft. from the battery. The circuit length is the total length of the positive and negative wire added together, which in this example is 50 ft. The circuit type is 'non-critical', and the correct wire size is 4 AWG.

Calculations are based on 105°C wire. For more detailed calculations, download the Circuit Wizard app or go to circuitwizard.bluesea.com

#### WIRE SELECTION CHART

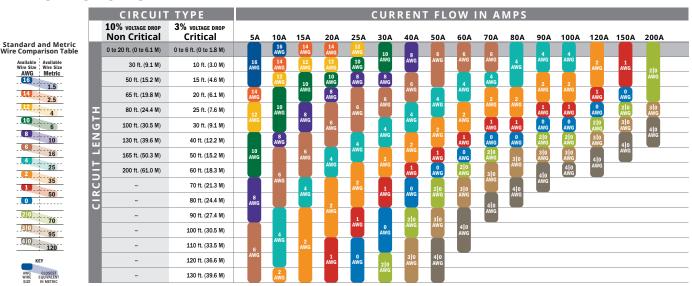

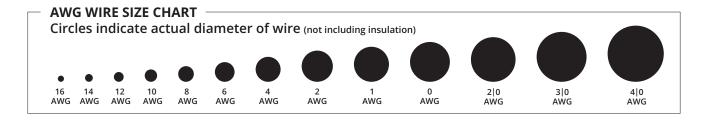

Although this process uses information from ABYC E-11 to recommend wire size and circuit protection, it may not cover all of the unique characteristics that may exist on a boat. If you have specific questions about your installation please consult an ABYC certified installer.

160 APPENDIX bluesea.com

#### 2. Choose the Correct Fuse and Fuse Amperage

a) Choose a fuse type by following the line of the AWG WIRE SIZE determined from the Wire Selection Chart Appropriate fuses will have an amperage that intersects the AWG Wire Size line.

#### b) The appropriate fuse amperage will be found in one of the four gray bars below the fuse type

- Single Wire, Outside Engine Room = First column dark gray bar
- Single Wire, Inside Engine Room = First column light gray bar
- Bundled Wire, Outside Engine Room = Second column dark gray bar
- Bundled Wire, Inside Engine Room = Second column light gray bar

Example: For a 4 AWG single 105°C rated wire outside an engine room, the maximum fuse amperage is 150A.


Note: Possible fuse amperages for a circuit can fall between a range of maximum and minimum fuse amperages. The procedure in step 1 calculates the maximum fuse amperage which reduces nuisance blows but may offer less protection than a lower amperage fuse. The minimum fuse amperage is calculated by multiplying the current flow in amps by 125%. If the product instructions specify a fuse amperage, use that value if it is under the maximum amperage found in the step 1 procedure. If the specified fuse amperage is over the maximum suggested, move down the column and choose the wire size that intersects with the specified fuse amperage.

Calculations are based on 105°C wire. For more detailed calculations, download the Circuit Wizard app or go to circuitwizard.bluesea.com

Fuse types selected should be verified to carry an ampere interrupting capacity (AIC) that meets the requirements of ABYC E-11.10.1.2.2 or E-11.10.1.2.3, based on the total capacity of the battery or battery bank supplying current through the fuse. This should include all batteries or banks that could be put in parallel through the use of a battery selection, or cross connection switch if the fuse is installed on the load side of the switch.

#### **FUSE SELECTION CHART**

E	E N D Outside Engine Room	AGC®		ATO® or ATC Fuse	;®	MAXI <sup>®</sup> Fuse		AMI® or MIDI Fuse		MRBF TERMINA Fuse	r 🔘	MEGA or AMG Fuse		CLASS Fuse	T	CLASS Fuse	T	ANL® Fuse	
E	nside Ingine Room	.25A t	o 30A	1A to	30A	30A t	to 80A	30A to	200A	30A to	300A	100A t	o 300A	110A t	o 200A	225A t	o 400A	35A to	400A
		SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES	SINGLE WIRE	BUNDLED WIRES
	16 AWG	25A 20A	20A <b>15A</b>	25A 20A	20A 15A														
	14 AWG	30A	25A 20A	30A	25A 20A	30A 30A		30A 30A		30A 30A									
	12 AWG		30A 25A		30A 25A	50A 40A	30A	50A 40A	30A	50A 40A	30A							35A	
ш	10 AWG					60A 50A	40A 40A	60A 50A	40A 40A	60A 50A	40A 40A							50A 40A	40A 35A
SIZ	8 AWG					80A 70A	60A 50A	80A 70A	60A <b>50A</b>	80A 70A	60A <b>50A</b>							80A 60A	50A 40A
S	6 AWG						80A <b>70A</b>	125A 100A	80A <b>70A</b>	125A 100A	80A <b>70A</b>	125A 100A		125A 100A				130A 100A	70A 60A
<u>æ</u>	4 AWG							150A 125A	125A 100A	150A 125A	125A 100A	150A 125A	125A 100A	175A 150A	110A			150A 130A	100A 80A
≥	2 AWG							200A 175A	150A 125A	200A 175A	150A 125A	200A 175A	150A 125A	200A 175A	150A 125A			200A 175A	150A 130A
<b>5</b>	1 AWG						_	200A	175A <b>- 150A</b>	250A <b>-200A</b>	175A <b>-150A</b>	250A 200A	175A -150A	200A	175A 150A	250A		250A <b>200A</b>	175A - 150A -
≥	0 AWG								200A <b>175A</b>	300A <b>250A</b>	200A <b>175A</b>	300A 250A	200A 175A		200A <b>175A</b>	300A <b>250A</b>		300A <b>250A</b>	200A 175A
⋖	2 0 AWG									300A	225A <b>200A</b>	300A	225A 200A		200A	350A 300A	225A	350A <b>300A</b>	225A 200A
	3 0 AWG										250A <b>225A</b>		250A <b>225A</b>			400A 350A	250A <b>225A</b>	400A 350A	250A 225A
	4 0 AWG										300A <b>250A</b>		300A <b>250A</b>			400A 400A	300A <b>250A</b>	400A 400A	300A <b>250A</b>

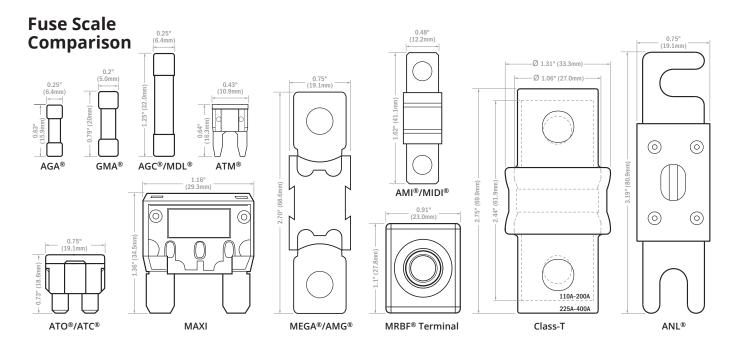

bluesea.com APPENDIX 161


#### 3. Choose the Fuse Holder

a) Using the fuse type chosen from the Fuse Selection Chart, follow the column down to find fuse holders or fuse blocks that meet your specific requirements

- b) Consider environmental factors:
- Ignition protection is required where flammable vapors may accumulate
   Example: Engine room and propane locker

   Consult American Boat and Yacht Council (ABYC) E-11.5.3 for Ignition Protection
- Ingress protection protects fuses from spray, washdown, and humidity. IP66-protected against powerful water jets
- c) Decide between an in-line fuse holder or a fuse block:
  - In-line fuse holders are compact and hold a single low-amperage fuse
  - Fuse blocks mount to a solid surface and may hold a single fuse or multiple fuses

#### FUSE HOLDER SELECTION CHART

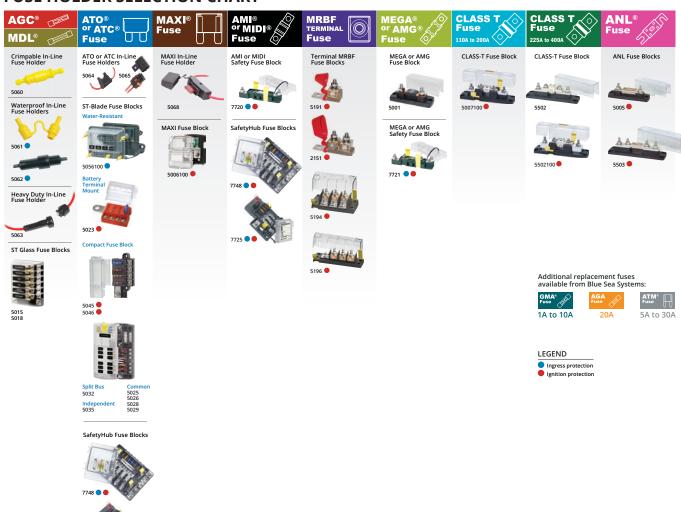

162 APPENDIX bluesea.com


# Battery Management Wiring Schematics for Typical Applications

Batteries are at the heart of the electrical system found on any boat or vehicle. Proper battery management, including switching and charging, is essential for safe and reliable operation. The following wiring diagrams show how batteries, battery switches, and Automatic Charging Relays are wired together from a simple 1 battery - 1 engine configuration to a 4 battery - 2 engine - 1 generator system. For more detailed wiring guidelines please consult a qualified marine electrician or one of the many books available on the subject.

Note: The ACRs pictured are representative of any ACR. The battery switches are representative of any battery switch of the same contact configuration.


# **1 Battery - 1 Engine** Switches a single battery to a single load group.

**ON-OFF Battery Switch** 



#### Saves battery power for starting.

- 1 ON-OFF Battery Switch
- 1 Low Voltage Disconnect



#### 2 Battery - 1 Engine

Switches isolated battery banks to all loads or combines battery banks to all loads.

1 Selector Battery Switch

1 Automatic Charging Relay

Engine


Start

House

Note: Uses same style batteries


# Simultaneously switches two isolated battery banks or combines battery banks to all loads.

- 1 Dual Circuit Plus™ Battery Switch
- 1 Automatic Charging Relay




#### Can isolate a failed battery.

- 3 ON-OFF Battery Switches
- 1 Automatic Charging Relay



#### 2 Battery - 2 Engine

House battery is shared with one engine. One engine battery is in reserve.



Parallel - Set all switches to position 1+2 Isolate - Set Load switch to position 2 and Source Switch to position 1+2


## Engines share one battery. House battery is in reserve.

1 Dual Circuit Plus™ Battery Switch
1 Automatic Charging Relay

Engine

Engine


House



**APPENDIX** 163 bluesea.com

**3 Battery - 2 Engine**Can isolate any battery source from any batteries.

- 3 Selector Battery Switches
- 2 Automatic Charging Relays

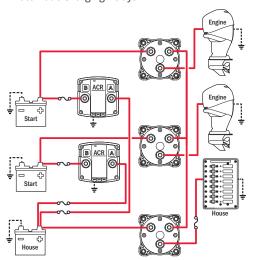


Normal - Set all switches to position 1

Parallel - Set all switches to position 1+2


Isolate - Set Load switch to position 2 and Source Switch to position 1+2

#### Can parallel batteries for extra starting power.

- 2 Dual Circuit Plus™ Battery Switches
- 2 Automatic Charging Relays

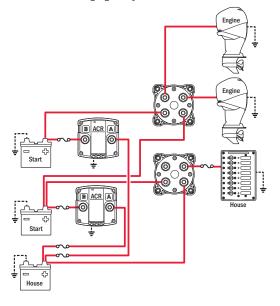

# **4 Battery - 2 Engine - 1 Generator** Can isolate any battery source from any batteries.

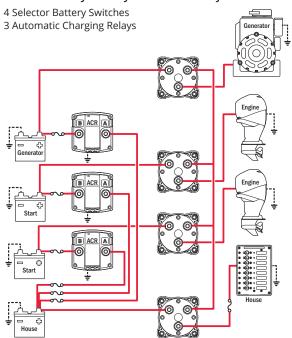


Normal - Set all switches to position 1

Parallel - Set all switches to position 1+2

Isolate - Set Load switch to position 2 and

Source Switch to position 1+2

#### Can parallel batteries for extra starting power.

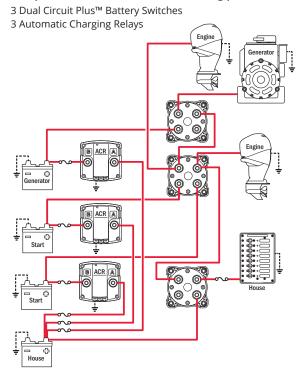

LEGEND

DC Positive DC Ground ----- 164 APPENDIX bluesea.com

# DC Main Circuit Protection and Branch Circuit Protection

#### Purpose

Fuses and circuit breakers are used to protect wire insulation from melting and starting fires in the event of overcurrents or short circuits which cause more amperage to flow in a wire than that wire is rated to carry. It is important to note that, except for those wires that are intended to carry starting currents, every positive wire in the DC Main Power Distribution System must be protected by a fuse or circuit breaker.

#### **Considerations for DC Main Circuit Protection**

Mounting Placement - distance from power source. The DC Main circuit protection system uses circuit breakers or fuses to protect the wires of the DC Main distribution system. The American Boat and Yacht Council (ABYC) publishes voluntary standards for the type and placement of the fuse or circuit breaker to be used as a DC Main circuit protection device. Wire intended to carry engine starting currents between the batteries, the switch, and the starter is not required to have main circuit protection devices installed. Maximum mounting placement dimensions for a fuse or circuit breaker are 7" if the conductor is not housed in a sheath or enclosure in addition to the wire insulation, 40" if the conductor is housed in a sheath or enclosure in addition to the wire insulation, and 72" if the conductor is connected directly to the battery and housed in a sheath or enclosure in addition to the wire insulation.

#### **Selecting DC Main Circuit Protection**

The principal attribute of a DC Main circuit protection device is its Ampere Interrupt Capacity (AIC) rating. Specifications listed in the ABYC standards determine the AIC a DC Main circuit protection device must have. The required AIC rating is determined by the <u>total</u> CCA of the batteries connected to the circuit. See the tables at right for the required AIC ratings.

Wire selection for DC applications on boats is usually based on voltage drop requirements. However, there is a maximum continuous current that the wire can withstand without overheating. Higher grade marine wires are rated for service up to 105°C (221°F)—the ABYC wire capacity table for 105°C is most frequently quoted. The 105°C table accurately reflects the capacity of single conductors exposed to freely circulating cooling air. However, other factors, such as covering bundles of wire in outer jackets to form a cable, or use of conduits or structural voids to protect wires, can reduce the cooling and reduce the safe capacity of the wire. A more conservative strategy is to use the 105°C wire, but treat it according to the 75°C table above when selecting circuit protection unless the wire is openly exposed for cooling.

See the Blue Sea Systems Circuit Wizard at circuitwizard.bluesea.com or pages 159-161 for more assistance with wire and circuit protection selection.

#### **ABYC Interrupt Rating Table**

Total Connected Battery Cold Cranking Amper	Ampere Interrupt Capacity								
12V									
The white boxes identify two batteries, of the same size placed in parallel configuration.	DC MAIN	DC BRANCH							
G24 OR G27	650 CCA or Less	1,500 AIC	750 AIC						
G24 + G24 OR G27 + G27 OR 4D	651-1,100 CCA	3,000 AIC	1,500 AIC						
8D OR 4D + 4D	1,101-2,200 CCA	5,000 AIC	2,500 AIC						
8D + 8D	>2,200 CCA	20,000 AIC @ 125V DC or battery short circuit rating	3,000 AIC						
32V									
	1,250 CCA or Less	3,000 AIC	1,500 AIC						
	Over 1.250 CCA	5.000 AIC	2.500 AIC						

<sup>\*</sup> Battery cold cranking performance rating at -17.8°C (0°F): The discharge load in amps that a battery at -17.8°C (0°F) can deliver for 30 seconds, and maintain a voltage of 1.2V per cell or higher, (e.g. 7.2V for a 12V battery). The CCA for the battery icons in this chart is an approximation and could be slightly higher or lower. Consult the battery manufacturer's specifications for precise CCA ratings. A battery rated in MCA will have a CCA capacity approximately 80% of MCA

ABYC E-11 requires the use of circuit breakers that can be reused and reset and that they be applied as per the table above. The standard does not strictly require that fuses be applied in the same way, but it is an issue to consider, especially with high amp fuses used to protect panel feeders or inverters. Fuses under 10 Amp rating generally have such a high internal resistance they prevent fault currents from reaching 1000 Amps in 12 Volt circuits. The apparent contradiction when using these fuses for bilge pumps and other circuits directly off the battery is less of an issue than it might seem. If a fuse blows, and the case appears to be cracked or metal has been ejected, the fuse holder should be replaced.

#### ABYC Ampacity Rating Table at 30°C †

WIRE	SIZE		TE	EMP	ERAT	URE	RATII	NG OI	CONI	DUCT	OR IN	ISULA	NOITA	ı	REF	ERENCE	DATA
Standard	Metric	75	°C		90°C		105°0	2	75°C		90°C		105°0	:		Ohms	Ohms
AWG	mm²		E R	ng Rm		Eng Rm		Eng Rm		Eng Rm		Eng Rm		Eng Rm	mm dia	/1000ft	/1000n
	0.75	9.	5 7	7	19	15.5	19	16	6.6	5.0	13	11	13	11	0.98	7.29	23.92
18	0.82	10	8	3	20	16	20	17	7	5	14	12	14	12	1.02	6.67	21.88
	1.0	13	3 1	10	21	17	21	18	9	7	15	12	15	13	1.13	5.47	17.94
16	1.3	15	1	11	25	21	25	21	11	8	18	14	18	15	1.29	4.17	13.70
	1.5	16	5 1	12	24	20	29	24	11	9	17	14	20	17	1.38	3.65	11.96
14	2.1	20	1	15	30	25	35	30	14	11	21	17	25	21	1.63	2.63	8.63
	2.5	21	1	16	34	28	38	32	15	11	23	19	26	22	1.78	2.19	7.18
12	3.3	25	1	19	40	33	45	38	18	13	28	23	32	27	2.05	1.65	5.42
	4.0	34	. 2	25	46	38	51	43	24	18	32	27	35	30	2.26	1.37	4.49
10	5.3	40	) 3	30	55	45	60	51	28	21	39	32	42	36	2.59	1.04	3.41
	6.0	53	3 4	10	57	47	65	55	37	28	40	33	45	39	2.76	0.91	2.99
8	8.4	65	4	19	70	57	80	68	46	34	49	40	56	48	3.27	0.65	2.14
	10.0	79	6	50	84	69	100	85	56	42	59	48	70	60	3.6	0.55	1.79
6	13.3	95	7	71	100	82	120	102	67	50	70	57	84	71	4.1	0.41	1.35
	16.0	10	5 7	79	113	93	134	114	73	55	79	65	94	80	4.5	0.34	1.12
4	21	12	25 9	94	135	111	160	136	88	66	95	78	112	95	5.2	0.26	0.85
	25	14	1 1	106	150	123	175	148	99	74	105	86	122	104	5.6	0.22	0.72
3	27	14	15 1	109	155	127	180	153	102	76	109	89	126	107	5.8	0.21	0.67
2	34	17	70 1	128	180	148	210	179	119	89	126	103	147	125	6.5	0.16	0.53
	35	17	73 1	130	186	153	217	185	121	91	130	107	152	129	6.7	0.16	0.51
1	42	19	95 1	146	210	172	245	208	137	102	147	121	172	146	7.3	0.13	0.42
	50	22	20 1	165	235	193	273	232	154	116	164	135	191	163	8.0	0.109	0.36
0	54	23	80 1	173	245	201	285	242	161	121	172	141	200	170	8.3	0.102	0.34
00	68	26	55 1	199	285	234	330	281	186	139	200	164	231	196	9.3	0.081	0.27
	70	27	4 2	206	292	239	341	289	192	144	204	168	238	203	9.4	0.078	0.26
000	85	31	0 2	233	330	271	385	327	217	163	231	189	270	229	10.4	0.064	0.21
	95	33	34 2	251	357	293	413	351	234	175	250	205	289	246	11.0	0.058	0.19
0000	107	36	0 2	270	385	316	445	378	252	189	270	221	312	265	11.7	0.051	0.17
	120	38	37 2	290	414	339	478	406	271	203	290	237	335	284	12.4	0.046	0.15
	150	44	15 3	333	476	390	550	467	311	233	333	273	385	327	13.8	0.036	0.12

Data based on E-11 Table VI-A (single conductors in free air) (Up t

Data based on E-11 Table VI-B

SAE conductors are smaller than equivalent AWG by 5% to 12% with current capacity typically less by 7%. ISO Ratings for metric wire are slightly less than these values derived from ABYC VI-A ratings.

- For bundles of 4 to 6 conductors multiply by 0.857
- For bundles of 7 to 24 conductors multiply by 0.714
- For bundles of 25 or more, conductors multiply by 0.571

#### Wires counted in bundles need not include:

- Wires carrying intermittent currents no more than rating per VI-A and for less than one minute per mm of diameter, and not repeating more often than a delay of 5X times active duration.
- 2. Wires carrying load currents at less than 50% of the wire rating per table VI-B.

<sup>&</sup>lt;sup>†</sup> Thermally limited amperage capacity

APPENDIX 165

# AC Main Power Distribution and Circuit Protection


#### **Purpose**

bluesea.com

- Provide a path for delivering power from the ship's sources of AC power to the AC branch distribution system
- Provide a path for returning fault currents to ground via the green safety Ground wire
- Provide a means for disconnecting AC power when the boat is not in use or in emergencies
- Provide electrical separation to insure that two sources of AC power are never connected
- Provide circuit protection for neutral and line wires in the AC main system
- · Provide ground fault protection
- · Provide ELCI overload or leakage fault protection

#### **AC Wire Systems**

The three most common AC systems used on boats are shown here. In all cases the ground, sometimes called safety ground to clarify its purpose and differentiate it from the DC ground or negative, is said to be a "normally non-current carrying wire." Its purpose is to provide the lowest resistance path for AC currents that have strayed from their proper containment in the normally current carrying hot and neutral wires. The ground wire is connected to the exterior conductive parts of AC devices that could be touched by a person during normal operation, and it conducts errant AC currents safely to ground rather than passing them through a human body. The ground wire is never passed through a circuit breaker.

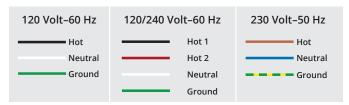


#### **Devices Qualifying as AC Main Circuit Breakers**


In order to qualify as an AC main circuit breaker, these characteristics must be present:


- The circuit breaker must have an Amperage Interrupt Capacity (AIC) meeting the requirements of the following tables.
- 2. The circuit breaker must be multiple pole, usually 2 or 3.
- 3. The circuit breaker must be rated for the appropriate AC system voltage in which it will be used.
- The circuit breaker must be available in amperages appropriate to the design amperage of the system. In the USA, this is generally 30A and 50A, while European systems are generally 16A and 32A.
- 5. The ELCI shall have a leakage trip mechanism that trips if current exceeding 30mA leaks to ground.

AC Shore Power Source	Main Circuit Breaker	Branch Circuit Breaker
120V - 30A	3,000	3,000
120V - 50A	3,000	3,000
120/240V - 50A	5,000	3,000
240V - 50A	5,000	3,000

Sources of AC power, whether shore power or onboard generators and inverters, should always have a circuit breaker near the power source. This circuit breaker is designated the AC main circuit breaker. The AC main circuit breaker should always have a pole for each of the hot and neutral wires in the circuit assuring that circuit protection functions are not compromised in reverse polarity situations. Beginning in July 2010 ABYC Standards require that an Equipment Leakage Circuit Interrupter (ELCI) with a 30mA leakage trip be installed in shore power applications as the first protective device after the power inlet. ELCIs respond to leakage of electrical current outside of the intended current path, and provide overload and short circuit protection. They serve as the main AC circuit breaker for the system. These devices will open all energized conductors and the neutral when opened manually or tripping on an overload or leakage fault. For a more complete discussion of ELCIs, see page 88.

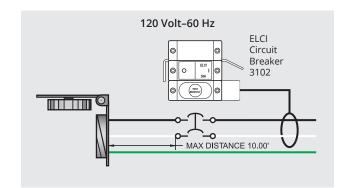

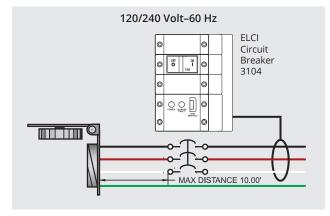

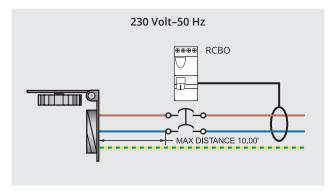

102, 107

103, 107

7081

78, 90

7206

82, 90

7290

84, 91

Part #	Page	Part #	Page	Part #	Page	Part #	Page	Part #	Page
7294	82, 90	7442	81, 90	7546	85, 90	7700100	43	7912	18
7295	82, 90	7443	81, 90	7547	85, 90	7701	40, 52	7920	18
7299	82, 90	7444	81, 90	7548	85, 90	7701100	40	7921	18
7310	80, 90	7445	81, 90	7549	85, 90	7702	43, 52	7928	92, 97
7311	80, 90	7446	81, 90	7554	85, 91	7702100	43	7929	92, 97
7312	80, 90	7454	81, 90	7560	85, 91	7703	40, 52	7930	92, 97
7313	80, 90	7455	81, 90	7561	85, 91	7703100	40	7931	92, 97
7314	80, 90	7456	81, 90	7563	85, 91	7713	43, 52	7932	92, 97
7315	80, 90	7457	81, 90	7564	85, 91	7713100	43	7933	92, 97
7316	80, 90	7458	81, 90	7565	85, 91	7717	43, 52	7934	92, 97
7317	80, 90	7459	81, 90	7568	85, 91	7717100	43	7935	92, 97
7347	82, 90	7461	81, 90	7574	83, 90	7718	40, 52	7936	92, 97
7348	82, 90	7462	81, 90	7575	83, 90	7718100	40	7937	92, 97
7349	82, 90	7463	81, 90	7577	83, 90	7719	40, 52	7938	92, 97
7350	84, 90	7464	81, 90	7580	85, 91	7719100	40	7939	92, 97
7351	84, 90	7465	81, 90	7581	85, 91	7720	70, 73	7943	92, 97
7352	84, 90	7466	81, 90	7583	85, 91	7721	70, 73	7944	92, 97
7353	84, 90	7467	81, 90	7584	85, 91	7725	71, 73	7945	92, 97
7354	84, 90	7475	85, 91	7585	85, 91	7748	71, 73	8003	140,
7355	84, 90	7476	85, 91	7588	85, 91	7765	39, 52	8005	140,
7365	84, 91	7477	85, 91	7601	46, 53	7820	21	8013	147
7372	125	7480	94, 97	7603	22	7821	21	8015	140
7399	83, 90	7481	94, 97	7604	22	7822	21	8017	140,
7400	83, 90	7482	94, 97	7605	22	7823	21	8018	140,
7401	83, 90	7483	94, 97	7606	22	7824	21	8019	140,
7402	83, 90	7484	94, 97	7607	22	7825	21	8022	140,
7403	83, 90	7485	94, 97	7608	22	7830	21	8023	119
7404	83, 90	7490	94, 97	7609	22	7831	21	8025	118
7405	83, 90	7491	94, 97	7610	47, 53	7832	21	8027	122
7406	83, 90	7492	94, 97	7611	50, 53	7833	21	8028	140,
7407	83, 90	7493	94, 97	7615	41, 53	7834	21	8029	122
7408	83, 90	7494	94, 97	7620	51, 53	7840	21	8030	154
7410	83, 90	7495	94, 97	7620100	51	7841	21	8031	154
7411	83, 90	7504	27	7621	51, 53	7850	21	8032	127
7412	83, 90	7506	27	7621100	51	7850001	21	8033	153
7413	83, 90	7507	27	7622	51, 53	7851	21	8034	153
7414	83, 90	7508	27	7622100	51	7851001	21	8037	96
7415	83, 90	7509	27	7623	51, 53	7860	21	8039	154
7416	83, 90	7512	19	7623100	51	7870	158	8041	140,
7417	83, 90	7517	20	7635	40, 53	7900	30	8043	122
7425	83, 90	7520	20	7649	48	7900200	30	8051	146
7427	83, 90	7531	19	7649003	48	7901	30	8053	114
7428	83, 90	7532	19	7650	48	7901200	30	8054	114
7429	83, 90	7540	85, 90	7650003	48	7902	158	8058	124
7430	83, 90	7541	85, 90	7653	49	7903	30	8059	124
7433	83, 90	7542	85, 90	7654	49	7903200	30	8061	127
	81, 90	7543	85, 90	7655	49	7910	18	8066	153
7440									

bluesea.com

Part #	Page	Part #	Dogo	Part #	Dage	Part #	Dogo	Part #	Page
8068	120	8199	Page 122	8266	Page 94	8381	Page 121	8585	123
8072	82	8200	96, 97	8267	94	8382	121	8588	123
8073	149	8204	96, 97	8268	94	8385	119	8589	127
8074	123	8205	96, 97	8271	114	8386	129	8598	127
8076	123	8206	96, 97	8272	114	8401	118	8599	127
8077	122	8207	96, 97	8273	114	8402	119	8664	113
8079	122	8208	96, 97	8274	114	8403	120	8665	113
8080	38	8209	96, 97	8275	92, 97	8405	122	8666	113
8081	118	8210	96, 97	8278	93	8406	123	8686	38
8082	119	8211	96, 97	8280	38	8407	123	8689	38
8084	130	8212	96, 97	8282	92, 97	8408	131	8690	38
8086	131	8214	154	8283	92, 97	8409	122	8693	38
8087	84	8216	92, 97	8284	92, 97	8410	147	9001E	32, 37
8088	84	8217	154	8285	92, 97	8411	124	9002E	32, 37
8089	84	8218	92, 97	8286	92, 97	8412	122	9003E	32, 36
8095	130	8219	92, 97	8287	92, 97	8413	130	9004E	32, 36
8096	118	8220	92, 97	8288	92, 97	8421	114	9009	128
8097	124	8221	92, 97	8289	92, 97	8461	125	9010	128
8099	122	8222	92, 97	8290	92, 97	8462	127	9011	128
8100	126	8230	92, 97	8291	92, 97	8464	123	9012	39, 52
8101	126	8231	92, 97	8292	92, 97	8465	123	9019	129
8102	126	8232	92, 97	8293	93	8466	127	9030B	108
8110	145, 148	8233	92, 97	8294	93	8467	127	9031B	108
8120	118	8234	92, 97	8295	93	8478	124	9038B	108
8121	114	8235	146, 148	8296	93	8479	125	9039B	108
8127	122	8236	146, 148	8297	93	8480	124	9040B	108
8129	122	8237	147, 148	8298	93	8485	123	9041B	108
8132	127	8238	147, 148	8299	93	8488	123	9077	129
8134	153	8240	140, 148	8300	92, 97	8489	127	9093	129
8143	122	8244	141, 148	8357	128	8498	127	9159	30
8158	124	8245	141, 148	8358	128	8499	127	9160	43
8159	124	8246	141, 148	8359	128	8505	122	9176B	108
8161	127	8247	147, 148	8361	129	8506	123	9177B	108
8165	125	8248	146, 148	8363	129	8507	123	9216	103
8166	153	8251	146, 148	8365	128	8508	131	9217	103
8167	153	8252	140, 148	8366	128	8509	122	9218	103
8169	153	8253	140, 148	8367	128	8511	124	9228	149
8171	153	8255	149, 148	8369	129	8512	122	9230	149
8172	153	8256	149	8371	114	8521	114	9231	149
8173	82	8257	149	8371	114	8561	125	9233	149
8174	123	8258	141, 148	8373	114	8562	127	9353	141, 148
8176	123	8259	94	8374	114	8564	123	9354	141, 148
8177	123	8260	94	8375	119	8565	123	9630	141, 148
8177	122	8260	114	8376	120	8566	123	J030	141, 140
8184	130	8262	114	8377	120	8567	127		
8186	131	8262	113	8378	120	8578	127		
8195				8378			124		
	130	8264	121		120	8579			
8197	124	8265	125	8380	121	8580	124		

# Ingress Protection (IP) Ratings Guide


Example:

An IP65 rating can be determined using the adjacent table and example:

- The first number of the rating example,
  6, in the gray column means the enclosure is dust tight
- The second number of the rating example,
  5, in the blue column means the enclosure is protected against jets of water

The IP rating system was established by the International Electrotechnical Commission (IEC), an organization for international standards and conformity assessment. The IEC collaborates closely with the International Organization for Standardization (ISO). A complete description of the IP ratings and associated tests is found in IEC Publication 529. Although these ratings were initially developed as a way to classify enclosures, they now provide a convenient, practical way to compare levels of sealing. Many electrical products have an Ingress Protection (IP) rating which identifies the environmental factors needing consideration prior to the product's installation.

This is important when deciding when to mount products in a dry and clean environment versus a wet and/or dusty environment. The IP rating indicates the degree of protection provided. The numbers following IP represent levels of sealing and can range from no protection to full protection against dust and water. The table provides a description of the protection at each level.

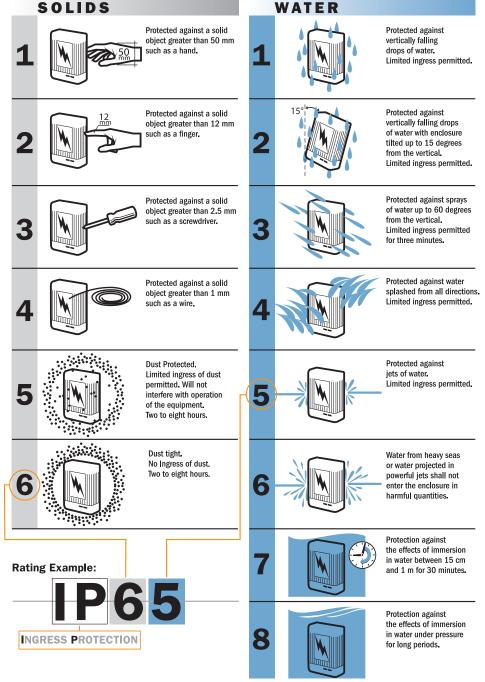











#### Blue Sea Systems

N85 W12545 Westbrook Crossing Menomonee Falls, WI 53051 USA p 800.307.6702 p 800.222.7617 Blue Sea Systems f 800.799.3779

#### **New Zealand**

42 Apollo Drive Rosedale, Auckland 0632 New Zealand p +64.9.415.7261 f +64.9.415.9327

#### The Netherlands

Snijdersbergweg 93 1105 AN Amsterdam The Netherlands p +31(0)20 34 22 100 f +31(0)20 69 71 006

tech.bluesea@oneasg.com bluesea.com

© 2023 Navico Group. All Rights Reserved. Navico Group is a division of Brunswick Corporation.

 ${
m @Reg.~U.S.~Pat.~\&~Tm.~Off,~and~^{
m M}}$  common law marks. Visit www.navico.com/intellectual-property to review the global trademark rights for Navico Group.

Unauthorized copying or reproduction is a violation of applicable laws.

BSS\_CAT\_001\_0523